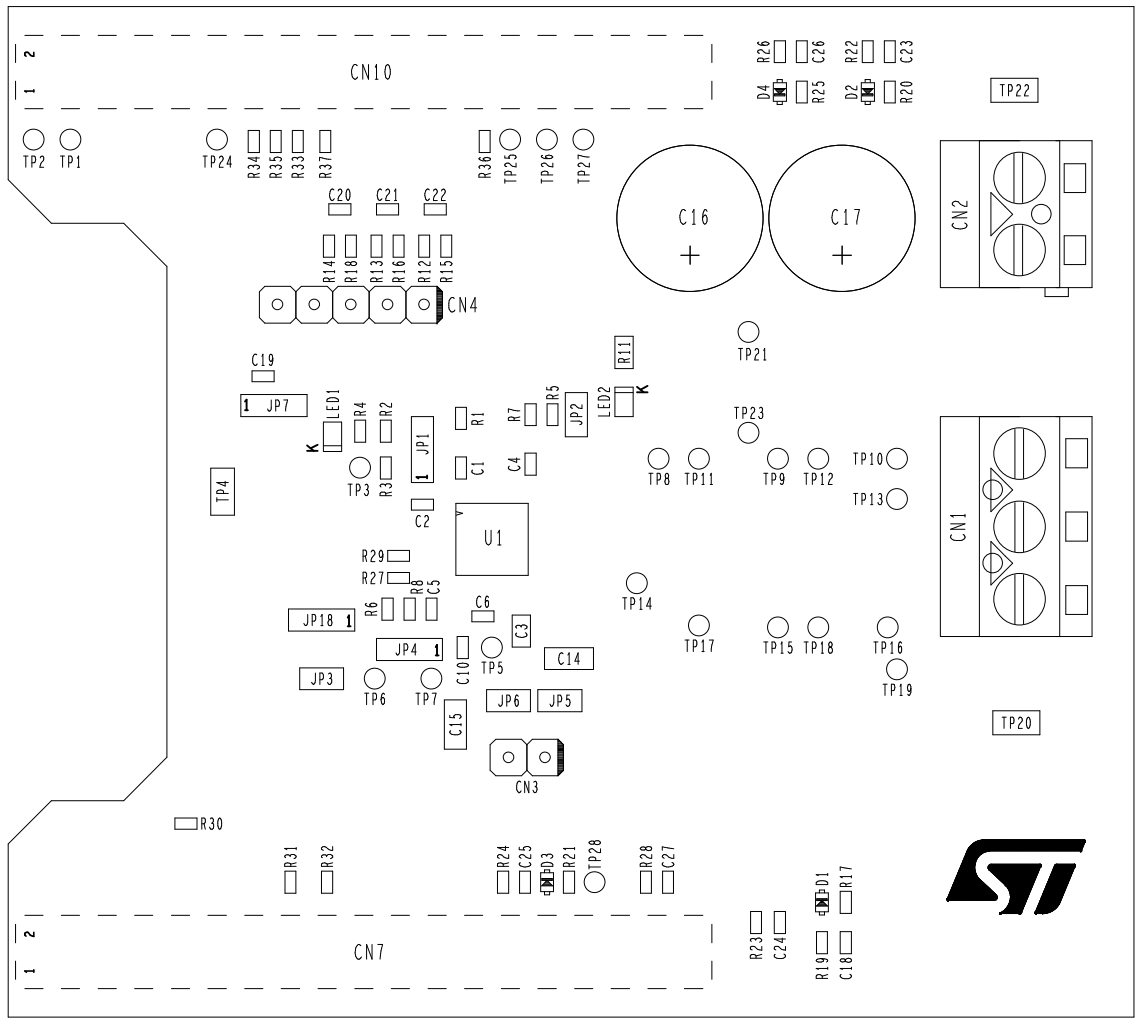


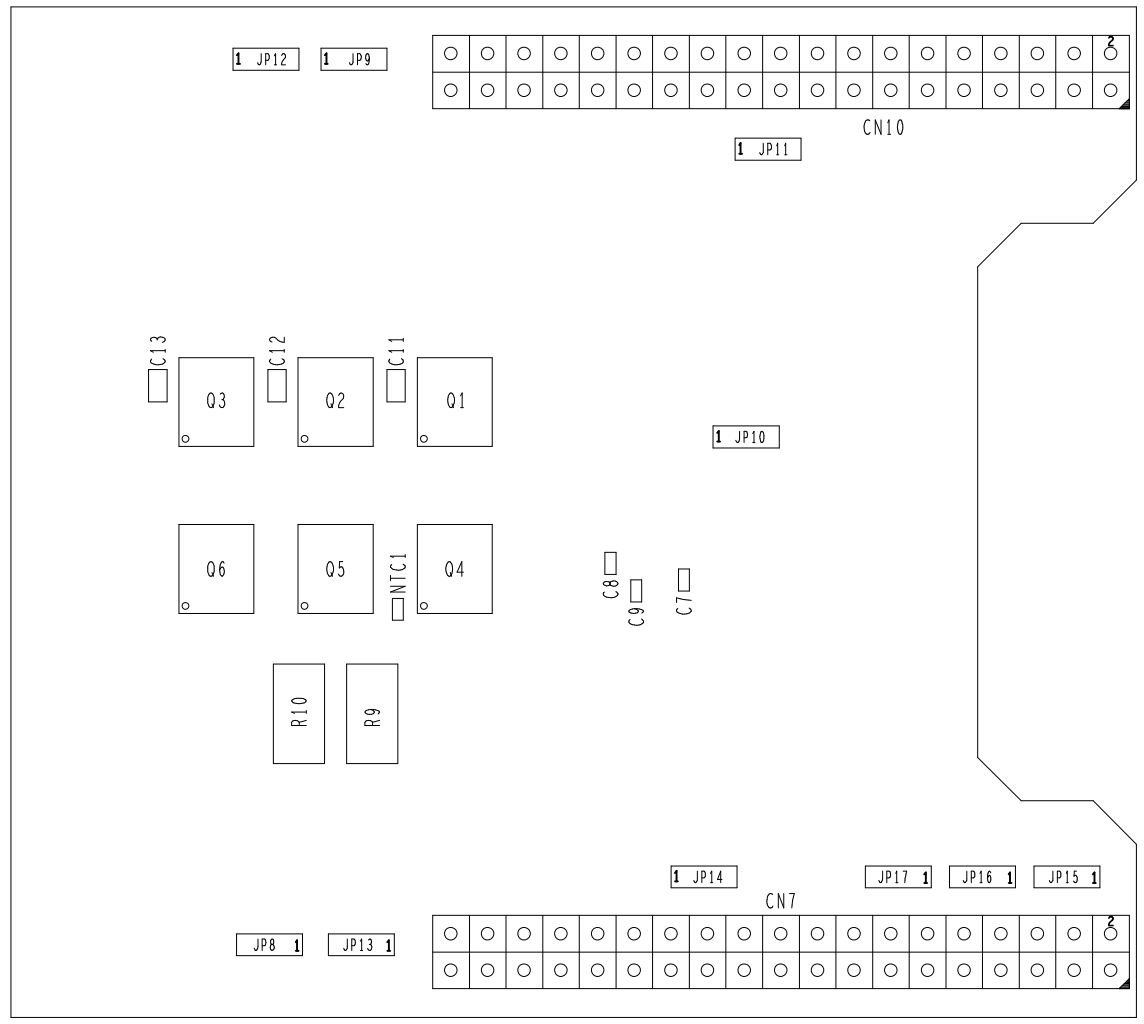


When THT components aren't mounted, your holes must remain OPEN after solder phase

REVISION DATE

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| ASP, AMS Group AGRATE B. ITALY | | Description: ASSEMBLY DRAWING | | | | | | Symbol: STDRIVE102P | |
| | | | | | | | | Group: Eval Board | |
| ALL RIGHTS STRICTLY RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION FROM STMicroelectronics. | | TOLERANCE UNLESS NOTED UNIT=MM (MILS) | | | | | | ISO | SCALE: 2 : 1 / REV. 1.0 |
| | | linear | 0 <10 | >10 <50 | >50 <200 | >200 | ANG. LES. | Material | |
| Drawn: Rigo M. | date: 09-Oct-2023 | midle | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±1° | | |
| Approved | date | accurate | ±0.05 | ±0.1 | ±0.15 | ±0.25 | ±30' | Treatment and surface finishing | |