

## Discovery kit with STM32H7B3LI MCU

### Introduction


The **STM32H7B3I-DK** Discovery kit is a complete demonstration and development platform for STMicroelectronics' Arm® Cortex®-M7 core-based **STM32H7B3LIH6Q** microcontroller. This microcontroller features four I<sup>2</sup>C interfaces, six SPIs with four multiplexed full-duplex I<sup>2</sup>S interfaces, two SDMMC controllers, five USARTs, five UARTs, one ULPUART, one TTFD-CAN, one CAN FD, two 16-bit ADCs, two 12-bit DACs, two SAIs, two Octo-SPI interfaces, two analog comparators, one SPDIF-RX, DFSDM (eight channels/eight filters), one USB OTG HS and one USB OTG FS, DCMI interface, FMC interface, TFT LCD controller interface, JTAG, and SWD debugging support.

This STM32H7B3I-DK Discovery kit offers everything required for users to get started quickly and develop applications easily.


The hardware features on the board help to evaluate the following peripherals: USB HS OTG, microSD™ card, 8-bit camera interface, audio DAC stereo with audio jack input and output, 128-Mbit SDRAM memory, 512-Mbit Octo-SPI flash memory, Wi-Fi® module (802.11 b/g/n compliant), I<sup>2</sup>C extension connector, CAN FD, 20-pin MEMS microphone connector with DFSDM interface, 4.3-inch TFT LCD (480\*272) using an RGB interface with a capacitive touch panel. The ARDUINO® Uno V3 compatible and STMod+ connectors allow easy connection of extension shields or daughterboards for specific applications.

The integrated STLINK-V3E provides an embedded in-circuit debugger and programmer for the STM32 MCU.

**Figure 1. STM32H7B3I-DK top view**

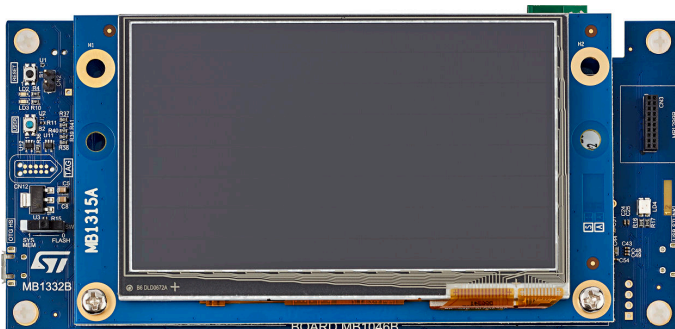

**Figure 2. STM32H7B3I-DK bottom view**

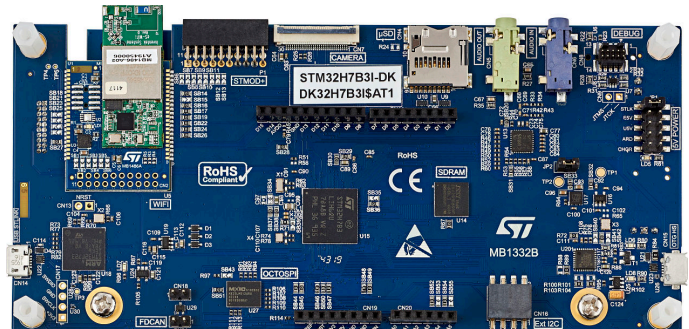

*Pictures are not contractual.*

## 1 Features

- **STM32H7B3LIH6Q** Arm®-based microcontroller featuring 2 Mbytes of flash memory and 1.4 Mbytes of RAM in a BGA225 package
- 4.3" (480x272 pixels) TFT color LCD module including a capacitive touch panel with RGB interface
- Wi-Fi® module compliant with 802.11 b/g/n
- USB OTG HS
- Audio codec
- 512-Mbit Octo-SPI NOR flash memory
- 128-Mbit SDRAM
- Two user LEDs
- User and reset push-buttons
- Fanout board
- CAN FD
- Board connectors:
  - 8-bit camera
  - USB with Micro-AB
  - Stereo headset jack including analog microphone input
  - Audio jack for external speakers
  - microSD™ card
  - Tag-Connect™ 10-pin footprint
  - Arm® Cortex® 10-pin 1.27mm-pitch debug connector over STDC14 footprint
  - ARDUINO® Uno V3 expansion connector
  - STMod+ expansion connector
  - Audio daughterboard expansion connector
  - External I²C expansion connector
- Flexible power-supply options: ST-LINK USB V<sub>BUS</sub>, USB connector, or external sources
- On-board STLINK-V3E debugger/programmer with USB re-enumeration capability: mass storage, Virtual COM port, and debug port
- Comprehensive free software libraries and examples available with the STM32Cube MCU Package
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR Embedded Workbench®, MDK-ARM, and STM32CubeIDE

*Note:* Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

**arm**

## 2 Ordering information

To order the STM32H7B3I-DK Discovery kit, refer to [Table 1](#). Additional information is available from the datasheet and reference manual of the target STM32.

**Table 1. Ordering information**

Order code	Board references	Target STM32
STM32H7B3I-DK	<ul style="list-style-type: none"> <li>• MB1332<sup>(1)</sup></li> <li>• MB1315<sup>(2)</sup></li> <li>• MB1280<sup>(3)</sup></li> <li>• MB1486<sup>(4)</sup></li> </ul>	STM32H7B3LIH6Q

1. Main board
2. LCD daughterboard
3. Fanout board
4. Wi-Fi<sup>®</sup> module

### 2.1 Codification

The meaning of the codification is explained in [Table 2](#). The order code is mentioned on a sticker placed on the top or bottom side of the board.

**Table 2. Codification explanation**

STM32XXYYZ-DK	Description	Example: STM32H7B3I-DK
XX	MCU series in STM32 32-bit Arm Cortex MCUs	STM32H7 series
YY	MCU product line in the series	STM32H7A3/7B3
Z	STM32 flash memory size: • I for 2 Mbytes	2 Mbytes
-DK	Discovery kit	Discovery kit

## 3 Development environment

### 3.1 System requirements

- Multi-OS support: Windows® 10, Linux® 64-bit, or macOS®
- USB Type-A or USB Type-C® to Micro-B cable

*Note:* macOS® is a trademark of Apple Inc., registered in the U.S. and other countries and regions.  
Linux® is a registered trademark of Linus Torvalds.  
Windows is a trademark of the Microsoft group of companies.

### 3.2 Development toolchains

- IAR Systems® - IAR Embedded Workbench®<sup>(1)</sup>
- Keil® - MDK-ARM<sup>(1)</sup>
- STMicroelectronics - STM32CubeIDE

1. On Windows® only.

### 3.3 Demonstration software

The demonstration software, included in the STM32Cube MCU Package corresponding to the on-board microcontroller, is preloaded in the STM32 flash memory for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from [www.st.com](http://www.st.com).

### 3.4 CAD resources

All board design resources, including schematics, CAD databases, manufacturing files, and the bill of materials, are available from the [STM32N6570-DK](http://www.st.com) product page at [www.st.com](http://www.st.com).

## 4 Conventions

Table 3 provides the conventions used for the ON and OFF settings in the present document.

**Table 3. ON/OFF convention**

Convention	Definition
Jumper JPx ON	Jumper fitted
Jumper JPx OFF	Jumper not fitted
Jumper JPx [1-2]	Jumper fitted between pin 1 and pin 2
Solder bridge SBx ON	SBx connections closed by 0 $\Omega$ resistor
Solder bridge SBx OFF	SBx connections left open
Resistor Rx ON	Resistor soldered
Resistor Rx OFF	Resistor not soldered
Capacitor Cx ON	Capacitor soldered
Capacitor Cx OFF	Capacitor not soldered

## 5 Safety recommendations

---

### 5.1 Targeted audience

This product targets users with at least basic electronics or embedded software development knowledge such as engineers, technicians, or students. This board is not a toy and is not suited for use by children.

### 5.2 Handling the board

This product contains a bare printed circuit board and like all products of this type, the user must be careful about the following points:

- The connection pins on the board might be sharp. Be careful when handling the board to avoid hurting yourself
- This board contains static-sensitive devices. To avoid damaging it, handle the board in an ESD-proof environment.
- While powered, do not touch the electric connections on the board with your fingers or anything conductive. The board operates at a voltage level that is not dangerous, but components might be damaged when shorted.
- Do not put any liquid on the board and avoid operating the board close to water or at a high humidity level.
- Do not operate the board if dirty or dusty.

### 5.3 Delivery recommendations

Before the first use, make sure that no damage occurred to the board during shipment, and that all socketed components are firmly fixed in their sockets or loose in the plastic bag.

In particular, pay attention to the MB1315 LCD daughterboard in the CN1 connector.

## 6 Getting started

1. Ensure that the JP1 jumper is set to STLK.
2. Connect a Type-A to Micro-B USB cable from the STM32H7B3I-DK board (Connect USB STLINK CN14) to a PC to power the board. Then LD5 (+5V) and LD4 (STLINK COM) light up.
3. Take advantage of the three graphical stacks running on the same board with many featured applications for each selected subdemonstration:
  - Menu launcher
  - Audio player TGFX application (MP3 support)
  - Clock and weather with alarm feature
  - Video player TGFX application (enabled)
  - TGFX graphic demonstration
  - STemWin graphic demonstration
  - EWZ graphic demonstration
4. The demonstration application software as well as other software examples and applications for exploring STM32H7 features are available from [STM32H7B3I-DK](#).

*Note:* The audio and video player applications play audio and video files from the microSD™ card.

## 7 Hardware layout and configuration

The STM32H7B3I-DK Discovery kit is designed around the STM32H7B3LIH6Q target microcontroller packaged in TFBGA225. The hardware block diagram, shown in Figure 3, illustrates the STM32H7B3LIH6Q connections with the peripheral components. Figure 4 and Figure 5 show the location of the main components on the two sides of the Discovery board.

Figure 3. STM32H7B3I-DK hardware block diagram

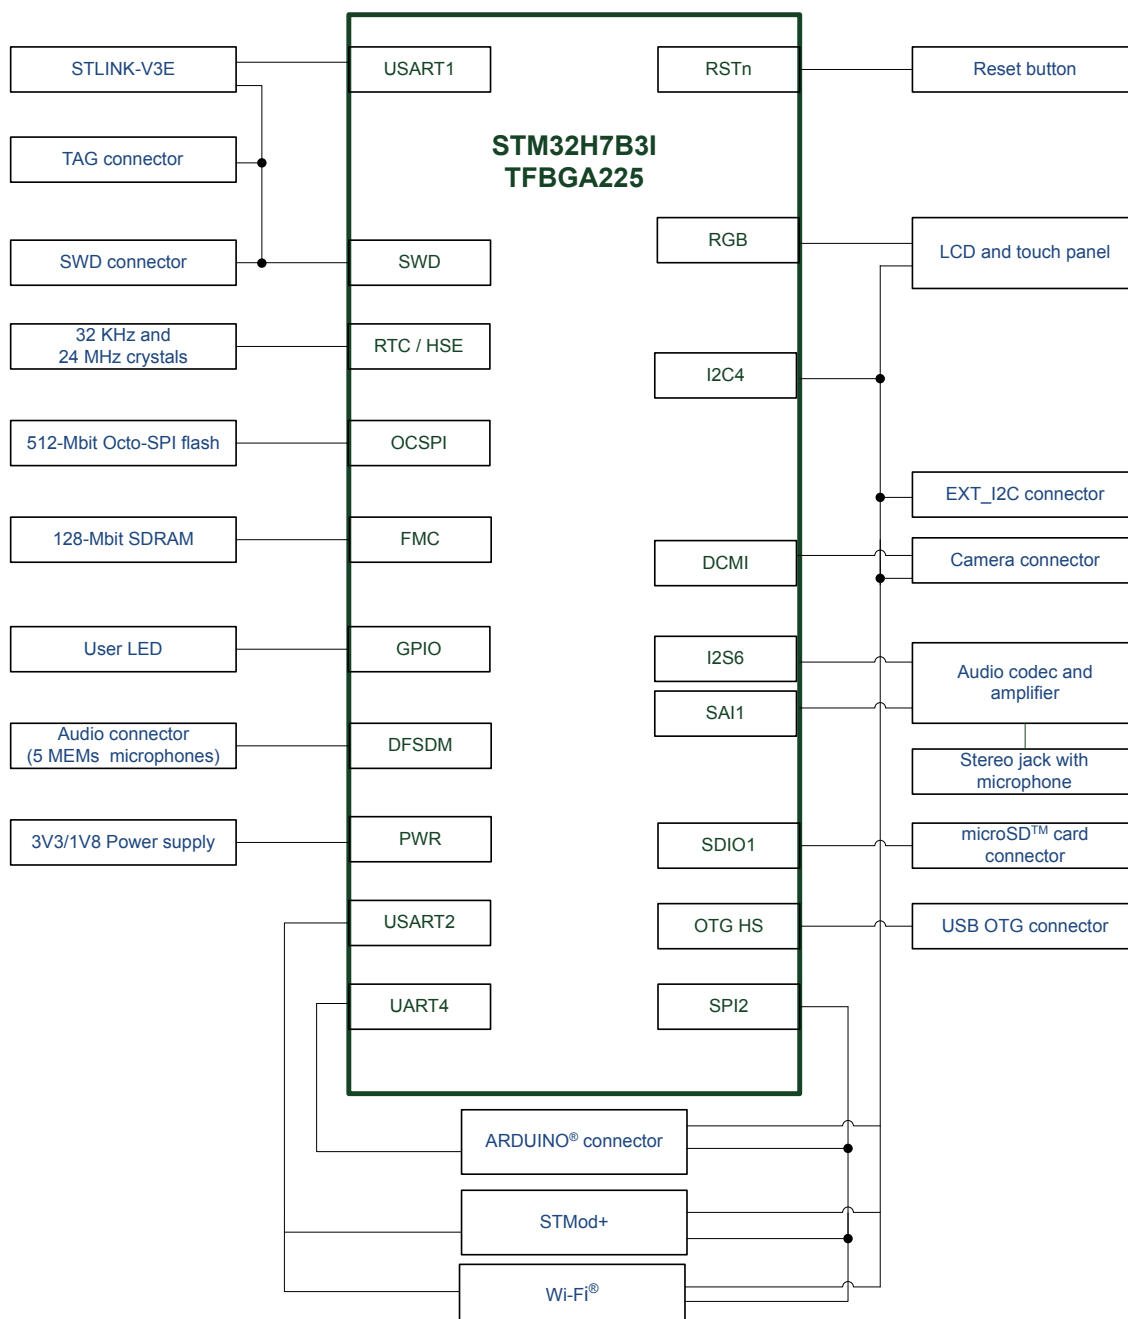




Figure 4. STM32H7B3I-DK PCB layout (top view)

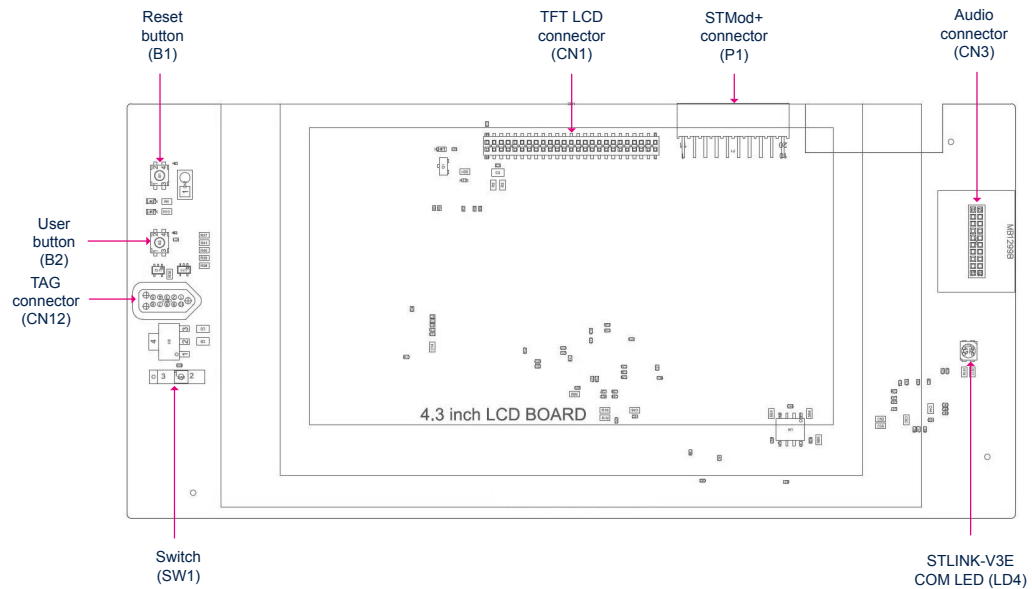


Figure 5. STM32H7B3I-DK PCB layout (bottom view)



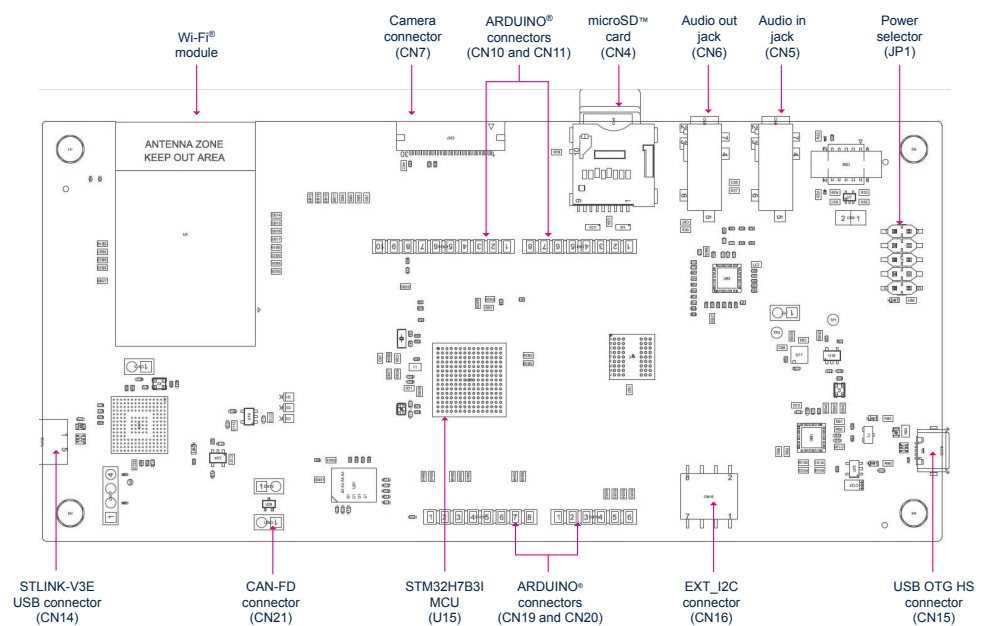


Figure 6 and Figure 7 provide the mechanical dimensions of the STM32H7B3I-DK board.

**Figure 6. STM32H7B3I-DK board mechanical dimensions (top view, in millimeters)**

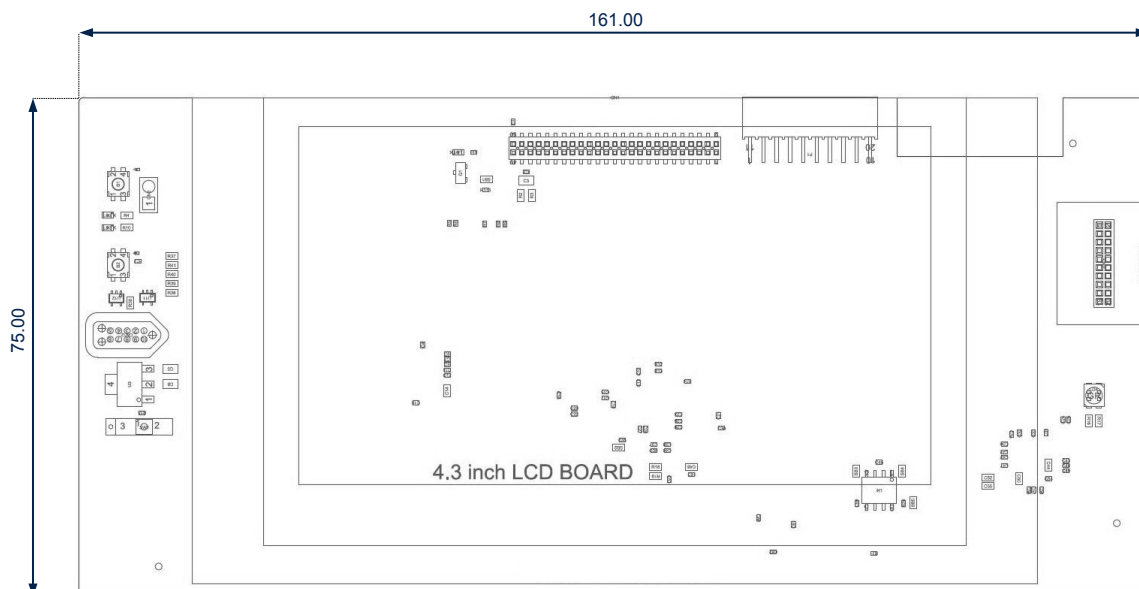

**Figure 7. STM32H7B3I-DK board mechanical dimensions (bottom view, in millimeters)**

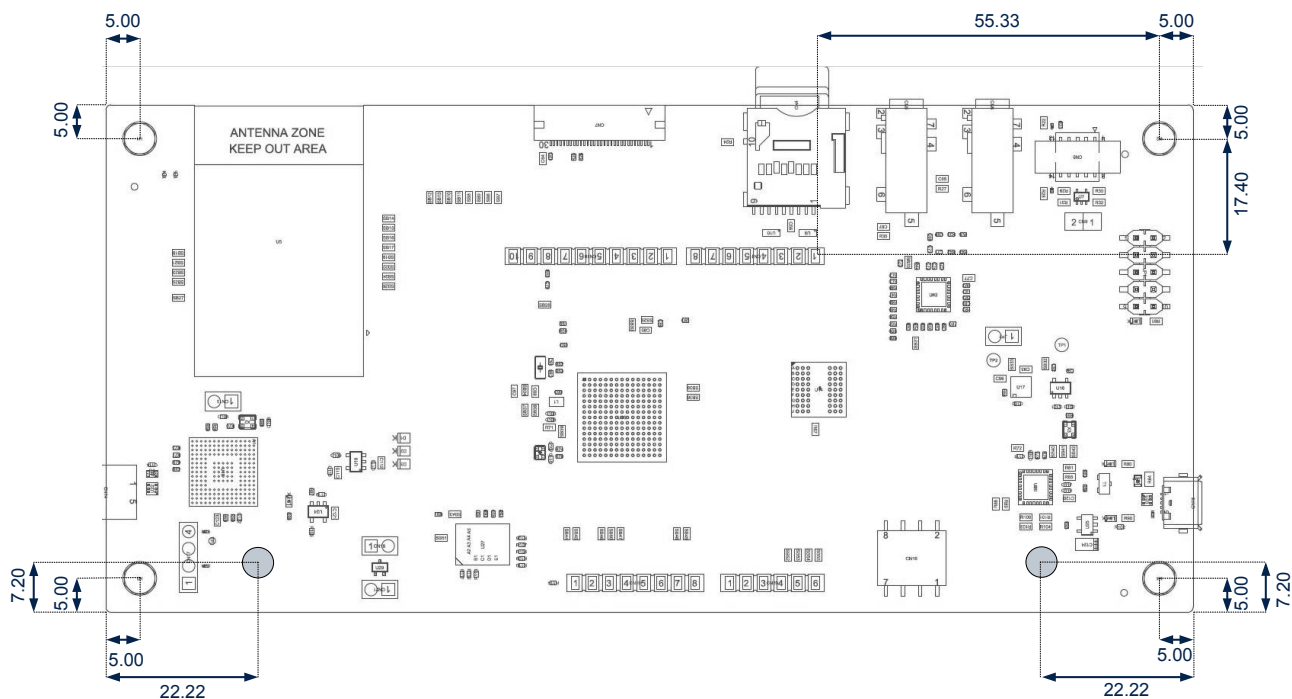

## 7.1 Embedded STLINK-V3E

### 7.1.1 Description

There are two different ways to program or debug the onboard STM32 MCU:

- Using the embedded STLINK-V3E
- Using an external debug tool connected to the MIP10 connector (CN8)

The facility for programming and debugging the STM32H7B3LIH6Q is integrated into the STM32H7B3I-DK board. The embedded STLINK-V3E supports only SWD and VCP for STM32 devices. For information about debugging and programming features, refer to the technical note *Overview of ST-LINK derivatives* (TN1235), which describes in detail all the STLINK-V3E features.

Features supported on STLINK-V3E:

- 5 V power supplied by USB connector (CN14)
- USB 2.0 high-speed-compatible interface
- JTAG Serial Wire Debug (SWD) specific features:
  - 3 to 3.6 V application voltage on the JTAG/SWD interface and 5 V tolerant inputs
  - JTAG
  - SWD and Serial Wire Viewer (SWV) communication
- STDC14 (MIP10) compatible connector (CN8)
- Status COM LED (LD4) which blinks during communication with the PC
- Fault red LED (LD7) alerting on USB overcurrent request
- 5 V/500 mA output power supply capability (U24) with current limitation and LED
- Green LED ON: 5 V enabled (LD5)


### 7.1.2 Drivers

Before connecting the STM32H7B3I-DK board to a Windows PC via USB, the user must install a driver for the STLINK-V3E (not required for Windows 10). It is available on the [www.st.com](http://www.st.com) website.

In case the STM32H7B3I-DK board is connected to the PC before the driver is installed, some STM32H7B3I-DK interfaces might be declared as *Unknown* in the PC device manager. In this case, the user must manually install the dedicated driver files, and update the driver of the connected device from the device manager as shown in Figure 8.

**Note:** Prefer using the USB Composite Device to handle a full recovery.

Figure 8. USB composite device

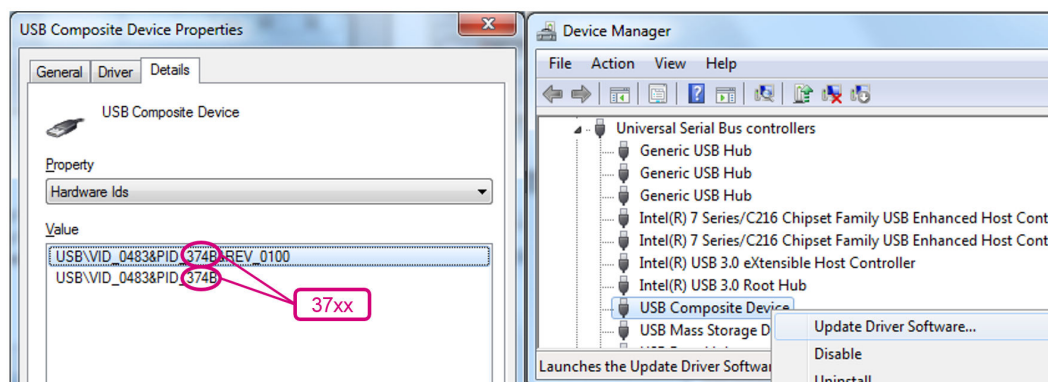

**Note:** 37xx:

- 374E for STLINK-V3E without bridge functions
- 374F for STLINK-V3E with bridge functions

### 7.1.3 STLINK-V3E firmware upgrade


The STLINK-V3E embeds a firmware upgrade mechanism for in-place upgrades through the USB port. The firmware might evolve during the lifetime of the STLINK-V3E product (for example new functionalities, bug fixes, support for new microcontroller families). So, it is recommended to visit the [www.st.com](http://www.st.com) website before starting to use the STM32H7B3I-DK Discovery kit and periodically, to stay up to date with the latest firmware version.

### 7.1.4 Using an external debug tool to program and debug the onboard STM32

There are two basic ways to support an external debug tool:

1. Keep the embedded STLINK-V3E running. First switch on STLINK-V3E until the COM LED lights up red. Then connect the external debug tool through the STDC14/MIPI10 debug connector (CN8).
2. Set the embedded STLINK-V3E in a High-impedance state. When setting the CN13 jumper (STLK\_RST) ON, the embedded STLINK-V3E is in the Reset state and all GPIOs are in high impedance. Then the users can connect their external debug tool to the debug connector (CN8).

**Figure 9. Connecting an external debug tool to program the onboard STM32H7B3LI**

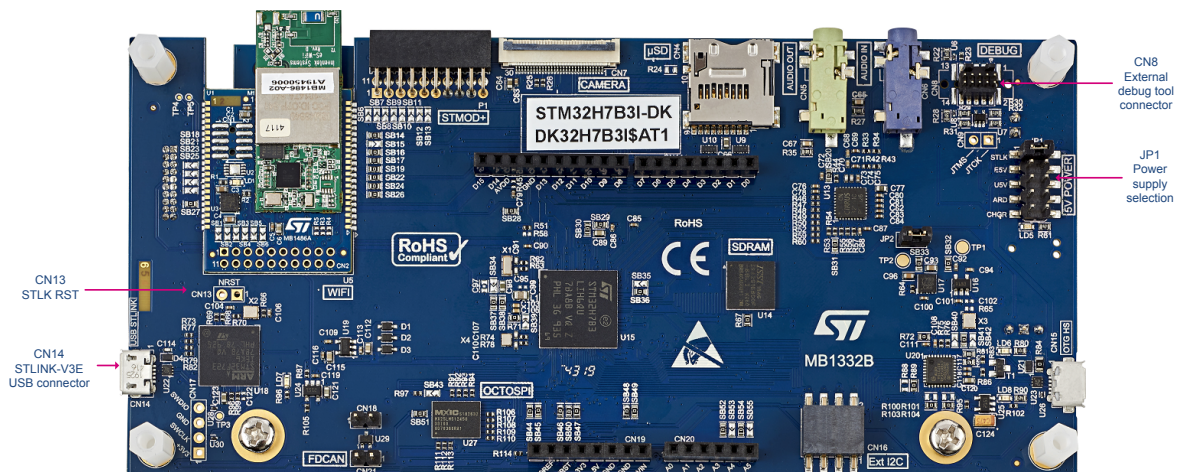

**Table 4. MIPI10 debug connector (CN8)**

MIPI10 pin	STDC14 pin	CN8	Designation
-	1	NC	Reserved
-	2	NC	Reserved
1	3	T_VCC	Target VCC
2	4	T_SWDIO	Target SWDIO using SWD protocol or target JTMS (T_JTMS) using JTAG protocol
3	5	GND	Ground
4	6	T_SWCLK	Target SWCLK using SWD protocol or target JCLK (T_JCLK) using JTAG protocol
5	7	GND	Ground
6	8	T_SWO	Target SWO using SWD protocol or target JTDO (T_JTMS) using JTAG protocol
7	9	T_JRCLK	Not used by SWD protocol, target JRCLK (T_JRCLK) using JTAG protocol, only for specific use
8	10	T_JTDI	Not used by SWD protocol, target JTDI (T_JTDI) using JTAG protocol, only for external tools
9	11	GNDDetect	GND detection as plug indicator, used on SWD and JTAG neither

MIPI10 pin	STDC14 pin	CN8	Designation
10	12	T_NRST	Target NRST using SWD protocol or target JTMS (T_JTMS) using JTAG protocol
-	13	T_VCP_RX	Target Rx used for VCP (must be bootloader-dedicated UART)
-	14	T_VCP_TX	Target Tx used for VCP (must be bootloader-dedicated UART)

## 7.2

### Power supply

A 5 V DC power source must power the STM32H7B3I-DK Discovery kit.

One of the following 5 V DC power inputs can be used, upon an appropriate board configuration:

- **A host PC is connected to CN14 through a USB Micro-B cable with enumeration (default setting)**
- An external charger connected to the CN14 connector through a USB Micro-B cable (without enumeration)
- An external 7-12 V power supply connected to CN19 pin 8 (ARDUINO®)
- A host PC is connected to the CN15 connector through a USB Micro-AB cable (5V\_USB\_HS)
- An external 5 V power supply connected to CN2 (E5V)

The green LED (LD5) turns ON when the voltage on the power line marked 5V is present. All supply lines required for operating the components on the STM32H7B3I-DK are derived from that 5V line.

**Note:** *The Discovery board must be powered by a power supply unit, or by auxiliary equipment complying with the standard EN 62368-1:2014+A11:2017. It must be a safety extralow voltage (SELV) with limited power capability.*

### 7.2.1

#### Supplying the board through STLINK-V3E USB connector 5 V/500 mA

The STLINK-V3E connector (CN14) can power the STM32H7B3I-DK Discovery kit, if the jumper JP1[1-2] is ON (STLK). This is the default setting.

If the USB enumeration succeeds, the 5V\_ST\_LINK power is enabled, by asserting the PWR\_ENn signal from STM32F723IEK6 "STLINK V3" (U18). This pin is connected to a power switch (U24), which powers the board. The power switch (U24) also features a current limitation to protect the PC in case of a short circuit on the board. If an overcurrent, higher than 500 mA, occurs onboard, the red LED (LD7) is lit.

The STM32H7B3I-DK board with its shield can be powered by the STLINK-V3E USB connector (CN14). Nevertheless, only the ST-LINK circuit gets power before USB enumeration because the host PC only provides 100 mA to the board at that time.

During the USB enumeration, the STM32H7B3I-DK board asks for 500 mA power to the host PC.

- If the host can provide the required power, the enumeration finishes with a *SetConfiguration* command. Then, the power switch is switched ON and the green LED (LD5) is turned ON, thus the STM32H7B3I-DK board with its shield can consume 500 mA current, but no more.
- If the host cannot provide the requested current, the enumeration fails. Therefore, the power switch (U24) remains OFF and the MCU part including the extension board is not powered. As a consequence, the green LED (LD5) remains turned OFF. In this case, it is mandatory to use an external power supply.

### 7.2.2 Supplying the STM32H7B3I-DK using the external power supply input from VIN (7 to 12 V, 800 mA max)

The STM32H7B3I-DK board might require more than 500 mA of supply current. In such a case, the board can be supplied through pin8 (marked VIN on the board) of the CN19 ARDUINO® connector.

Note that using STLINK-V3E for debugging when powering the board with an external power supply, it is important to power the board before connecting the host PC to CN14, which requires the following sequence to be respected:

1. Set the jumper JP1[7-8] ON (ARD).
2. Connect the external power source to CN19 pin 8.
3. Check that the green LED (LD5) is turned ON.
4. Connect the host PC to the USB connector (CN14).

If this order is not respected, VBUS from ST-LINK might power the board first and the following risks might be encountered:

1. If the board needs more than 500 mA current, the PC might be damaged or limit the current. As a consequence, the board is not powered correctly.
2. The enumeration step requests 500 mA. There is a risk that the request is rejected. Then the enumeration does not succeed if the PC cannot provide such a current.

**Table 5. External power sources: VIN (7 to 12 V)**

Input power name	Connector pins	Voltage range	Maximum current	Limitation
VIN	CN19 pin 8	7 to 12 V	800 mA	From 7 V to 12 V only and input current capability is linked to input voltage: <ul style="list-style-type: none"> <li>• 800 mA input current when VIN = 7 V</li> <li>• 450 mA input current when 7 V &lt; VIN &lt; 9 V</li> <li>• 250 mA input current when 9 V &lt; VIN &lt; 12 V</li> </ul>

### 7.2.3 Supplying STM32H7B3I-DK using a USB charger (5 V)

When the STM32H7B3I-DK board is power supplied by a USB charger through CN14 (refer to Table 6), the jumper JP1[9-10] must be ON (CHGR).

**Table 6. External power source: CHGR (5 V)**

Input power name	Connector pins	Voltage range	Maximum current
CHGR	CN14	5 V	-

### 7.2.4 Supplying STM32H7B3I-DK using USB OTG HS connector (5 V/500 mA)

When the STM32H7B3I-DK board is power supplied by the host PC through the CN15 USB OTG HS connector (see Table 7), the jumper JP1[5-6] must be ON (U5V).


**Table 7. External power source: U5V (5 V)**

Input power name	Connector pins	Voltage range	Maximum current
U5V	CN15	5 V	-



## 7.2.5 MCU power supply–SMPS/LDO configuration

Figure 10. MCU power: SMPS/LDO

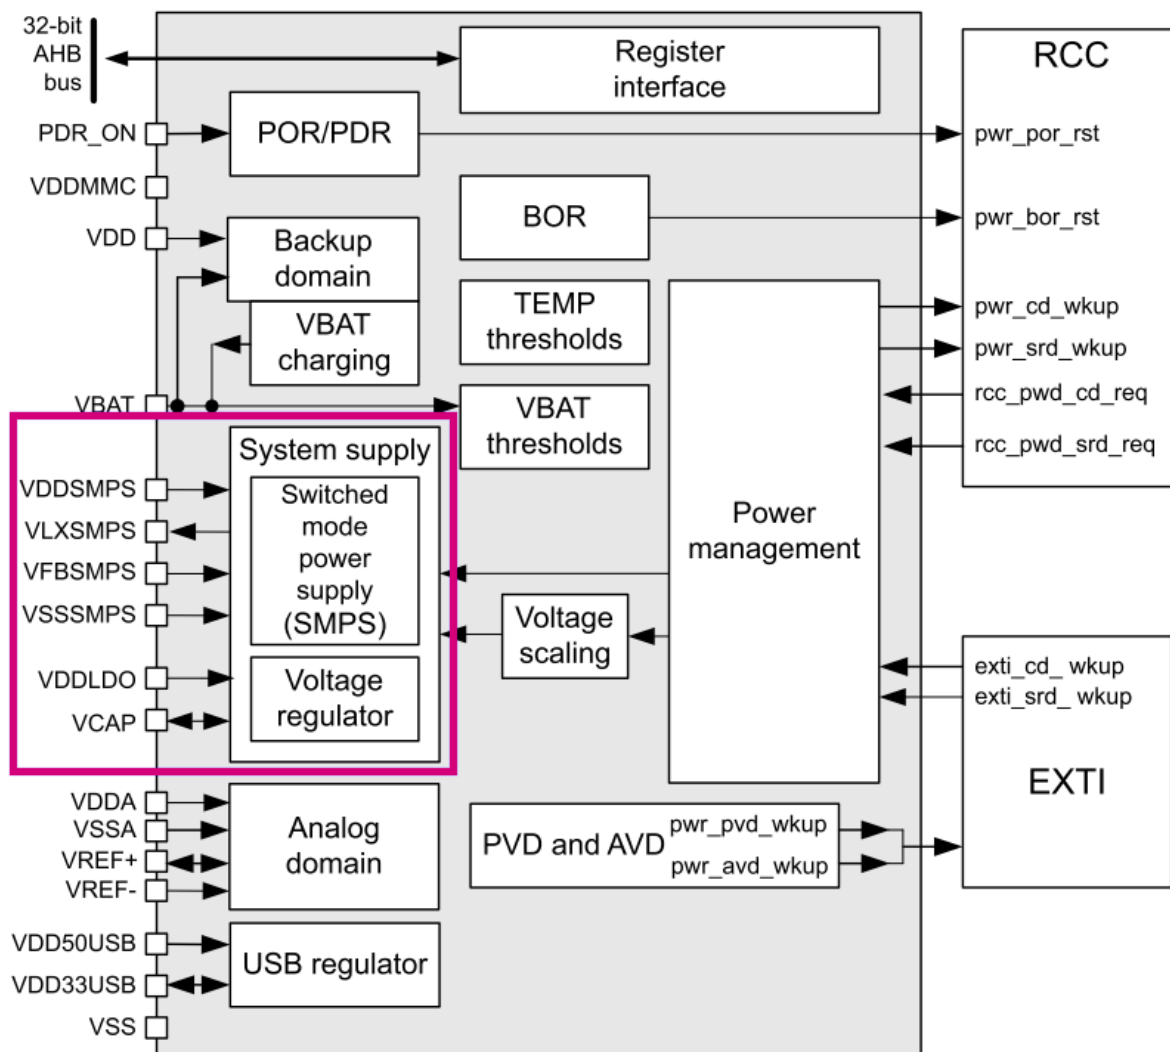

The STM32H7B3I-DK board supports four “SMPS/LDO” configurations of the STM32H7B3LIH6Q microcontroller, given in the figures below.

Figure 11. Config1 - LDO only

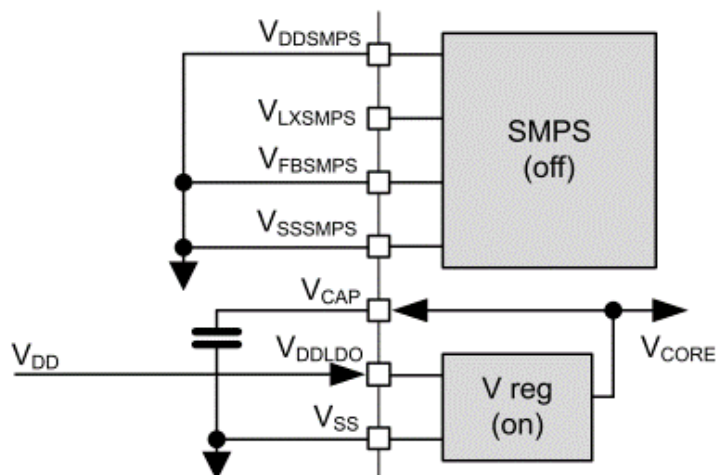


Figure 12. Config2 - SMPS only (default)

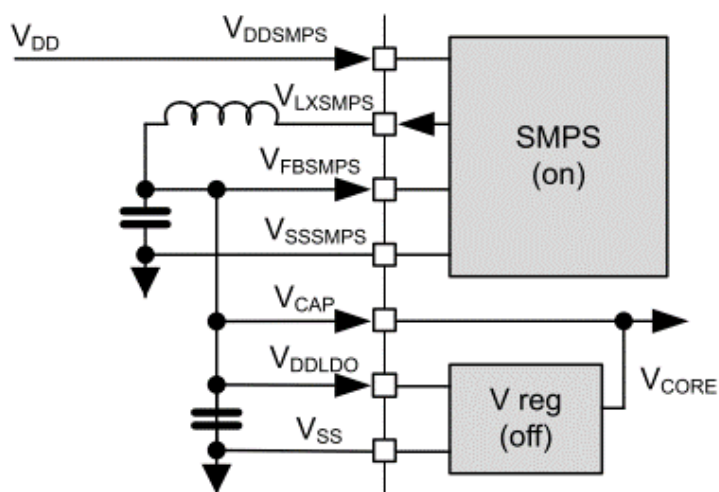




Figure 13. Config3 - SMPS and LDO cascaded


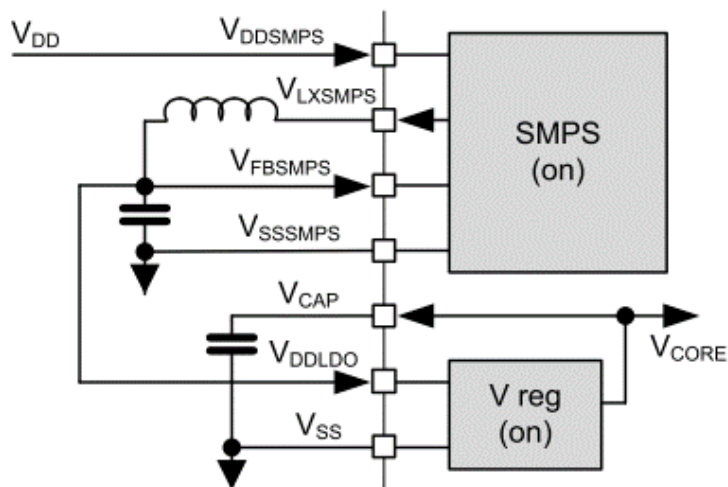


Figure 14. Config4-External SMPS

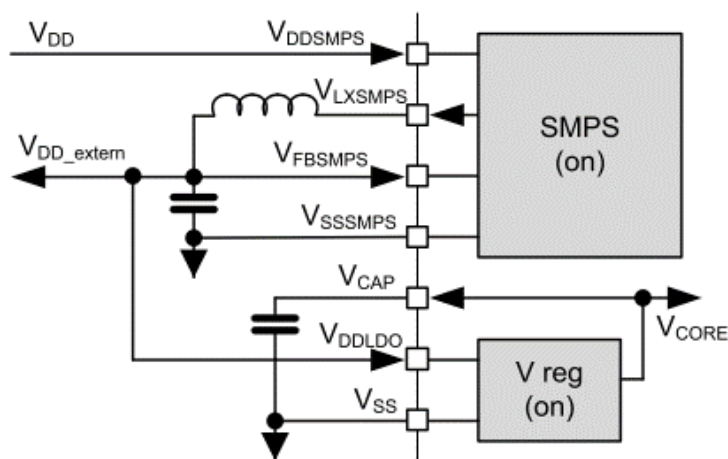

To change the power supply configuration, some reworks are needed on the STM32H7B3I-DK board as detailed in the table below.

Table 8. Internal SMPS/LDO and board configuration

HW	Config1 SMPS OFF LDO ON	Config2 SMPS ON LDO OFF (Default config)	Config3 (SMPS and LDO cascaded) SMPS ON LDO ON	Config4 (External SMPS) SMPS ON LDO ON
SB2	ON	-	-	-
R14	ON	-	-	-
SB39	ON	-	-	-
R71	ON	ON	ON	ON

HW	Config1 SMPS OFF LDO ON	Config2 SMPS ON LDO OFF (Default config)	Config3 (SMPS and LDO cascaded) SMPS ON LDO ON	Config4 (External SMPS) SMPS ON LDO ON
SB37	-	ON	ON	ON
SB38	-	ON	-	-
C15	2.2 uF	100 nF	2.2 uF	2.2 uF
C27	2.2 uF	100 nF	2.2 uF	2.2 uF
R13	-	ON	-	-
R12	-	-	ON	ON
SB34	-	-	-	ON
C97	-	-	-	ON

**Warning:** Board SMPS/LDO firmware power configuration must match with the hardware configuration.

If not, you face a deadlock: after the reset, STLINK cannot connect to the target anymore.

The firmware PWR configuration corresponds with the following in the main.c:

In the function SystemClock\_Config:

- In the case of "Direct SMPS" hardware configuration (default):

```
HAL_PWREx_ConfigSupply(PWR_DIRECT_SMPS_SUPPLY);
```

- In the case of "LDO" hardware configuration:

```
HAL_PWREx_ConfigSupply(PWR_LDO_SUPPLY);
```

If a deadlock is faced due to a mismatch between the hardware board setting and the firmware setting (LDO/SMPS), the user can recover the board by doing the following:

- Power down the board.
- Change the SW1 switch position to 1.
- This changes the BOOT0 pin to 1 instead of 0. Thus, the device boot address is changed to boot address 1 making the bootloader start in system memory, instead of starting the firmware in the user flash (firmware that is setting a wrong LDO/SMPS configuration).
- Power on the board, and connect using STM32CubeProgrammer.
- Erase the user flash.
- Power off the board and put back the switch SW1 to position 0.
- The board is now recovered and can proceed normally.

## 7.3 Measurement of MCU current consumption

The JP2 jumper allows direct measurement of the STM32H7B3LIH6Q current consumption by removing the jumper and replacing it with an external ammeter. If there is no ammeter, the STM32H7B3LIH6Q is not powered.

## 7.4 Clock source

Three clock sources are available on the STM32H7B3I-DK board:

- 32.768 kHz crystal X1, for the STM32H7B3LIH6Q embedded RTC
- 24 MHz crystal X4, for the STM32H7B3LIH6Q system clock
- 25 MHz oscillator X2 for the STLINK-V3E

**Note:** By default, the 24MHz clock of the camera and USB PHY is provided by the MCO1 clock signal.

## 7.5 Reset sources

The general reset of the STM32H7B3I-DK Discovery kit is active LOW. Sources of reset are:

- Reset button (B1)
- Embedded STLINK-V3E
- ARDUINO® Uno shield board through CN19 connector, pin 3
- MIPI10 and TAG connectors (reset from the debugging tool)

The general reset is connected to the following peripheral reset functions:

- STM32H7B3LIH6Q MCU reset
- Octo-SPI flash memory reset
- Camera reset
- LCD reset
- Wi-Fi® module reset (optional)

## 7.6 Board functions

### 7.6.1 TFT color LCD 480x272 pixels

The STM32H7B3I-DK board includes a 4.3-inch LCD touchscreen board, which is connected to the RGB interface of the STM32H7B3LIH6Q through the CN1 50-pin connector. The MB1315 LCD daughterboard uses the TFT LCD with a driving system, a white LED backlight, and a capacitive touch panel. The touchscreen controller interfaces with the STM32H7B3LIH6Q via the bidirectional I2C4 bus, since the NRST general reset controls the TFT LCD reset. An external SDRAM (U14) is also used to store display data.

### 7.6.2 USB OTG HS

The STM32H7B3I-DK board supports USB OTG high-speed communication via a USB Micro-AB connector (CN15) and a high-speed USB 2.0 external PHY (U20). A USB power switch (U25) is also connected to V<sub>BUS</sub> and provides power to CN15. The green LED (LD6) is lit in one of these cases:

- The power switch is ON and the STM32H7B3I-DK board works as a USB host
- V<sub>BUS</sub> is powered by another USB host when the STM32H7B3I-DK board works as a USB device.

The red LED (LD8) is lit when an overcurrent occurs (higher than 500 mA).

**Note:** *The STM32H7B3I-DK board can be powered by the CN15 USB connector at 5 V DC with a 500 mA current limitation.*

### 7.6.3 EXT\_I2C

An EXT\_I2C connector socket is available on the STM32H7B3I-DK board, allowing external modules to be connected via the I2C4 bus. An I/O signal from the STM32H7B3LIH6Q MCU manages EXT\_RESET.

### 7.6.4 microSD™ card

A CN4 slot for microSD™ card (SD 2.0 compliant) is available on the STM32H7B3I-DK board and is connected to the SDIO1 interface of the STM32H7B3LIH6Q. The uSD\_Detect signal manages the microSD™ card detection. When a microSD™ card is inserted in the slot, the uSD\_Detect signal level is LOW, otherwise, it is HIGH.

#### Limitations:

On the STM32H7B3I-DK board, some SDIO1 signals are shared with some digital camera interface DCMI signals. As a consequence, the user must pay attention that no camera is connected to CN7 when using the microSD™ card.

### 7.6.5 Audio

An audio codec is connected to either the I2S6 or SAI1 interface of STM32H7B3LIH6Q to support the TDM feature. **The I2S6 interface is used by default.**

This feature can implement audio recording on an analog microphone and audio playback of a different audio stream on headphones and line output at the same time.

The audio codec communicates with STM32H7B3LIH6Q via the I2C4 bus, which is shared with the camera module, the TFT LCD, the ARDUINO® Uno connectors, the STMod+ connector, and the Wi-Fi® module. The I<sup>2</sup>C-bus addresses of the audio codec are 0x95 and 0x94.

Several audio connections are available on the STM32H7B3I-DK board:

- An analog microphone input, which is connected to the ADC of the audio codec through the blue audio jack CN6
- An external speaker, which can be connected to the audio codec via the green audio jack (CN5)
- A CN3 connector is used to connect a microphone module comprising up to five MEMS microphones. They are connected to the digital input microphones of STM32H7B3LIH6Q and managed by the DFSDM interface.

**Note:** When using the I2S6 interface, make sure that SB46 (I2S6\_MCK) and SB31 (I2S6\_WS) are ON.

### 7.6.6 CAN FD

The STM32H7B3I-DK board supports one channel of CAN FD (flexible data rate CAN) compliant bus based on the 3V3 CAN transceiver.

The standby signal on the CAN-FD transceiver is controlled by the PH8 GPIO of STM32H7B3LIH6Q.

#### Limitations:

The CAN-FD signals are shared with STMod+ signals. As a consequence, the user must take care that nothing is connected to the STMod+ connector (one or four pins), or both SB7 and SB12 must be OFF when the FD-CAN1 bus is activated.

**Table 9. FD-CAN1–Solder bridge configuration**

Solder bridge	Setting <sup>(1)</sup>	Configuration
SB3, SB4, SB5	SB3, SB4, SB5 ON	TXD, RXD, and STBY of MCD2562FD are connected to PA11 (FDCAN1_RX), PA12 (FDCAN1_TX), and PH8 (GPIO) of STM32H7B3LIH6Q MCU.
	<b>SB3, SB4, SB5 OFF</b>	<b>FDCAN1 bus not connected: TXD, RXD, and STBY of MCD2562FD are not connected to PA11 (FDCAN1_RX), PA12 (FDCAN1_TX), and PH8 (GPIO) of STM32H7B3LIH6Q MCU.</b>

1. The default configuration is shown in bold.

### 7.6.7 Octo-SPI NOR flash memory

The STM32H7B3I-DK board includes a 512-Mbit Octo-SPI NOR flash memory device, which is connected to the OCTOSPI1 interface of the STM32H7B3LIH6Q microcontroller. The Octo-SPI NOR flash memory device operates in a single transfer rate (STR) or a double transfer rate (DTR) mode. The RESETn of the flash memory is connected to the general reset (NRST) of the STM32H7B3I-DK Discovery kit.

### 7.6.8 SDRAM

The STM32H7B3I-DK board adds an external 128-Mbit SDRAM, which is connected to the STM32H7B3LIH6Q flexible memory controller FMC interface.

### 7.6.9 Virtual COM port

The serial interface USART1 (PA9/PA10), which supports the bootloader, is directly available as a Virtual COM port of a PC connected to the STLINK-V3E USB connector (CN14). The VCP configuration is the following:

- 115200 bit/s
- 8-bit data
- No parity
- 1 stop bit
- No flow control

### 7.6.10 TAG

A CN12 TAG interface footprint is reserved on the STM32H7B3I-DK board, which can be used to debug and program the board.

### 7.6.11 Buttons and LEDs

The black button B1 located on the top side is the reset of the STM32H7B3LIH6Q microcontroller.

The blue button (B2) located on the top side can be used as a digital input or as a wake-up-alternate function.

When the button is depressed the logic state is LOW, otherwise, the logic state is HIGH.

Two LEDs located on the top side, blue LD2 and red LD3, are available for the user. To light a LED, a logic state HIGH must be written in the corresponding GPIO register. Table 10 shows the assignment of the control ports to the LED indicators.

**Table 10. Button and LED control port**

Reference	Color	Name	Comment
B1	Black	Reset	-
B2	Blue	Wake-up	Wake-up alternate function
LD1	Green	LED1	PA12 alternate function with ARD D13
LD2	Blue	LED2	PG2 user LED2
LD3	Red	LED3	PG11 user LED1
LD4	Bicolor red and green	ST-LINK COM	Green during communication
LD5	Green	5 V power	5 V available
LD6	Green	VBUSOK	USB 5 V available
LD7	Red	Power fault	Current higher than 550 mA
LD8	Red	VBUS OCCR	PH12

## 7.6.12

### Wi-Fi® RF module

A Wi-Fi® module Inventek ISM43340-M4G-L44-10CF (802.11 b/g/n compliant) is supported on the STM32H7B3I-DK board. This module is an embedded (eS-WiFi) wireless Internet connectivity device and consists of an Arm® Cortex®-M4 STM32 host processor, an integrated antenna (or optional external antenna), and a Cypress Wi-Fi® device. The module uses the SPI interface, as the corresponding firmware (for SPI capability only) is downloaded on the ISM43340-M4GL44-10CF Wi-Fi® module. The Wi-Fi® module requires no operating system and has a completely integrated TCP/IP stack that only requires AT commands to establish connectivity for a wireless product. The main features of the Inventek ISM43340- M4G-L44-10CF module are:

- Based on CYW43340 Cypress Leading Edge Radio Device
- Includes STM32F405 ST Arm® Cortex®-M4 microcontroller
- Hardware supported by Cypress WICED SDK 3.5.2 or later
- IEEE 802.11b (DSSS 11 Mbit/s)
- IEEE 802.11g (OFDM 54 Mbit/s)
- IEEE 802.11n (OFDM 72.2 Mbit/s - single stream w/20 MHz, Short GI)
- IEEE 802.11i (security)
  - WPA-PSK/TKIP (Wi-Fi protected access)
  - WPA2-PSK (Wi-Fi protected access 2)
- 5 GPIOs for SPI or ADC (SPI uses ADC pins)
- Low-power operation with built-in power modes
- EMI/EMC metal shield for best RF performance in noisy environments and to accommodate for lower RF emissions/signature for easier FCC compliance
- FCC/IC/CE compliance certification

**Figure 15. Wi-Fi® module top view**

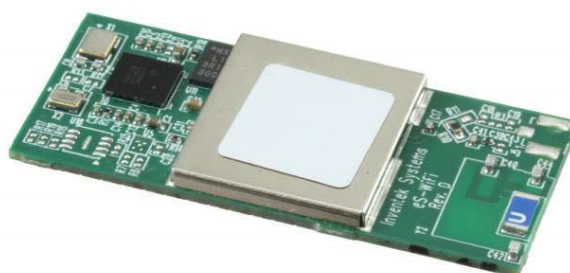


Table 11. Wi-Fi® solder bridge configuration

Solder bridge	Setting <sup>(1)</sup>	Description
SB18, SB21, SB23, SB25 SB19, SB22, SB24, SB26	ON	UART2 connected to the Wi-Fi® module
	OFF	SPI2 disconnected from the Wi-Fi® module
	<b>OFF</b>	<b>UART2 disconnected from the Wi-Fi® module</b>
	<b>ON</b>	<b>SPI2 connected to the Wi-Fi® module</b>
SB14	<b>ON</b>	<b>WIFI_WKUP signal connected to PI2 of STM32H7B3LIH6Q</b>
	OFF	WIFI_WKUP signal not connected to PI2 of STM32H7B3LIH6Q
SB17	<b>ON</b>	<b>WIFI_GPIO signal connected to PI4 of STM32H7B3LIH6Q</b>
	OFF	WIFI_GPIO signal not connected to PI4 of STM32H7B3LIH6Q
SB15, SB16	<b>OFF, ON</b>	<b>WIFI reset controlled by WIFI_RST (GPIO) –PI1 of STM32H7B3LIH6Q</b>
	ON, OFF	WIFI reset controlled by system NRST
SB27	<b>ON</b>	<b>WIFI_DATRDY signal connected to PI5 of STM32H7B3LIH6Q</b>
	OFF	WIFI_DATRDY signal not connected to PI5 of STM32H7B3LIH6Q

1. The default configuration is shown in bold.

#### Note:

In STM32H7B3I-DK boards labeled A1945xxxx, the ISM43340-M4G-L44-10CF is loaded with the C3.5.2.6.STM.BETA4 version, which allows a network scan only once.

A new C3.5.2.6.STM version of the ISM43340-M4G-L44-10CF firmware fixing this limitation is available on the <https://www.inventeksys.com/iwin/firmware> website.

To upgrade the ISM43340-M4G-L44-10CF firmware version, proceed as follows:

1. Remove R30 and R32. Connect a wire between the R30 right side (SWDIO) and TP4 (JTMS/SWDIO).
2. Connect a wire between the R32 right side (SWCLK) and TP5 (JTCK/SWCLK).
3. Then use the embedded STLINK-V3E to flash the Inventek module.

## 8 Board connectors


Sixteen connectors are implemented on the STM32H7B3I-DK board.

- STLINK-V3E USB Micro-B (CN14)
- USB OTG HS Micro-AB (CN15)
- microSD™ (CN4)
- STMod+ (P1)
- Camera (CN7)
- TAG (CN12)
- External I<sup>2</sup>C (CN16)
- Audio extension board (DFSDM) (CN3)
- STDC14/MIP110 (CN8)
- ARDUINO® Uno V3 (CN10, CN11, CN19, and CN20)
- LCD (CN1)
- Audio jacks (CN5 and CN6)

### 8.1 STLINK-V3E USB Micro-B connector (CN14)

The USB connector (CN14) is used to connect the embedded STLINK-V3E to the PC for programming and debugging purposes.

**Figure 16. Micro-B connector (CN14) front view**

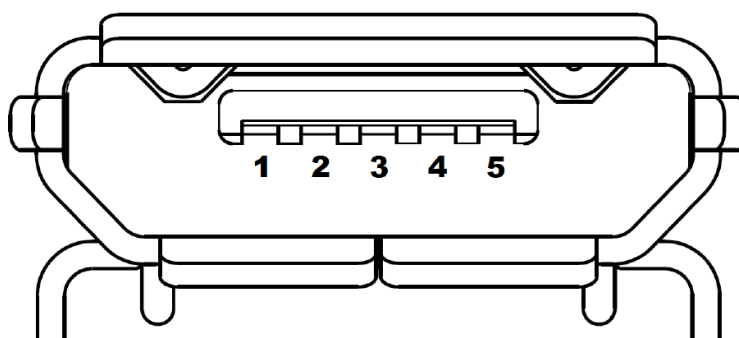

The related pinout for the USB ST-LINK connector is listed in [Table 12](#).

**Table 12. USB Micro-B connector (CN14) pinout**


Connect or	Pin number	Pin name	Signal name	ST-LINK MCU pin	Function
CN14	1	VBUS	5V_USB_CHARGER	-	5 V power
	2	DM	USB_DEV_HS_CN_N	PB14	USB differential pair M
	3	DP	USB_DEV_HS_CN_P	PB15	USB differential pair P
	4	ID	-	-	-
	5	GND	-	-	GND



## 8.2 USB OTG HS Micro-AB connector (CN15)

A USB OTG high-speed communication link is available at the USB Micro-AB receptacle connector (CN15). The Micro-AB receptacle enables USB Host and USB Device features.

**Figure 17. USB OTG HS Micro-AB connector (CN15) front view**

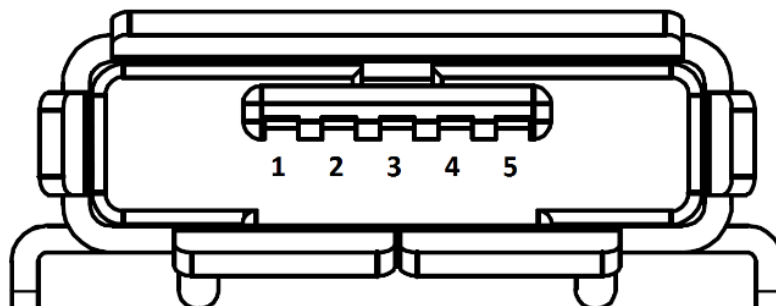

The related pinout for the USB OTG HS connector is listed in [Table 13](#).


**Table 13. USB OTG HS Micro-AB connector (CN15) pinout**

Connect or	Pin number	Pin name	Signal name	USB3320C-EZK pin	Function
CN15	1	VBUS	5V_USB_HS	22	5 V power
	2	DM	USB_HS_N	19	Data-
	3	DP	USB_HS_P	18	Data+
	4	ID	-	23	ID
	5	GND	-	-	GND

### 8.3 microSD™ card connector (CN4)

microSD™ cards with 4 GB or more capacity can be inserted in the card receptacle (CN4). Four data bits of the SDIO1 interface, CLK, and CMD signals of the STM32H7B3LIH6Q are used to communicate with the microSD™ card. The  $\mu$ SD\_Detect signal detects the card insertion. When a microSD™ card is inserted, the  $\mu$ SD\_Detect level is LOW, otherwise, it is HIGH.

**Figure 18. microSD™ card connector (CN4)**

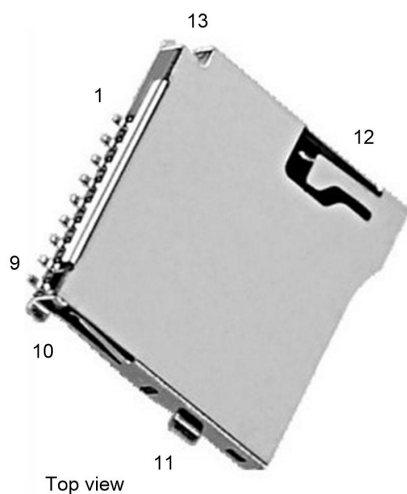

**Table 14. microSD™ connector (CN4) pinout**


Pin number	Description	Pin number	Description
1	SDIO1_D2 (PC10)	6-9	GND
2	SDIO1_D3 (PC11)	7	SDIO1_D0 (PC8)
3	SDIO1_CMD (PD2)	8	SDIO1_D1 (PC9)
4	VDD (3V3)	10	$\mu$ SD_Detect (PI8)
5	SDIO1_CK (PC12)	11-12-13-14	GND (casing)

## 8.4 STMod+ connector (P1)

The standard 20-pin STMod+ connector is available on the STM32H7B3I-DK board to increase compatibility with external boards and modules from the ecosystem of microcontrollers. By default, it is designed to support an ST-dedicated fanout board to connect different modules or board extensions from different manufacturers. The fanout board also embeds a 3.3 V regulator and I<sup>2</sup>C level shifters. For more detailed information on the fanout board, refer to the user manual *STMod+ fan-out expansion board for STM32 Discovery kits and Evaluation boards* (UM2695).

For details about the STMod+ interface, refer to the technical note *STMod+ interface specification* (TN1238).

**Figure 19. STMod+ connector (P1)**

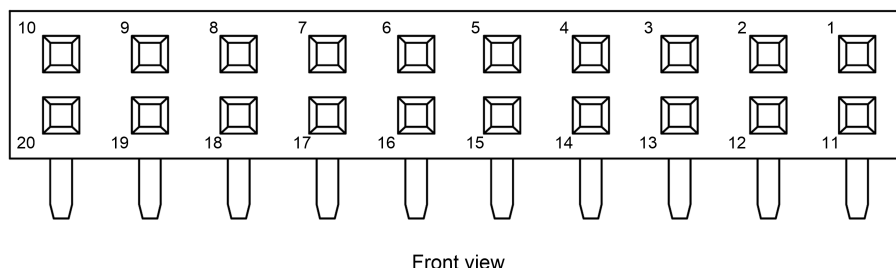

**Table 15. STMod+ connector (P1) pinout**

Pin number	Description	Pin number	Description
1	SPI2_NSS/USART2_CTS (PA11/PA0)	11	INT (PC6)
2	SPI2_MOSI/USART2_TX (PC3/PD5)	12	RESET (PH8)
3	SPI2_MISO/USART2_RX (PC2/PD6)	13	ADC (PA4)
4	SPI2_SCK/USART2_RTS (PA12/PD4)	14	PWM (PF8)
5	GND	15	5 V
6	5 V	16	GND
7	I2C4_SCL (PD12)	17	DFSDM-DATA3 (PC7)
8	SPI2_MOSIs (PB15)	18	DFSDM-CKOUT (PD3)
9	SPI2_MISOs (PB14)	19	DFSDM-DATA7 (PB9)
10	I2C4_SDA (PD13)	20	DFSDM-CK7 (PB8)

**Note:** This connector shares many GPIOs with other functions on the different boards. For more detailed information, refer to [Section 9: STM32H7B3I-DK I/O assignment](#). Also, to have a quick look at STMod+ GPIO sharing and multiplexing, and to get a quick view of other alternate functions available on its pins, refer to [Section 10: STMod+ GPIO sharing and multiplexing](#).

## 8.5 Camera module connector (CN7)

On the STM32H7B3I-DK board, a 30-pin connector (CN7) with digital camera interface DCMI signals is available to connect an 8-bit camera module such as the STM32F4DIS-CAM module. This module must be connected with caution before powering the STM32H7B3I-DK board.

*Note:* The camera clock is the MCO clock by default. The I<sup>2</sup>C address for the STM32F4DIS-CAM camera module is 60h and 61h.


### Limitations:

Care must be taken of GPIO sharing and multiplexing with other functions, to program the good configuration. GPIO assignment and sharing are precise below:

- DCMI\_SDA and DCMI\_SCL I<sup>2</sup>C peripherals are shared with the STMod+ and ARDUINO® connectors, audio codec, and TFT LCD.
- The PA4, PB8, PB9, PC6, PC7, and PD3 camera signals are shared with the STMod+ connector.
- The PC9 and PC11 camera signals are shared with SDIO1\_D1 and SDIO1\_D3 signals
- DCMI\_HSYNC camera signal (PA4) is shared with the ARDUINO® ARD\_A0 signal.

As a consequence, when using the camera, the user must pay attention that there is nothing connected to the STMod+ connector. And SB44 must be OFF. Same, when using the camera, the microSD™ cannot be used. At least, the user must take care that the SB45 is OFF (ARD\_A0 signal disconnected to PA4).

**Figure 20. Camera module connector (CN7)**

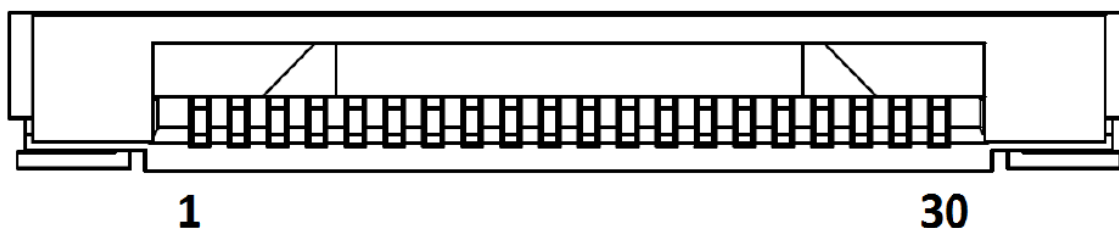


**Table 16. Camera module connector (CN7) pinout**

Pin number	Description	Pin number	Description
1	GND	16	GND
2	NC	17	DCMI_HSYNC (PA4)
3	NC	18	NC
4	DCMI_D0 (PC6)	19	DCMI_VSYNC (PB7)
5	DCMI_D1 (PC7)	20	VDD (3V3)
6	DCMI_D2 (PG10)	21	CAMERA_CLK (MCO1) (PA8)
7	DCMI_D3 (PC9)	22	NC
8	DCMI_D4 (PC11)	23	GND
9	DCMI_D5 (PD3)	24	NC
10	DCMI_D6 (PB8)	25	DCMI_PWR_EN (PA7)
11	DCMI_D7 (PB9)	26	DCMI_NRST (NRST from MCU)
12	NC	27	I2C4_SDA (PD13)
13	NC	28	I2C4_SCL (PD12)
14	GND	29	GND
15	DCMI_PIXCLK (PA6)	30	VDD (3V3)

## 8.6 TAG connector (CN12)

The TAG connector footprint (CN12) is used to connect the STM32H7B3LIH6Q microcontroller for programming or debugging the board.

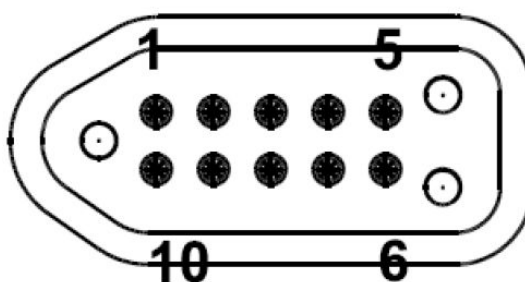
**Figure 21. TAG connector (CN12)**

**Table 17. TAG connector (CN12) pinout**

Pin number	Description	Pin number	Description
1	VDD (3V3)	10	NRST (PH3)
2	SWDIO/JTMS (PA13)	9	NJTRST (PB4)
3	GND	8	JTDI (PA15)
4	SWCLK/JTCK (PA14)	7	NC
5	GND	6	SWO/JTDO (PB3)

## 8.7 EXT\_I2C connector (CN16)

The EXT\_I2C connector socket is used to connect external modules to the I2C4 interface or to monitor the I2C4 interface.

**Figure 22. EXT\_I2C connector (CN16)**



**Table 18. EXT\_I2C connector (CN16) pinout**

Pin number	Description	Pin number	Description
1	NC	5	EXT_RESET (PB6)
2	GND	6	I2C4_SCL (PD12)
3	NC	7	NC
4	VDD (3V3)	8	I2C4_SDA (PD13)

As I2C4 is available for external use, it is important to note that the following I2C4 addresses are already used onboard:

**Table 19. I2C4 onboard addresses**

Application	W/R I <sup>2</sup> C address	I <sup>2</sup> C maximum speed	Comment
TFT LCD touch panel	0x71 and 0x70	400 kHz	Default I <sup>2</sup> C address
Audio codec	0x95 and 0x94	100 kHz	-
Camera	0x61 and 0x60	400 kHz	For the STM32F4DIS-CAM module

## 8.8 Audio connector (CN3)

The 2x10-male-pin 1.27 mm-pitch audio connector is used for the audio MEMS daughter extension using the DFSDM interface. The reference to use is the MB1299 MEMS microphone daughterboard. The MB1299 embeds five digital MEMS microphones.


### Limitations:

On the STM32H7B3I-DK board, some DFSDM signals are shared with STMod+ signals. As a consequence, the user must make sure that nothing is connected to the P1 STMod+ connector (pins 17 and 19).

**Table 20. DFSDM solder bridge configuration**

Solder bridge	Setting <sup>(1)</sup>	Configuration
SB48, SB50	<b>SB48, SB50 ON</b>	<b>DFSDM1_2_DATIN1 and DFSDM1_2_CKOUT are connected to PB12 and PB0 of the STM32H7B3LIH6Q MCU.</b>
	SB48, SB50 OFF	DFSDM interface not connected: DFSDM1_2_DATIN1 and DFSDM1_2_CKOUT are not connected to PB12 and PB0 of the STM32H7B3LIH6Q MCU.

1. The default configuration is shown in bold.


**Figure 23. Audio connector (CN3)**

**Table 21. Audio connector (CN3) pinout**

Pin number	Function/MCU port	Pin number	Function/MCU port
1	GND	2	3V3
3	DFSDM1_2_CKOUT (PB0)	4	DFSDM1_2_CKOUT (PB0)
5	DFSDM1_DATIN7 (PB9)	6	DFSDM1_2_DATIN1 (PB12)
7	DFSDM1_DATIN3 (PC7)	8	NC
9	NC	10	DETECTn (PI6)
11	NC	12	MEMS_LED (PH15)
13	NC	14	NC
15	NC	16	NC
17	NC	18	NC
19	3V3	20	GND

## 8.9 TFT LCD connector (CN1)

The CN1 connector is designed to connect the 4.3-inch TFT LCD touchscreen board. Table 22 shows the assignment of CN1 and STM32H7B3LIH6Q terminals.

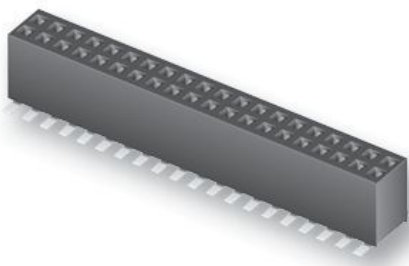**Figure 24. TFT LCD connector (CN1)**



**Table 22. TFT LCD connector (CN1)**

MCU port	Signal name	CN1 pin number		Signal name	MCU port
-	GND	1	2	GND	-
PI15	LCD_R0	3	4	LCD_G0	PJ7
PJ0	LCD_R1	5	6	LCD_G1	PJ8
PJ1	LCD_R2	7	8	LCD_G2	PJ9
PJ2	LCD_R3	9	10	LCD_G3	PJ10
PJ3	LCD_R4	11	12	LCD_G4	PJ11
PJ4	LCD_R5	13	14	LCD_G5	PK0
PJ5	LCD_R6	15	16	LCD_G6	PK1
PJ6	LCD_R7	17	18	LCD_G7	PK2
-	GND	19	20	GND	-
PJ12	LCD_B0	21	22	LCD_DE	PK7
PJ13	LCD_B1	23	24	LCD_ON/OFF	PA2
PJ14	LCD_B2	25	26	LCD_HSYNC	PI12
PJ15	LCD_B3	27	28	LCD_VSYNC	PI13
PK3	LCD_B4	29	30	GND	-
PK4	LCD_B5	31	32	LCD_CLK	PI14
PK5	LCD_B6	33	34	GND	-
PK6	LCD_B7	35	36	NRST	NRST
-	GND	37	38	I2C4_SDA	PD13
PH2	LCD_INT	39	40	I2C1_SCL	PD12
-	NC	41	42	NC	-
PA1	LCD_BL_CTRL	43	44	NC	PB6
-	5V	45	46	NC	-
-	GND	47	48	NC	-
-	GND	49	50	3V3	-



## 8.10 ARDUINO® Uno V3 connectors (CN10, CN11, CN19, and CN20)

The ARDUINO® Uno V3 connectors (CN10, CN11, CN19, and CN20) are female connectors compatible with ARDUINO® Uno V3 standard. Most of the shields designed for ARDUINO® Uno V3 fit the STM32H7B3I-DK board.

**Table 23. ARDUINO® Uno V3 compatible connectors pinout**

Left connectors					Right connectors				
CN number	Pin number	Pin name	MCU pin	Function	Function	MCU pin	Pin name	Pin number	CN number
-					I2C4_SCL	PD12	D15	10	
					I2C4_SDA	PD13	D14	9	
					AVDD	-	AVDD	8	
					Ground	-	GND	7	
CN19 power	1	-	-	5V_IN test	SPI2_SCK	PA12	D13	6	CN10 digital
	2	IOREF	-	3.3 V Ref.	SPI2_MISO	PB14	D12	5	
	3	NRST	NRST	Reset	TIM1_CH3N or SPI2_MOSI	PB15	D11	4	
	4	3V3	-	3.3 V output <sup>(1)</sup>	TIM5_CH4 or SPI2_NSS	PI0	D10	3	
	5	+5V	-	5 V output	TIM8_CH3	PI7	D9	2	
	6	GND	-	Ground	-	PF10	D8	1	
	7	GND	-	Ground	-				
	8	VIN	-	Power input <sup>(2)</sup>	-	PI10	D7	8	
-					TIM5_CH1	PH10	D6	7	CN11 digital
CN20 analog	1	A0	PA4	ADC1_INP18	TIM5_CH2	PH11	D5	6	
	2	A1	PC4	ADC12_INP4	-	PE2	D4	5	
	3 <sup>(3)</sup>	A2	PA0_C	ADC1_INP0	TIM12_CH2	PH9	D3	4	
	4 <sup>(3)</sup>	A3	PA1_C	ADC1_INP1	-	PI9	D2	3	
	5 <sup>(3)</sup>	A4	PC2_C or PD13 <sup>(4)</sup>	ADC2_INP0 or I2C4_SDA <sup>(4)</sup>	USART4_TX	PH13	D1	2	
	6 <sup>(3)</sup>	A5	PC3_C or PD12 <sup>(4)</sup>	ADC2_INP1 or I2C4_SCL <sup>(4)</sup>	USART4_RX	PH14	D0	1	

1. The 3V3 on ARD connector CN19 pin 4 is not a power input for the STM32H7B3I-DK board, to simplify the power architecture.
2. The external voltage applied to pin VIN on pin 8 of CN19 must be in the range of 6 to 9 V at 25°C ambient temperature. If a higher voltage is applied on the U3 regulator, it might overheat and be damaged.
3. Supports analog input only. The current capability is limited to 1 mA when used as digital input or output.
4. By default, pins 5 and 6 of the CN20 connector are connected to ADC MCU input ports PC2\_C and PC3\_C respectively, thanks to the configuration of solder bridges: SB52 and SB54 ON, SB53 and SB55 OFF. In case it is necessary to connect I<sup>2</sup>C interface signals on pins 5 and 6 of CN20 instead of ADC inputs, SB52 and SB54 are OFF, and SB53 and SB55 are ON.


Before using any ARDUINO® Uno V3 shield, it is important to refer to [Section 7.2](#) for a correct configuration of JPx.

**Caution:** The STM32 MCU I/Os are 3.3 V compatible instead of 5 V for ARDUINO® Uno V3.

## 8.11 Green audio jack - line out (CN5)


A green 3.5 mm stereo output audio jack (CN5) on the STM32H7B3I-DK board supports headphones.

**Figure 25. Stereo headset with a microphone jack (CN5)**



**Table 24. Audio jack connector (CN5) pinout**


Pin number	Description	Stereo headset with microphone pinning
1	NC	NA
2	NC	NA
3	GND	GND
4	OUT_Right	SPK_R (33 $\Omega$ typical)
5	NC	NA
6	OUT_Left	SPK_L (33 $\Omega$ typical)



## 8.12 Blue audio jack - line in (CN6)


A blue 3.5 mm stereo output audio jack (CN6) on the STM32H7B3I-DK board supports an audio line input.

**Figure 26. Stereo headset with a microphone input (CN6)**



**Table 25. Audio jack connector (CN6) pinout**

Pin number	Description	Stereo headset with microphone pinning
1	NC	NA
2	NC	NA
3	GND	GND
4	OUT_Right	SPK_R (33 $\Omega$ typical)
5	NC	NA
6	OUT_Left	SPK_L (33 $\Omega$ typical)



## 9 STM32H7B3I-DK I/O assignment

**Table 26. STM32H7B3I-DK I/O assignment**

Pin number	GPIO port	Signal or label	Comment
P1	PA0	I2S6_WS PMOD1-CTS	USART2_CTS
P2	PA1	LCD_BL_CTRL	-
R2	PA2	LCD_ON/OFF	-
R4	PA3	ULPI_D0 I2S6_MCK	-
L6	PA4	DCMI_HSYNC PMOD13-ADC ARD_A0	ADC1_INP18
N5	PA5	ULPI_CK	-
P5	PA6	DCMI_PIXCLK	-
R5	PA7	DCMI_PWR_EN	-
G11	PA8	MCO1	-
F12	PA9	USART1_TX	-
E13	PA10	USART1_RX	-
C15	PA11	PMOD1-NSS FDCAN_RX	SPI2_NSS
C14	PA12	PMOD4-SC/ARD_D13 FDCAN_TX	SPI2_SCK
E12	PA13	JTMS	-
B13	PA14	JTCK	-
C12	PA15	JTDI	-
P6	PB0	ULPI_D1 DFSDM1_2_CKOUT	-
L7	PB1	ULPI_D2	-
R6	PB2	OCSP11_CLK	-
C6	PB3	JTDO/TRACESWO	-
B5	PB4	NJTRST	-
E7	PB5	ULPI_D7	-
A4	PB6	EXT_RESET	-
D6	PB7	DCMI_VSYNC	-
B4	PB8	DCMI_D6 PMOD20-DF-CK7	-
A3	PB9	DCMI_D7 PMOD19-DF-D7	I/O, DFSDM1_DATIN7
R13	PB10	ULPI_D3	-
P13	PB11	ULPI_D4	-
N14	PB12	ULPI_D5 DFSDM1_2_DATIN1	-

Pin number	GPIO port	Signal or label	Comment
M13	PB13	ULPI_D6	-
M14	PB14	PMOD9-MISOs ARD_D12	SPI2_MISO
M15	PB15	PMOD8-MOSIs ARD_D11	SPI2_MOSI TIM1_CH3N
L3	PC0	ULPI_STP	-
M2	PC1	OCSP1_IO4	-
J5	PC2	PMOD3-MISOp	SPI2_MISO
N3	PC3	PMOD2-MOSIp	SPI2_MOSI
M6	PC4	ARD_A1	ADC12_INP4
N6	PC5	OCSP1_DQS	-
F14	PC6	PMOD11-INT	-
E15	PC7	PMOD17-DF-D3	DFSDM1_DATIN3
F13	PC8	SDIO1_D0	-
E14	PC9	SDIO1_D1 DCMI_D3	-
A13	PC10	SDIO1_D2	-
D11	PC11	SDIO1_D3 DCMI_D4	-
B12	PC12	SDIO1_CK	-
F4	PC13	WAKEUP	-
D1	PC14-OSC32_IN	-	-
D2	PC15-OSC32_OUT	-	-
C11	PD0	FMC_D2	-
A12	PD1	FMC_D3	-
B11	PD2	SDIO1_CMD	-
D10	PD3	DCMI_D5 PMOD18-DF-CKOUT	-
A11	PD4	PMOD4-RTS	USART2_RTS
C10	PD5	PMOD2-TX	USART2_TX
B10	PD6	PMOD3-RX	USART2_RX
A10	PD7	OSCP1_IO7	-
L12	PD8	FMC_D13	-
N15	PD9	FMC_D14	-
L13	PD10	FMC_D15	-
L14	PD11	OSCP1_IO0	-
L15	PD12	I2C4_SCL	-
K11	PD13	I2C4_SDA	-
K12	PD14	FMC_D0	-
K13	PD15	FMC_D1	-
B3	PE0	FMC_NBL0	-
C4	PE1	FMC_NBL1	-

Pin number	GPIO port	Signal or label	Comment
E5	PE2	ARD_D4	-
B1	PE3	SAI1_SD_B	-
C2	PE4	SAI1_FS_A	-
D3	PE5	SAI1_SCK_A	-
E4	PE6	SAI1_SD_A	-
M9	PE7	FMC_D4	-
R11	PE8	FMC_D5	-
P11	PE9	FMC_D6	-
N11	PE10	FMC_D7	-
R12	PE11	FMC_D8	-
L9	PE12	FMC_D9	-
M10	PE13	FMC_D10	-
N10	PE14	FMC_D11	-
P12	PE15	FMC_D12	-
G4	PF0	FMC_A0	-
G3	PF1	FMC_A1	-
H1	PF2	FMC_A2	-
J1	PF3	FMC_A3	-
H3	PF4	FMC_A4	-
J2	PF5	FMC_A5	-
J3	PF6	OSCP11_IO3	-
J4	PF7	OCSP11_IO2	-
K1	PF8	PMOD14-PWM	-
K2	PF9	OCSP11_IO1	-
M3	PF10	ARD_D8	-
N8	PF11	FMC_SDNRAS	-
R9	PF12	FMC_A6	-
M8	PF13	FMC_A7	-
P9	PF14	FMC_A8	-
N9	PF15	FMC_A9	-
R10	PG0	FMC_A10	-
P10	PG1	FMC_A11	-
H13	PG2	USER_LED2	-
G15	PG3	AUDIO_Nrst	-
H12	PG4	FMC_A14	-
G14	PG5	FMC_A15	-
G13	PG6	OCSP11_NCS	-
G12	PG7	SAI1_MCLK_A	-
F15	PG8	FMC_SDCLK	-
A9	PG9	OCSP11_IO6	-
A8	PG10	DCMI_D2	-

Pin number	GPIO port	Signal or label	Comment
B8	PG11	USER_LED1	-
C8	PG12	I2S6_SDI	-
D8	PG13	I2S6_CK	-
A7	PG14	I2S6_SDO	-
A5	PG15	FMC_SDNCAS	-
L1	PH0	OSC_IN	-
L2	PH1	OSC_OUT	-
M4	PH2	LCD_INT	-
N4	PH3	OCSP11_IO5	-
M5	PH4	ULPI_NXT	-
P4	PH5	FMC_SDNWE	-
M11	PH6	FMC_SDNE1	-
R14	PH7	FMC_SDCKE1	-
P14	PH8	PMOD12-RST II FDCAN_STBY	-
N13	PH9	ARD_D3	TIM12_CH2
M12	PH10	ARD_D6	TIM5_CH1
P15	PH11	ARD_D5	TIM5_CH2
L11	PH12	USB_OTG_HS_OVCR	-
D13	PH13	ARD_D1	UART4_TX
B15	PH14	ARD_D0	UART4_RX
B14	PH15	MEMS_LED	-
C13	PI0	ARD_D10	SPI2_NSS/TIM5_CH4
E11	PI1	WIFI_RST	-
D12	PI2	WIFI_WKUP	-
A14	PI3	WIFI_BOOT	-
A2	PI4	WIFI_GPIO	-
B2	PI5	WIFI_DATRDY	-
C3	PI6	-	-
D4	PI7	ARD_D9	TIM8_CH3
C1	PI8	uSD_Detect	-
E3	PI9	ARD_D2	-
F3	PI10	ARD_D7	-
G5	PI11	ULPI_DIR	-
H2	PI12	LCD_HSYNC	-
H5	PI13	LCS_VSYNC	-
H4	PI14	LCD_CLK	-
M7	PI15	LCD_R0	-
N7	PJ0	LCD_R1	-
P7	PJ1	LCD_R2	-
R7	PJ2	LCD_R3	-

Pin number	GPIO port	Signal or label	Comment
R8	PJ3	LCD_R4	-
P8	PJ4	LCD_R5	-
N12	PJ5	LCD_R6	-
K14	PJ6	LCD_R7	-
K15	PJ7	LCD_G0	-
J15	PJ8	LCD_G1	-
J14	PJ9	LCD_G2	-
J13	PJ10	LCD_G3	-
J11	PJ11	LCD_G4	-
E9	PJ12	LCD_B0	-
D9	PJ13	LCD_B1	-
C9	PJ14	LCD_B2	-
B9	PJ15	LCD_B3	-
J12	PK0	LCD_G5	-
H15	PK1	LCD_G6	-
H14	PK2	LCD_G7	-
B7	PK3	LCD_B4	-
C7	PK4	LCD_B5	-
A6	PK5	LCD_B6	-
B6	PK6	LCD_B7	-
D7	PK7	LCD_DE	-
P3	PA0_C	ARD_A2	ADC1_INP0
R3	PA1_C	ARD_A3	ADC1_INP1
N1	PC2_C	ARD_A4	ADC2_INP0
N2	PC3_C	ARD_A5	ADC2_INP1
K3	NRST	-	-
C5	BOOT0	-	-
D5	PDR_ON	-	-

## 10 STMod+ GPIO sharing and multiplexing

Table 27 describes the signals available on the STMod+ connector. It also shows which signal is shared with other board connectors (such as camera, ARDUINO® Uno V3, DFSDM, or Wi-Fi®). Solder bridges (SB) are present to select manually which function is wired by default.

Analog signals are in brackets [xxx].

The I<sup>2</sup>C bus is shared with the ARDUINO® Uno V3 connectors. It is recommended to check the device server address when adding it to the bus.



**Table 27. STMod+ GPIO sharing and multiplexing**

Shared or exclusive functions			STMod+								Shared or exclusive functions				
Wi-Fi®	ARD	Some other alternate functions	Basic	SB	Port	Pins		Port	SB	Basic	Some other alternate functions	ARD	DFSDM	DCMI	
CTS2	-	TIM2_CH1, TIM2_ETR, TIM5_CH1, TIM8_ETR, SPI6_NSS, USART2_NSS, UART4_TX, [ADC1_INP16]	CTS2	6	PA0	1		11	PC6	-	INT	TIM3_CH1, TIM8_CH1, USART6_TX	-	-	D0
NSS2	-	TIM1_CH4, LPUART1_CTS, SPI2_NSS, UART4_RX, USART1_CTS, FDCAN1_RX	NSS2	7	PA11			12	PH8	-	RST	TIM5_ETR, I2C3_SDA	-	-	-
MOSI2	-	FDCAN_TXFD	MOSI2	8	PC3			13	PA4	-	ADC	TIM5_ETR, SPI1_NSS, SPI3_NSS, SPI6_NSS	A0	-	HSYN C
TX2	-		TX2	9	PD5			14	PF8	-	PWM	TIM16_CH1N, SPI5_MISO, UART7_TRS, TIM13_CH1	-	-	-
MOSI2	-	SPI3_MOSI, FDCAN2_RXFD	MISO2	10	PC2			15	+5V	-	+5V	-	-	-	-
RX2	-		RX2	11	PD6			16	GND	-	GND	-	-	-	-
SCK2	D13	TIM1_ETR, LPUART1_RTS, UART4_TX, UART1_RTS, FDCAN1_TX	SCK2	12	PA12			17	PC7	-	GPIO	TIM8_CH2, USART6_RX	-	DATA3	D1
RTS2	-	FDCAN1_RXFD	RTS2	13	PD4			18	PD3	-	GPIO	SPI2_SCK, USART2_CTS, USART2_NSS	-	CKOUT	-
-	-	-	GND	-	GND			19	PB9	-	GPIO	TIM17_CH1, TIM4_CH4, I2C1_SDA, SPI2_NSS, I2C4_SDA, UART4_TX, FDCAN1_TX	-	DATA7	D7
-	-	-	+5V	-	+5V			20	PB8	-	GPIO	TIM16_CH1, TIM4_CH3, I2C1_SCL, I2C4_SCL, UART4_TX, FDCAN1_RX	-	CK7	D6
SCL4	SCL4	TIM4_CH1, USART3_RTS	SCL4	-	PD12	7									
-	D11	TIM1_CH3N, TIM12_CH2, TIM8_CH3N, USART1_RX, USART4_CTS	MOSI2	-	PB15	8									
-	D12	TIM1_CH2N, TIM12_CH1, TIM8_CH2N, USART1_TX, USART3_RTS, USART4_RTS	MISO2	-	PB14	9									
SDA4	SDA4	TIM4_CH2, UART9_RTS	SDA4	-	PD13	10									




## 11 STM32H7B3I-DK product information

### 11.1 Product marking

The product and each board composing the product are identified with one or several stickers. The stickers, located on the top or bottom side of each PCB, provide product information:

- Main board featuring the target device: product order code, product identification, serial number, and board reference with revision.

Single-sticker example:




Dual-sticker example:



- Other boards if any: board reference with revision and serial number.

Examples:

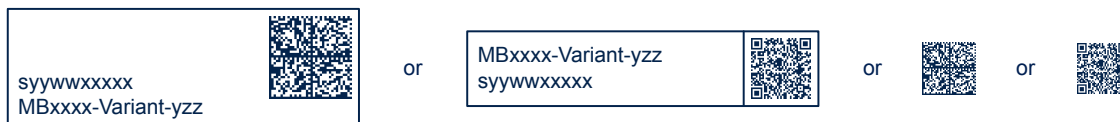

On the main board sticker, the first line provides the product order code, and the second line the product identification.

On all board stickers, the line formatted as “MBxxxx-Variant-yyz” shows the board reference “MBxxxx”, the mounting variant “Variant” when several exist (optional), the PCB revision “y”, and the assembly revision “zz”, for example B01. The other line shows the board serial number used for traceability.

Products and parts labeled as “ES” or “E” are not yet qualified or feature devices that are not yet qualified. STMicroelectronics disclaims any responsibility for consequences arising from their use. Under no circumstances will STMicroelectronics be liable for the customer's use of these engineering samples. Before deciding to use these engineering samples for qualification activities, contact STMicroelectronics' quality department.

“ES” or “E” marking examples of location:

- On the targeted STM32 that is soldered on the board (for an illustration of STM32 marking, refer to the STM32 datasheet *Package information* paragraph at the [www.st.com](http://www.st.com) website).
- Next to the ordering part number of the evaluation tool that is stuck, or silk-screen printed on the board.

Some boards feature a specific STM32 device version, which allows the operation of any bundled commercial stack/library available. This STM32 device shows a “U” marking option at the end of the standard part number and is not available for sales.

To use the same commercial stack in their applications, the developers might need to purchase a part number specific to this stack/library. The price of those part numbers includes the stack/library royalties.

## 11.2 STM32H7B3I-DK product history

Table 28. Product history

Order code	Product identification	Product details	Product change description	Product limitations
STM32H7B3I-DK	DK32H7B3I\$AT1	MCU: • STM32H7B3LIH6Q silicon revision "Z"	Initial revision	Incomplete main board/fanout board connection
		MCU errata sheet: • STM32H7A3xI/G, STM32H7B0xB and STM32H7B3xI device errata (ES0478)		
		Boards: • MB1332-H7B3I-B02 (main board) • MB1315-Default-A01 (LCD daughterboard) • MB1280-Default-A03 (fanout board) • MB1486-Soldered-A02 (Wi-Fi® module)		
	DK32H7B3I\$AT2	MCU: • STM32H7B3LIH6Q silicon revision "Z"	• Main board revision changed • Fanout board revision changed	No limitation
		MCU errata sheet: • STM32H7A3xI/G, STM32H7B0xB and STM32H7B3xI device errata (ES0478)		
		Boards: • MB1332-H7B3I-C01 (main board) • MB1315-Default-A01 (LCD daughterboard) • MB1280-Default-B01 (fanout board) • MB1486-Soldered-A02 (Wi-Fi® module)		
	DK32H7B3I\$AT3	MCU: • STM32H7B3LIH6Q silicon revision "Z"	Fanout board revision changed	No limitation
		MCU errata sheet: • STM32H7A3xI/G, STM32H7B0xB and STM32H7B3xI device errata (ES0478)		
		Boards: • MB1332-H7B3I-C01 (main board) • MB1315-Default-A01 (LCD daughterboard) • MB1280-3V3-C01 (fanout board) • MB1486-Soldered-A02 (Wi-Fi® module)		

Order code	Product identification	Product details	Product change description	Product limitations
STM32H7B3I-DK	DK32H7B3I\$AT4	MCU: <ul style="list-style-type: none"> <li>STM32H7B3LIH6Q silicon revision "X"</li> </ul> MCU errata sheet: <ul style="list-style-type: none"> <li>STM32H7A3xI/G, STM32H7B0xB and STM32H7B3xI device errata (ES0478)</li> </ul> Boards: <ul style="list-style-type: none"> <li>MB1332-H7B3I-C02 (main board)</li> <li>MB1315-Default-A02 (LCD daughterboard)</li> <li>MB1280-3V3-C01 (fanout board)</li> <li>MB1486-Soldered-A03 (Wi-Fi® module)</li> </ul>	<ul style="list-style-type: none"> <li>Main board revision changed</li> <li>LCD daughterboard revision changed</li> <li>Wi-Fi® module changed</li> <li>MCU silicon revision changed</li> <li>Packaging: plastic blister replaced by a carton box</li> </ul>	No limitation
	DK32H7B3I\$AT5	MCU: <ul style="list-style-type: none"> <li>STM32H7B3LIH6Q silicon revision "X"</li> <li>Main board revision changed</li> </ul> MCU errata sheet: <ul style="list-style-type: none"> <li>STM32H7A3xI/G, STM32H7B0xB and STM32H7B3xI device errata (ES0478)</li> </ul> Boards: <ul style="list-style-type: none"> <li>MB1332-H7B3I-C03 (main board)</li> <li>MB1315-Default-A03 (LCD daughterboard)</li> <li>MB1280-3V3-C01 (fanout board)</li> <li>MB1486-Soldered-A03 (Wi-Fi® module)</li> </ul>	<ul style="list-style-type: none"> <li>Main board revision changed</li> <li>LCD daughterboard revision changed</li> </ul>	No limitation

## 11.3 Board revision history

Table 29. Board revision history

Board reference	Board variant and revision	Board change description	Board limitations
MB1332 (main board)	H7B3I-B02	Initial revision	The STMod+ connector (P1) on the bottom side of the main board does not allow a full plug of the MB1280 fanout board
	H7B3I-C01	STMod+ connector (P1) moved to the top side	No limitation
	H7B3I-C02	Several part references are updated due to obsolescence, such as transistors or others. Refer to the bill of materials for details).	No limitation
	H7B3I-C03	Several part references are updated due to obsolescence, such as LEDs or others. Refer to the bill of materials for details).	No limitation
MB1315 (LCD daughterboard)	Default-A01	Initial revision	No limitation
	Default-A02	Several part references are updated due to obsolescence, such as transistors or others. Refer to the bill of materials for details).	No limitation
	Default-A03	Several part references are updated due to obsolescence, such as the LCD ROCKTECH - RK043FN48H-CT672B replaced with new ROCKTECH - RK043FN88H-CT661C with impact on firmware. Refer to the bill of materials for details).	No limitation
MB1280 (fanout board)	Default-A03	Initial revision	No limitation
	Default-B01	The Altium project has been updated with the ST standard library.	The Grove connector does not support the 5 V I <sup>2</sup> C interface.
	3V3-C01	Updated: <ul style="list-style-type: none"> <li>Several part references are updated due to obsolescence, such as transistors. Refer to the bill of materials for details.</li> <li>T1 and T2 wiring</li> <li>Silkscreens, logos, and PCB mechanical size</li> </ul>	No limitation
MB1486 (Wi-Fi® module)	Soldered-A02	Initial revision	No limitation
	Soldered-A03	Several part references are updated due to obsolescence, such as capacitors. Refer to the bill of materials for details.	No limitation

## 12 Federal Communications Commission (FCC) and ISED Canada Compliance Statements

### 12.1 FCC Compliance Statement

Contains FCC ID: O7P-341

#### Part 15.19

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### Part 15.21

Any changes or modifications to this equipment not expressly approved by STMicroelectronics may cause harmful interference and void the user's authority to operate this equipment.

#### Part 15.105

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

#### Responsible Party - U.S. Contact Information:

Francesco Doddo  
STMicroelectronics, Inc.  
200 Summit Drive | Suite 405 | Burlington, MA 01803  
USA  
Telephone: +1 781-472-9634

## 12.2 ISED Compliance Statement

Contains/Contient IC: 10147A-341

### Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

ISED Canada ICES-003 Compliance Label: CAN ICES-3 (A) / NMB-3 (A).

### Déclaration de conformité

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage ;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Étiquette de conformité à la NMB-003 d'Industrie Canada : CAN ICES-3 (A) / NMB-3 (A).

### RF exposure statement

To satisfy FCC and ISED Exposure requirements for mobile devices, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during operation. To ensure compliance, operation at closer than this distance is not recommended. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Pour satisfaire aux exigences FCC et ISED concernant l'exposition aux champs RF pour les appareils mobiles, une distance de séparation de 20 cm ou plus doit être maintenu entre l'antenne de ce dispositif et les personnes pendant le fonctionnement. Pour assurer la conformité, il est déconseillé d'utiliser cet équipement à une distance inférieure. Cet émetteur ne doit pas être co-situé ou fonctionner conjointement avec une autre antenne ou un autre émetteur.

## 13 UKCA Compliance Statement

---

### SIMPLIFIED UK DECLARATION OF CONFORMITY

Hereby, the manufacturer STMicroelectronics, declares that the radio equipment type “STM32H7B3I-DK” is in compliance with the UK Radio Equipment Regulations 2017 (UK S.I. 2017 No. 1206). The full text of the UK Declaration of Conformity is available at the following internet address: [www.st.com](http://www.st.com).



## 14 CE conformity

---

### 14.1 Simplified EU compliance statement

Hereby, STMicroelectronics declares that the radio equipment type "STM32H7B3I-DK" is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available on demand at the following address: [www.st.com](http://www.st.com).

### 14.2 Déclaration de conformité UE simplifiée

STMicroelectronics déclare que l'équipement radioélectrique du type "STM32H7B3I-DK" est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible sur demande à l'adresse internet suivante : [www.st.com](http://www.st.com).

### 14.3 Warning

#### EN 55032 / CISPR32 (2012) Class A product


Warning: this device is compliant with Class A of EN55032 / CISPR32. In a residential environment, this equipment may cause radio interference.

Avertissement : cet équipement est conforme à la Classe A de la EN55032 / CISPR 32. Dans un environnement résidentiel, cet équipement peut créer des interférences radio.

## 15 Product disposal

### Disposal of this product: WEEE (Waste Electrical and Electronic Equipment)

(Applicable in Europe)



This symbol on the product, accessories, or accompanying documents indicates that the product and its electronic accessories should not be disposed of with household waste at the end of their working life.

To prevent possible harm to the environment and human health from uncontrolled waste disposal, please separate these items from other type of waste and recycle them responsibly to the designated collection point to promote the sustainable reuse of material resources.

#### Household users:

You should contact either the retailer where you buy the product or your local authority for further details of your nearest designated collection point.

#### Business users:

You should contact your dealer or supplier for further information.

## Revision history

**Table 30. Document revision history**

Date	Revision	Changes
19-Dec-2019	1	Initial release.
19-Oct-2020	2	Added <i>Section 10 STM32H7B3I-DK board information</i> including <i>Product marking</i> moved from <i>Section 2 Ordering information</i> . Updated <i>Section 3 Development environment</i> , <i>Figure 4 to Figure 7</i> , <i>Section 9.4 P1 STMod+ connector</i> , and <i>Table 23. ARDUINO® Uno V3 compatible connectors pinout</i> . Removed the appendix on the fanout board.
11-Dec-2020	3	Updated functions in <i>Table 23. ARDUINO® Uno V3 compatible connectors pinout</i> and Canadian organization name in <i>Section Appendix C Federal Communications Commission (FCC) and Innovation, Science and Economic Development Canada (ISED) Compliance Statements</i> .
24-Mar-2021	4	Updated <i>STM32H7B3I-DK board information</i> including <i>Product marking</i> , <i>STM32H7B3I-DK product history</i> , and <i>Board revision history</i> .
4-May-2021	5	Added new <i>Product identification DK32H7B3I\$AT4</i> , <i>Board MB1332 revision C-02</i> , <i>Board MB1315 revision A-02</i> , and <i>Board MB1486 revision A-03</i> to <i>STM32H7B3I-DK board information</i> . Removed the former <i>Section 7 Technology partners</i> .
16-Sep-2021	6	Updated <i>Table 23</i> regarding limitation to analog input usage for CN20 A2 to A6 pins.
30-Jan-2025	7	Added <a href="#">Safety recommendations</a> , <a href="#">UKCA Compliance Statement</a> , <a href="#">CE conformity</a> , and <a href="#">Product disposal</a> . Updated <a href="#">STM32H7B3I-DK product information</a> with <a href="#">Product marking</a> , and added <a href="#">Product history</a> and <a href="#">Board revision history</a> tables.

## Contents

<b>1</b>	<b>Features</b>	<b>2</b>
<b>2</b>	<b>Ordering information</b>	<b>3</b>
2.1	Codification	3
<b>3</b>	<b>Development environment</b>	<b>4</b>
3.1	System requirements	4
3.2	Development toolchains	4
3.3	Demonstration software	4
3.4	CAD resources	4
<b>4</b>	<b>Conventions</b>	<b>5</b>
<b>5</b>	<b>Safety recommendations</b>	<b>6</b>
5.1	Targeted audience	6
5.2	Handling the board	6
5.3	Delivery recommendations	6
<b>6</b>	<b>Getting started</b>	<b>7</b>
<b>7</b>	<b>Hardware layout and configuration</b>	<b>8</b>
7.1	Embedded STLINK-V3E	11
7.1.1	Description	11
7.1.2	Drivers	11
7.1.3	STLINK-V3E firmware upgrade	12
7.1.4	Using an external debug tool to program and debug the onboard STM32	12
7.2	Power supply	13
7.2.1	Supplying the board through STLINK-V3E USB connector 5 V/500 mA	13
7.2.2	Supplying the STM32H7B3I-DK using the external power supply input from VIN (7 to 12 V, 800 mA max)	14
7.2.3	Supplying STM32H7B3I-DK using a USB charger (5 V)	14
7.2.4	Supplying STM32H7B3I-DK using USB OTG HS connector (5 V/500 mA)	14
7.2.5	MCU power supply—SMPS/LDO configuration	15
7.3	Measurement of MCU current consumption	18
7.4	Clock source	18
7.5	Reset sources	19
7.6	Board functions	19
7.6.1	TFT color LCD 480x272 pixels	19
7.6.2	USB OTG HS	19
7.6.3	EXT_I2C	19
7.6.4	microSD™ card	19

7.6.5	Audio	20
7.6.6	CAN FD	20
7.6.7	Octo-SPI NOR flash memory	20
7.6.8	SDRAM	20
7.6.9	Virtual COM port	21
7.6.10	TAG	21
7.6.11	Buttons and LEDs	21
7.6.12	Wi-Fi® RF module	22
<b>8</b>	<b>Board connectors</b>	<b>24</b>
8.1	STLINK-V3E USB Micro-B connector (CN14)	24
8.2	USB OTG HS Micro-AB connector (CN15)	25
8.3	microSD™ card connector (CN4)	26
8.4	STMod+ connector (P1)	27
8.5	Camera module connector (CN7)	28
8.6	TAG connector (CN12)	29
8.7	EXT_I2C connector (CN16)	30
8.8	Audio connector (CN3)	30
8.9	TFT LCD connector (CN1)	32
8.10	ARDUINO® Uno V3 connectors (CN10, CN11, CN19, and CN20)	33
8.11	Green audio jack - line out (CN5)	34
8.12	Blue audio jack - line in (CN6)	34
<b>9</b>	<b>STM32H7B3I-DK I/O assignment</b>	<b>35</b>
<b>10</b>	<b>STMod+ GPIO sharing and multiplexing</b>	<b>40</b>
<b>11</b>	<b>STM32H7B3I-DK product information</b>	<b>42</b>
11.1	Product marking	42
11.2	STM32H7B3I-DK product history	43
11.3	Board revision history	45
<b>12</b>	<b>Federal Communications Commission (FCC) and ISED Canada Compliance Statements</b>	<b>46</b>
12.1	FCC Compliance Statement	46
12.2	ISED Compliance Statement	47
<b>13</b>	<b>UKCA Compliance Statement</b>	<b>48</b>
<b>14</b>	<b>CE conformity</b>	<b>49</b>
14.1	Simplified EU compliance statement	49
14.2	Déclaration de conformité UE simplifiée	49
14.3	Warning	49

---

<b>15</b>	<b>Product disposal .....</b>	<b>.50</b>
	<b>Revision history .....</b>	<b>.51</b>
	<b>List of tables .....</b>	<b>.55</b>
	<b>List of figures.....</b>	<b>.56</b>

## List of tables

<b>Table 1.</b>	Ordering information . . . . .	3
<b>Table 2.</b>	Codification explanation . . . . .	3
<b>Table 3.</b>	ON/OFF convention . . . . .	5
<b>Table 4.</b>	MIPI10 debug connector (CN8) . . . . .	12
<b>Table 5.</b>	External power sources: VIN (7 to 12 V) . . . . .	14
<b>Table 6.</b>	External power source: CHGR (5 V) . . . . .	14
<b>Table 7.</b>	External power source: U5V (5 V) . . . . .	14
<b>Table 8.</b>	Internal SMPS/LDO and board configuration . . . . .	17
<b>Table 9.</b>	FD-CAN1–Solder bridge configuration . . . . .	20
<b>Table 10.</b>	Button and LED control port . . . . .	21
<b>Table 11.</b>	Wi-Fi® solder bridge configuration . . . . .	23
<b>Table 12.</b>	USB Micro-B connector (CN14) pinout . . . . .	24
<b>Table 13.</b>	USB OTG HS Micro-AB connector (CN15) pinout. . . . .	25
<b>Table 14.</b>	microSD™ connector (CN4) pinout . . . . .	26
<b>Table 15.</b>	STMod+ connector (P1) pinout . . . . .	27
<b>Table 16.</b>	Camera module connector (CN7) pinout . . . . .	29
<b>Table 17.</b>	TAG connector (CN12) pinout . . . . .	29
<b>Table 18.</b>	EXT_I2C connector (CN16) pinout . . . . .	30
<b>Table 19.</b>	I2C4 onboard addresses. . . . .	30
<b>Table 20.</b>	DFSDM solder bridge configuration . . . . .	30
<b>Table 21.</b>	Audio connector (CN3) pinout . . . . .	31
<b>Table 22.</b>	TFT LCD connector (CN1) . . . . .	32
<b>Table 23.</b>	ARDUINO® Uno V3 compatible connectors pinout . . . . .	33
<b>Table 24.</b>	Audio jack connector (CN5) pinout . . . . .	34
<b>Table 25.</b>	Audio jack connector (CN6) pinout . . . . .	34
<b>Table 26.</b>	STM32H7B3I-DK I/O assignment. . . . .	35
<b>Table 27.</b>	STMod+ GPIO sharing and multiplexing . . . . .	41
<b>Table 28.</b>	Product history . . . . .	43
<b>Table 29.</b>	Board revision history . . . . .	45
<b>Table 30.</b>	Document revision history . . . . .	51

## List of figures

<b>Figure 1.</b>	STM32H7B3I-DK top view . . . . .	1
<b>Figure 2.</b>	STM32H7B3I-DK bottom view . . . . .	1
<b>Figure 3.</b>	STM32H7B3I-DK hardware block diagram . . . . .	8
<b>Figure 4.</b>	STM32H7B3I-DK PCB layout (top view). . . . .	9
<b>Figure 5.</b>	STM32H7B3I-DK PCB layout (bottom view) . . . . .	9
<b>Figure 6.</b>	STM32H7B3I-DK board mechanical dimensions (top view, in millimeters) . . . . .	10
<b>Figure 7.</b>	STM32H7B3I-DK board mechanical dimensions (bottom view, in millimeters) . . . . .	10
<b>Figure 8.</b>	USB composite device. . . . .	11
<b>Figure 9.</b>	Connecting an external debug tool to program the onboard STM32H7B3LI . . . . .	12
<b>Figure 10.</b>	MCU power: SMPS/LDO . . . . .	15
<b>Figure 11.</b>	Config1 - LDO only . . . . .	16
<b>Figure 12.</b>	Config2 - SMPS only (default). . . . .	16
<b>Figure 13.</b>	Config3 - SMPS and LDO cascaded . . . . .	17
<b>Figure 14.</b>	Config4-External SMPS . . . . .	17
<b>Figure 15.</b>	Wi-Fi® module top view . . . . .	22
<b>Figure 16.</b>	Micro-B connector (CN14) front view . . . . .	24
<b>Figure 17.</b>	USB OTG HS Micro-AB connector (CN15) front view. . . . .	25
<b>Figure 18.</b>	microSD™ card connector (CN4). . . . .	26
<b>Figure 19.</b>	STMod+ connector (P1). . . . .	27
<b>Figure 20.</b>	Camera module connector (CN7) . . . . .	28
<b>Figure 21.</b>	TAG connector (CN12) . . . . .	29
<b>Figure 22.</b>	EXT_I2C connector (CN16) . . . . .	30
<b>Figure 23.</b>	Audio connector (CN3) . . . . .	31
<b>Figure 24.</b>	TFT LCD connector (CN1) . . . . .	32
<b>Figure 25.</b>	Stereo headset with a microphone jack (CN5) . . . . .	34
<b>Figure 26.</b>	Stereo headset with a microphone input (CN6) . . . . .	34



**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved