




SOLDER MASK TOP LAYER

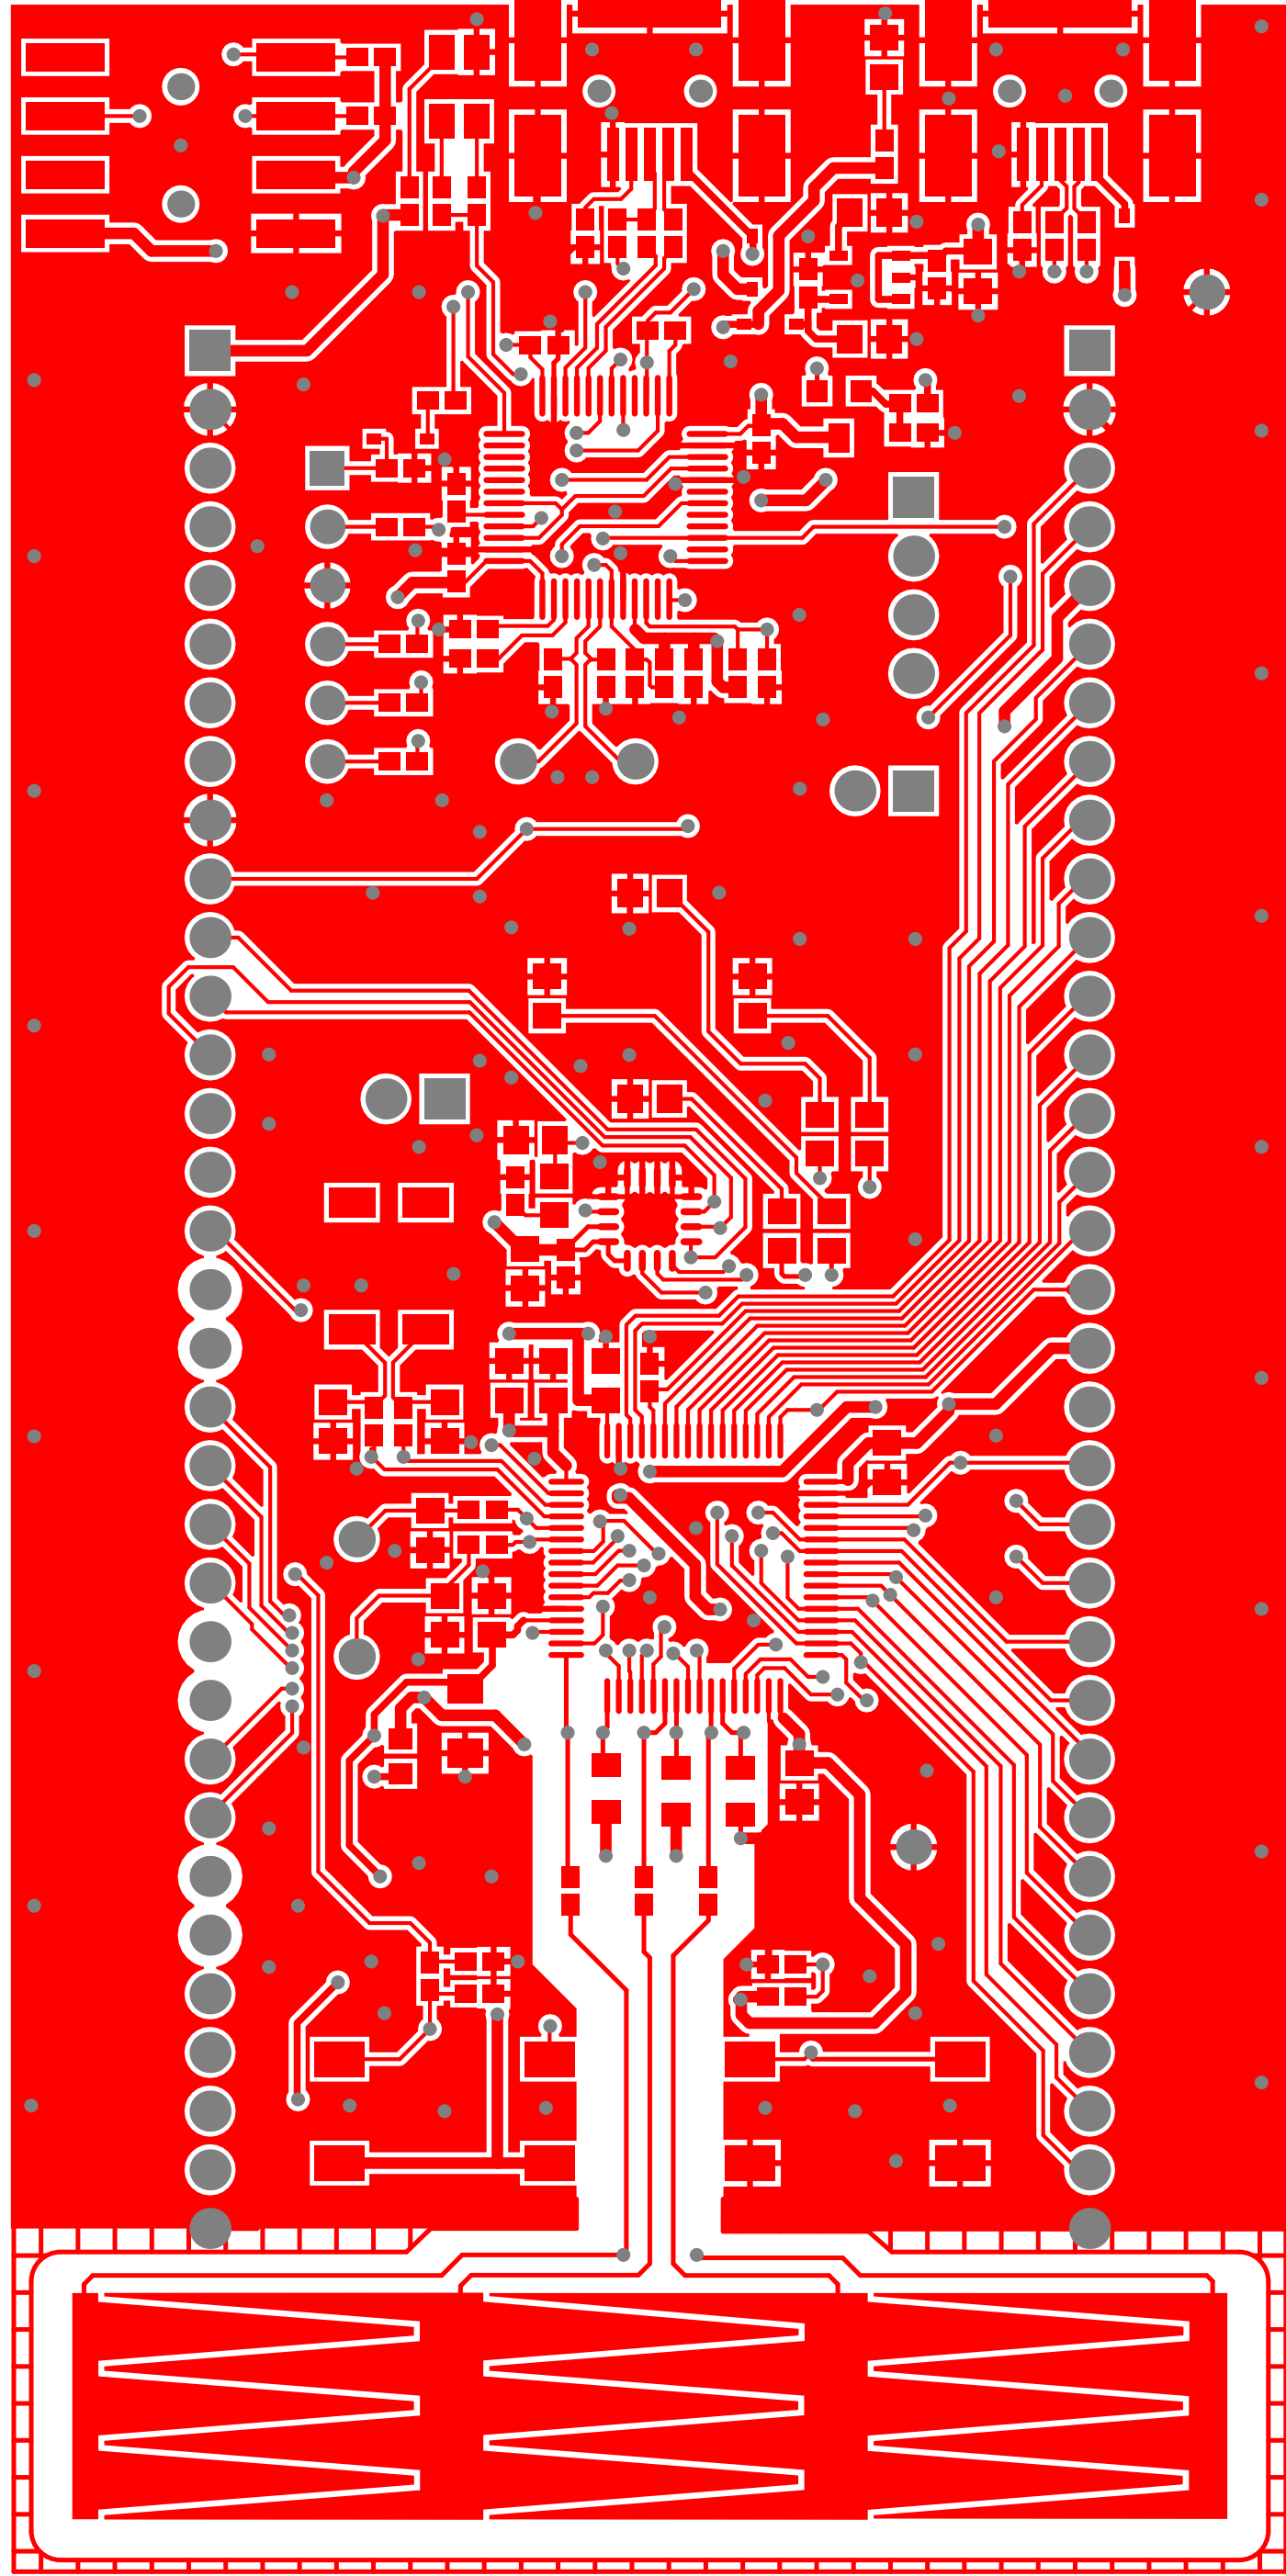


TOP LAYER

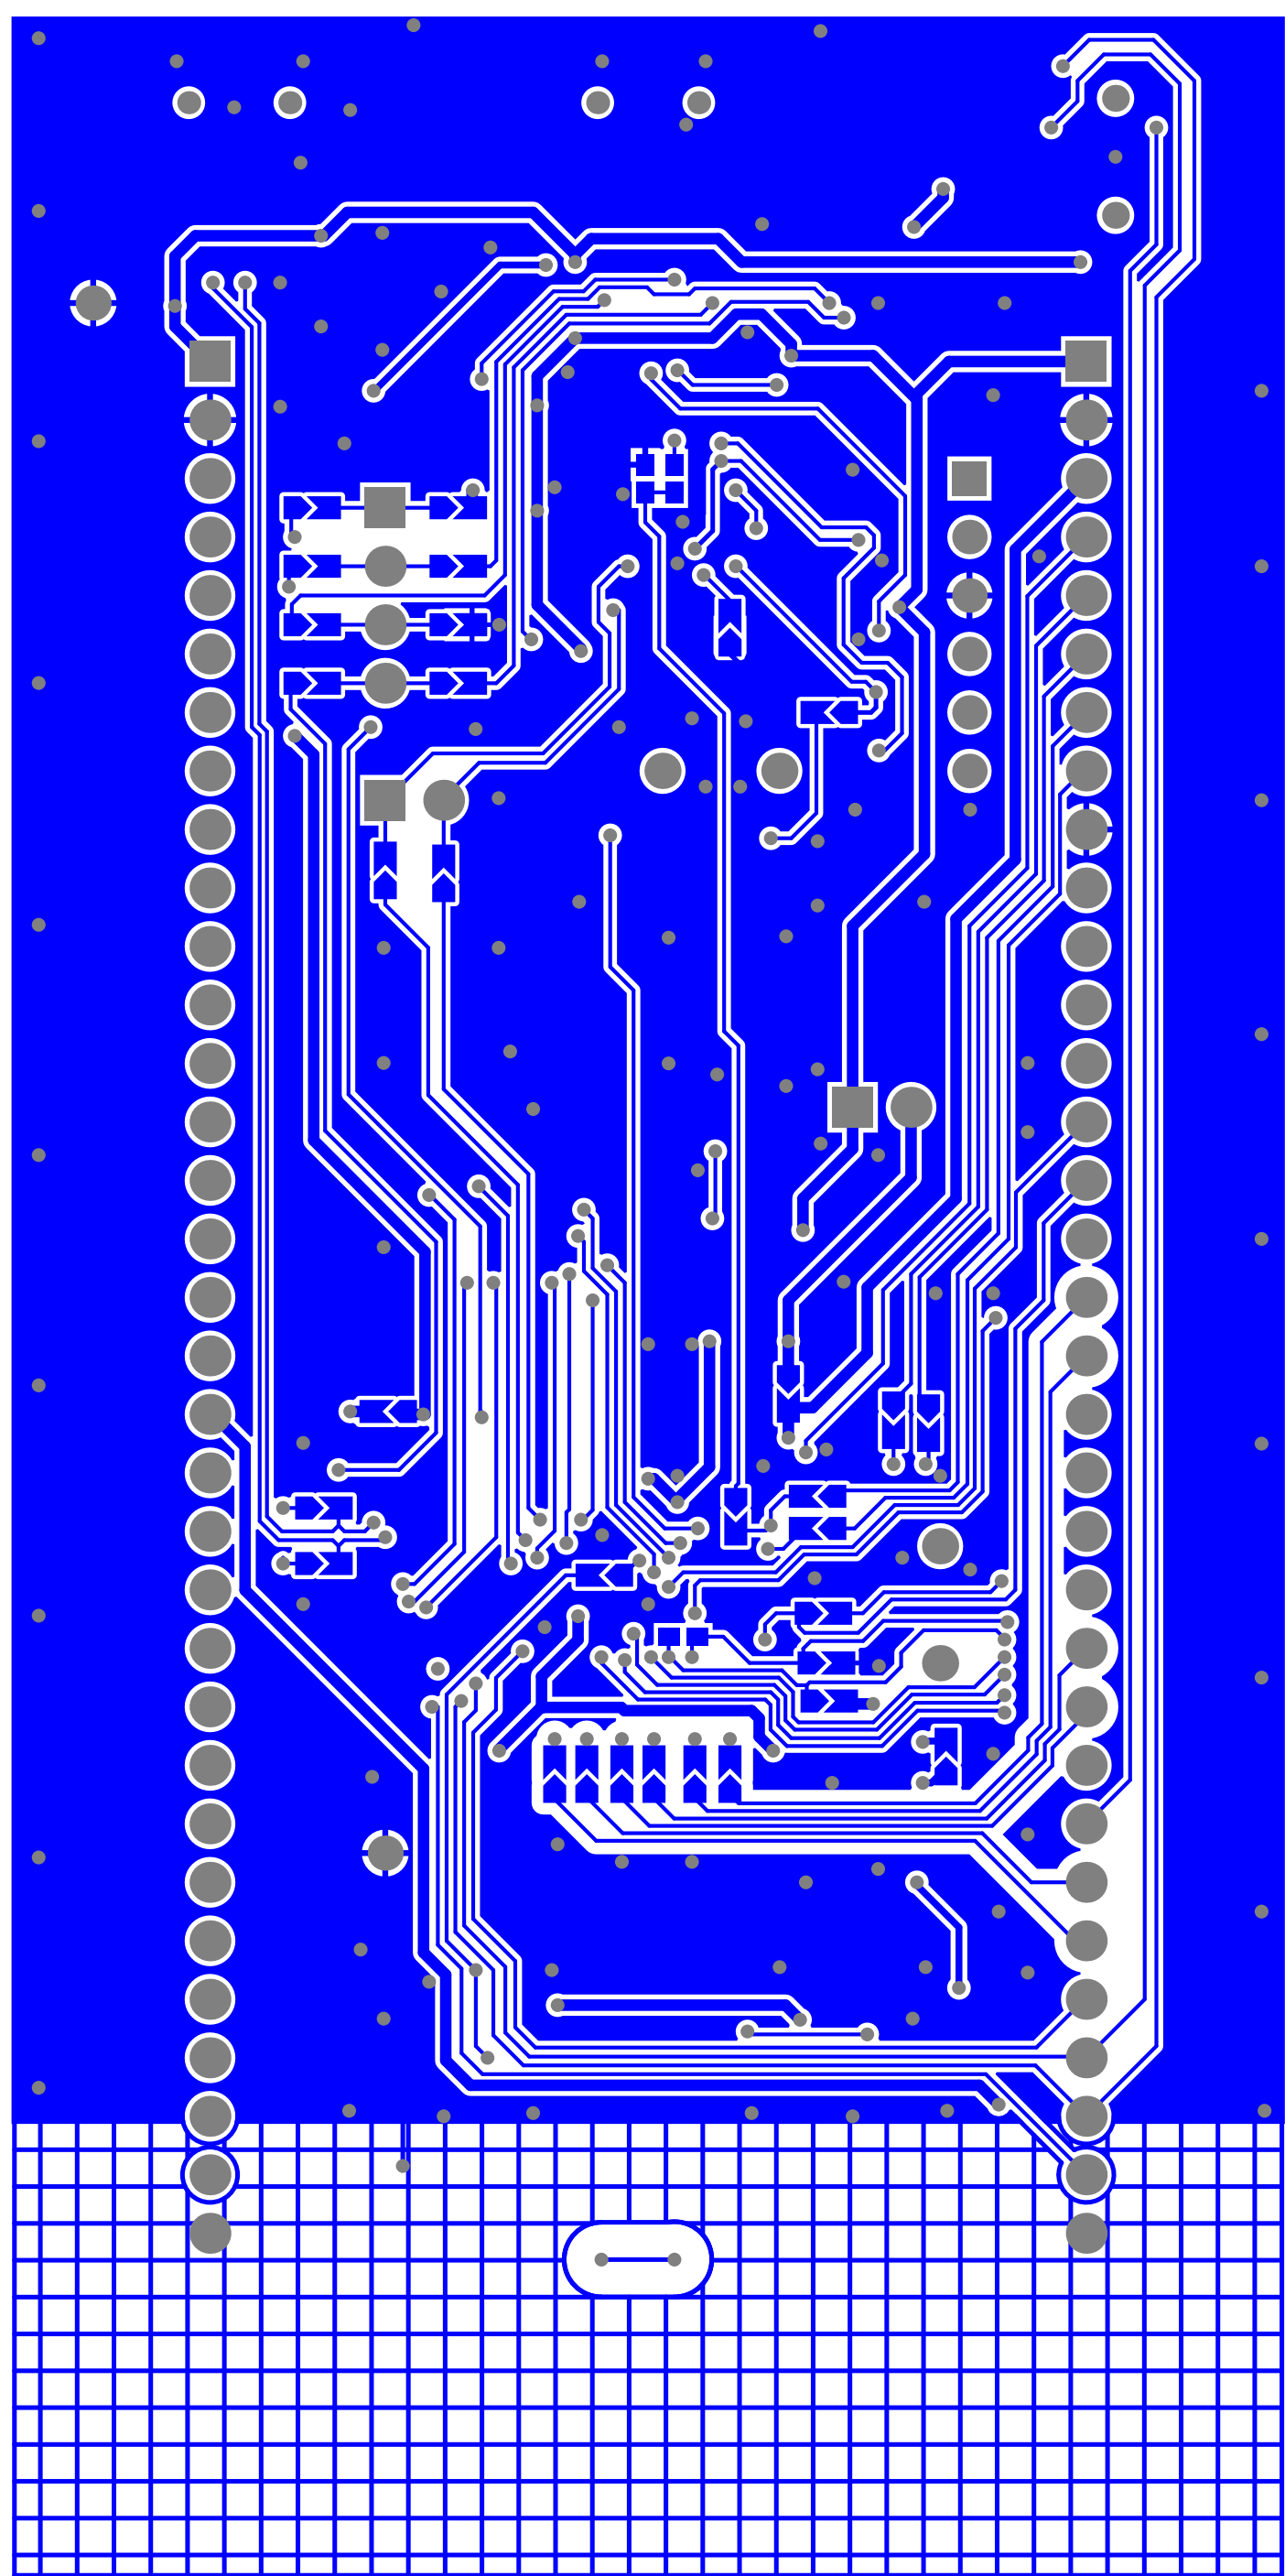


SOLDER MASK BOTTOM LAYER

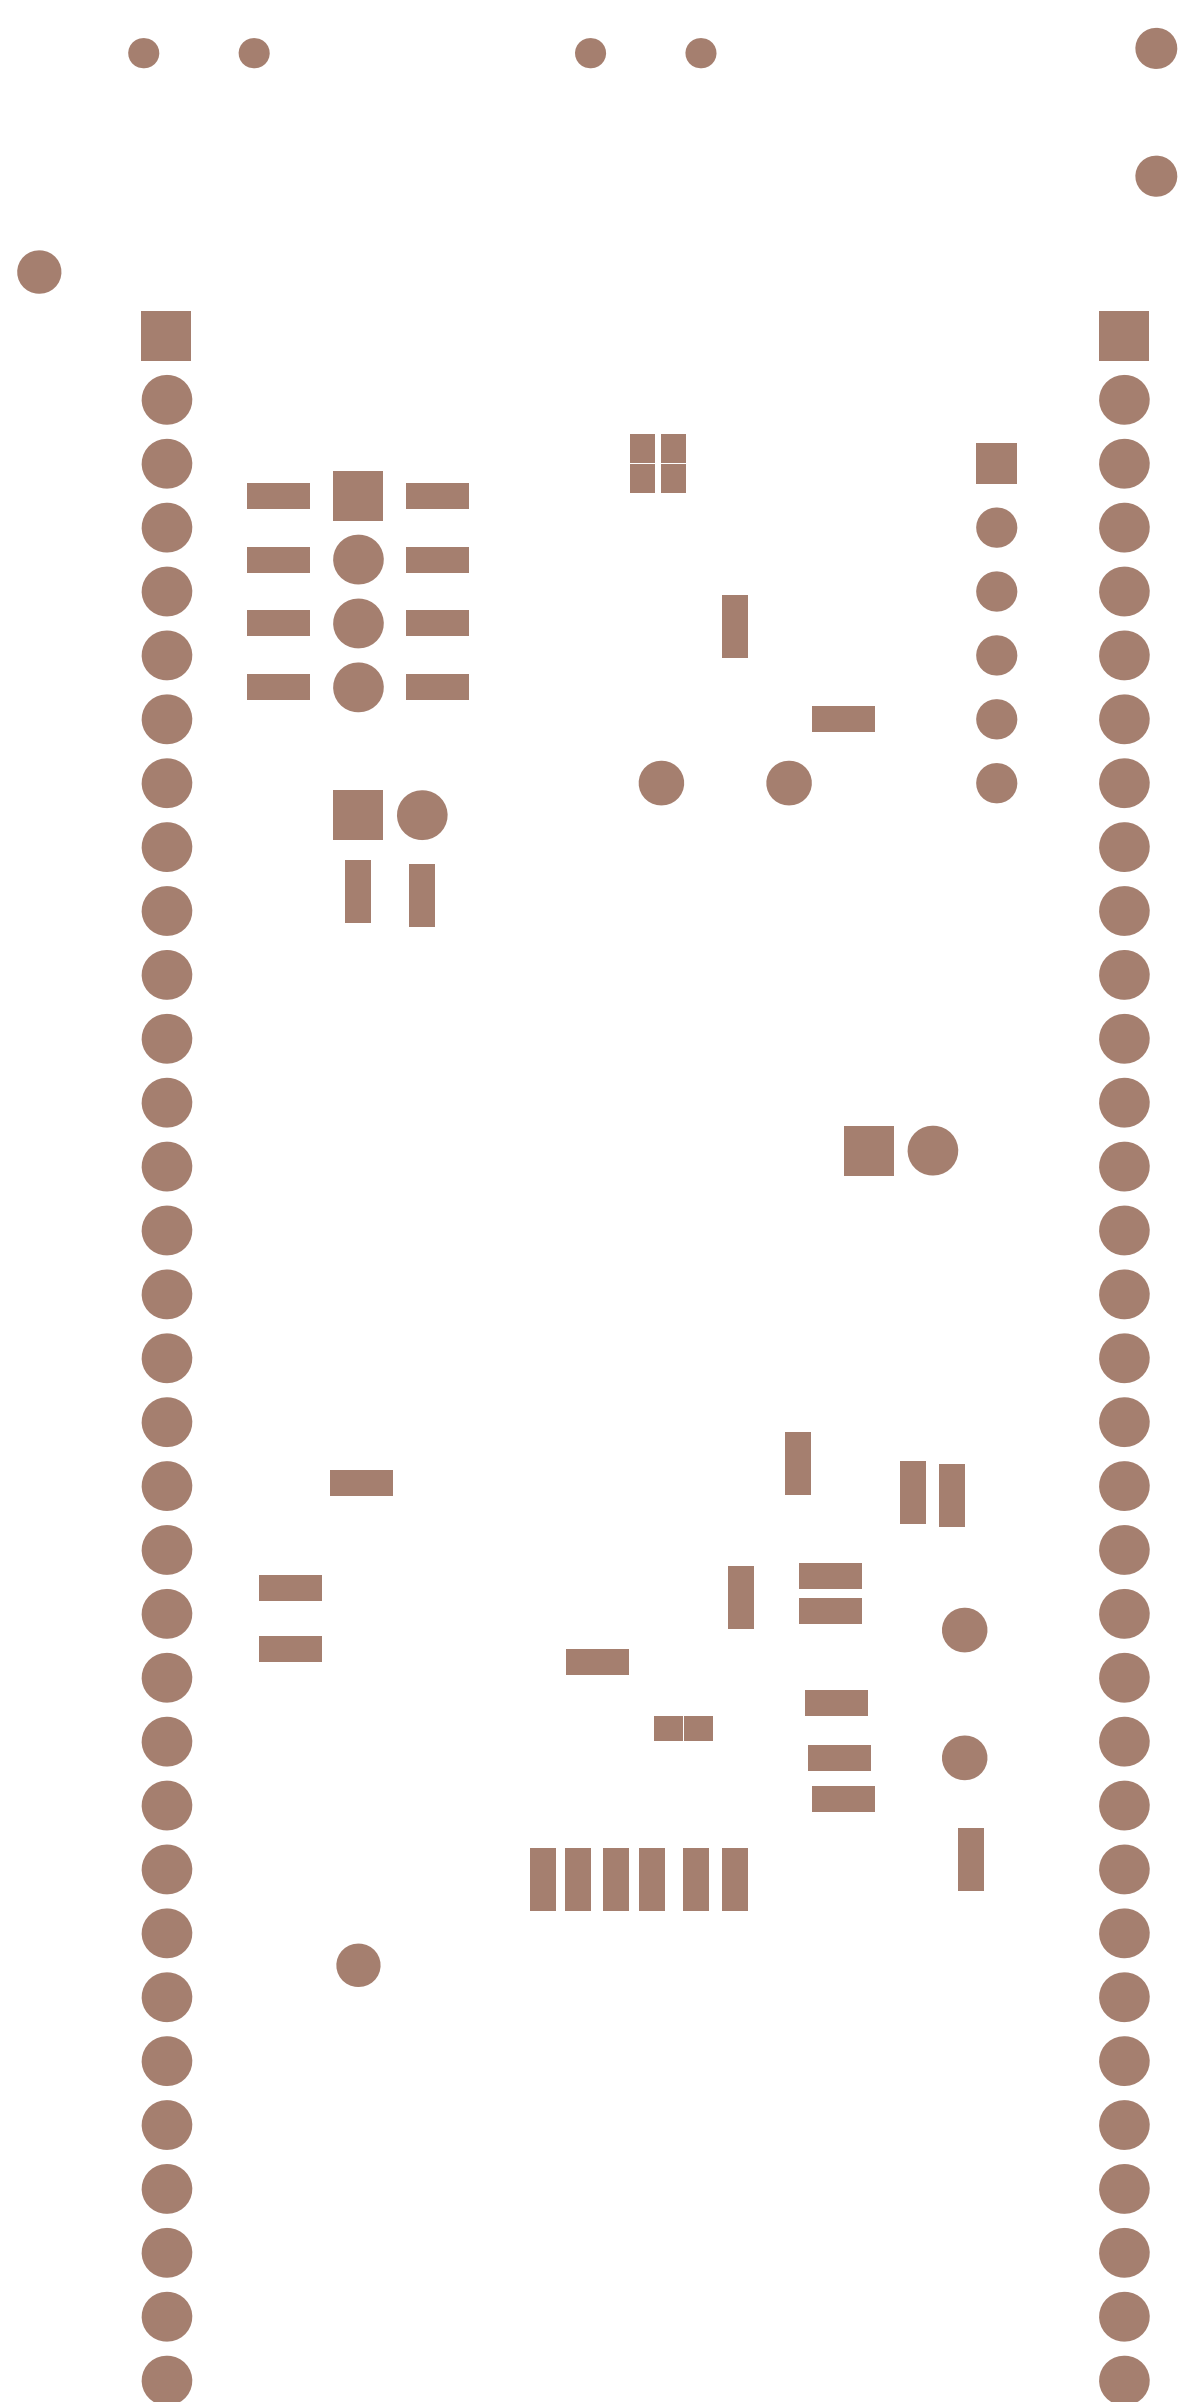

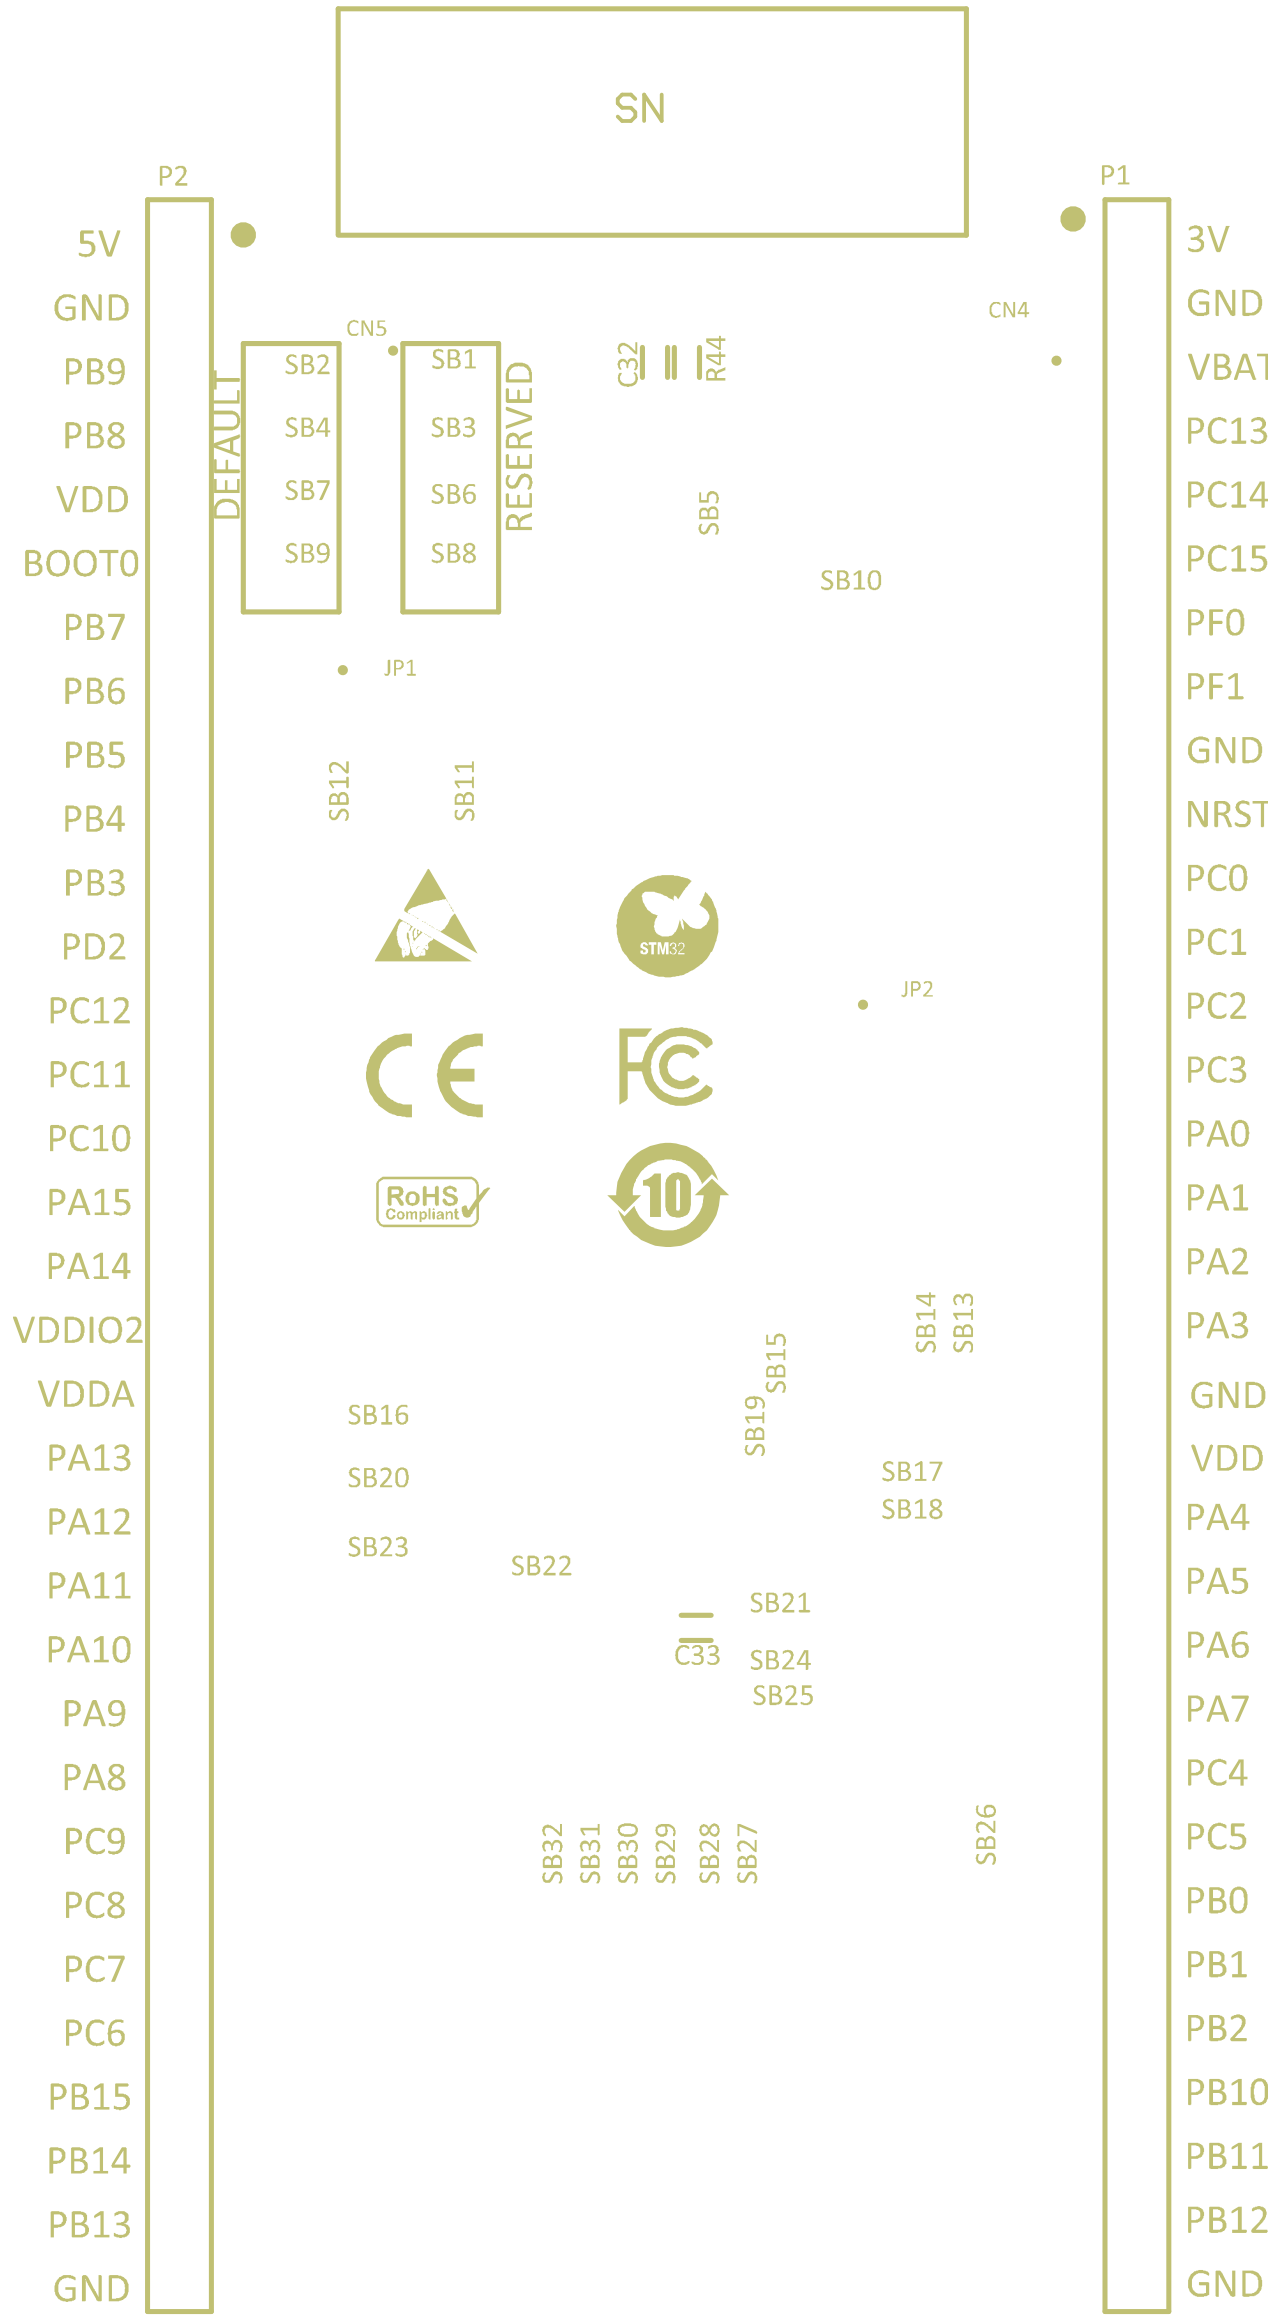

| Symbol | Hit Count | Finished Hole Size | Plated | Drill Layer Pair |
|--------|-----------|--------------------|--------|------------------|
| □ | 266 | 0.30mm | PTH | TOP - Bottom |
| ✧ | 4 | 0.70mm | PTH | TOP - Bottom |
| ✧ | 6 | 0.90mm | PTH | TOP - Bottom |
| ▽ | 4 | 1.00mm | NPTH | TOP - Bottom |
| ○ | 76 | 1.00mm | PTH | TOP - Bottom |
| ◻ | 2 | 1.20mm | NPTH | TOP - Bottom |
| | 358 Total | | | |

| F IMPEDANCE TABLE | | | | | |
|-------------------|----------------|-------------------|---------------------------|-----------------------------|-----------|
| LAYER | TRACE (mil) | SPACEING (mil) | IMPEDANCE (Single end) | IMPEDANCE (Differential) | TOLERANCE |
| N/A | N/A | N/A | N/A | N/A | +/-10% |
| 1,2 | 6.55 | 6.45 | N/A | 90 OHM | +/-10% |

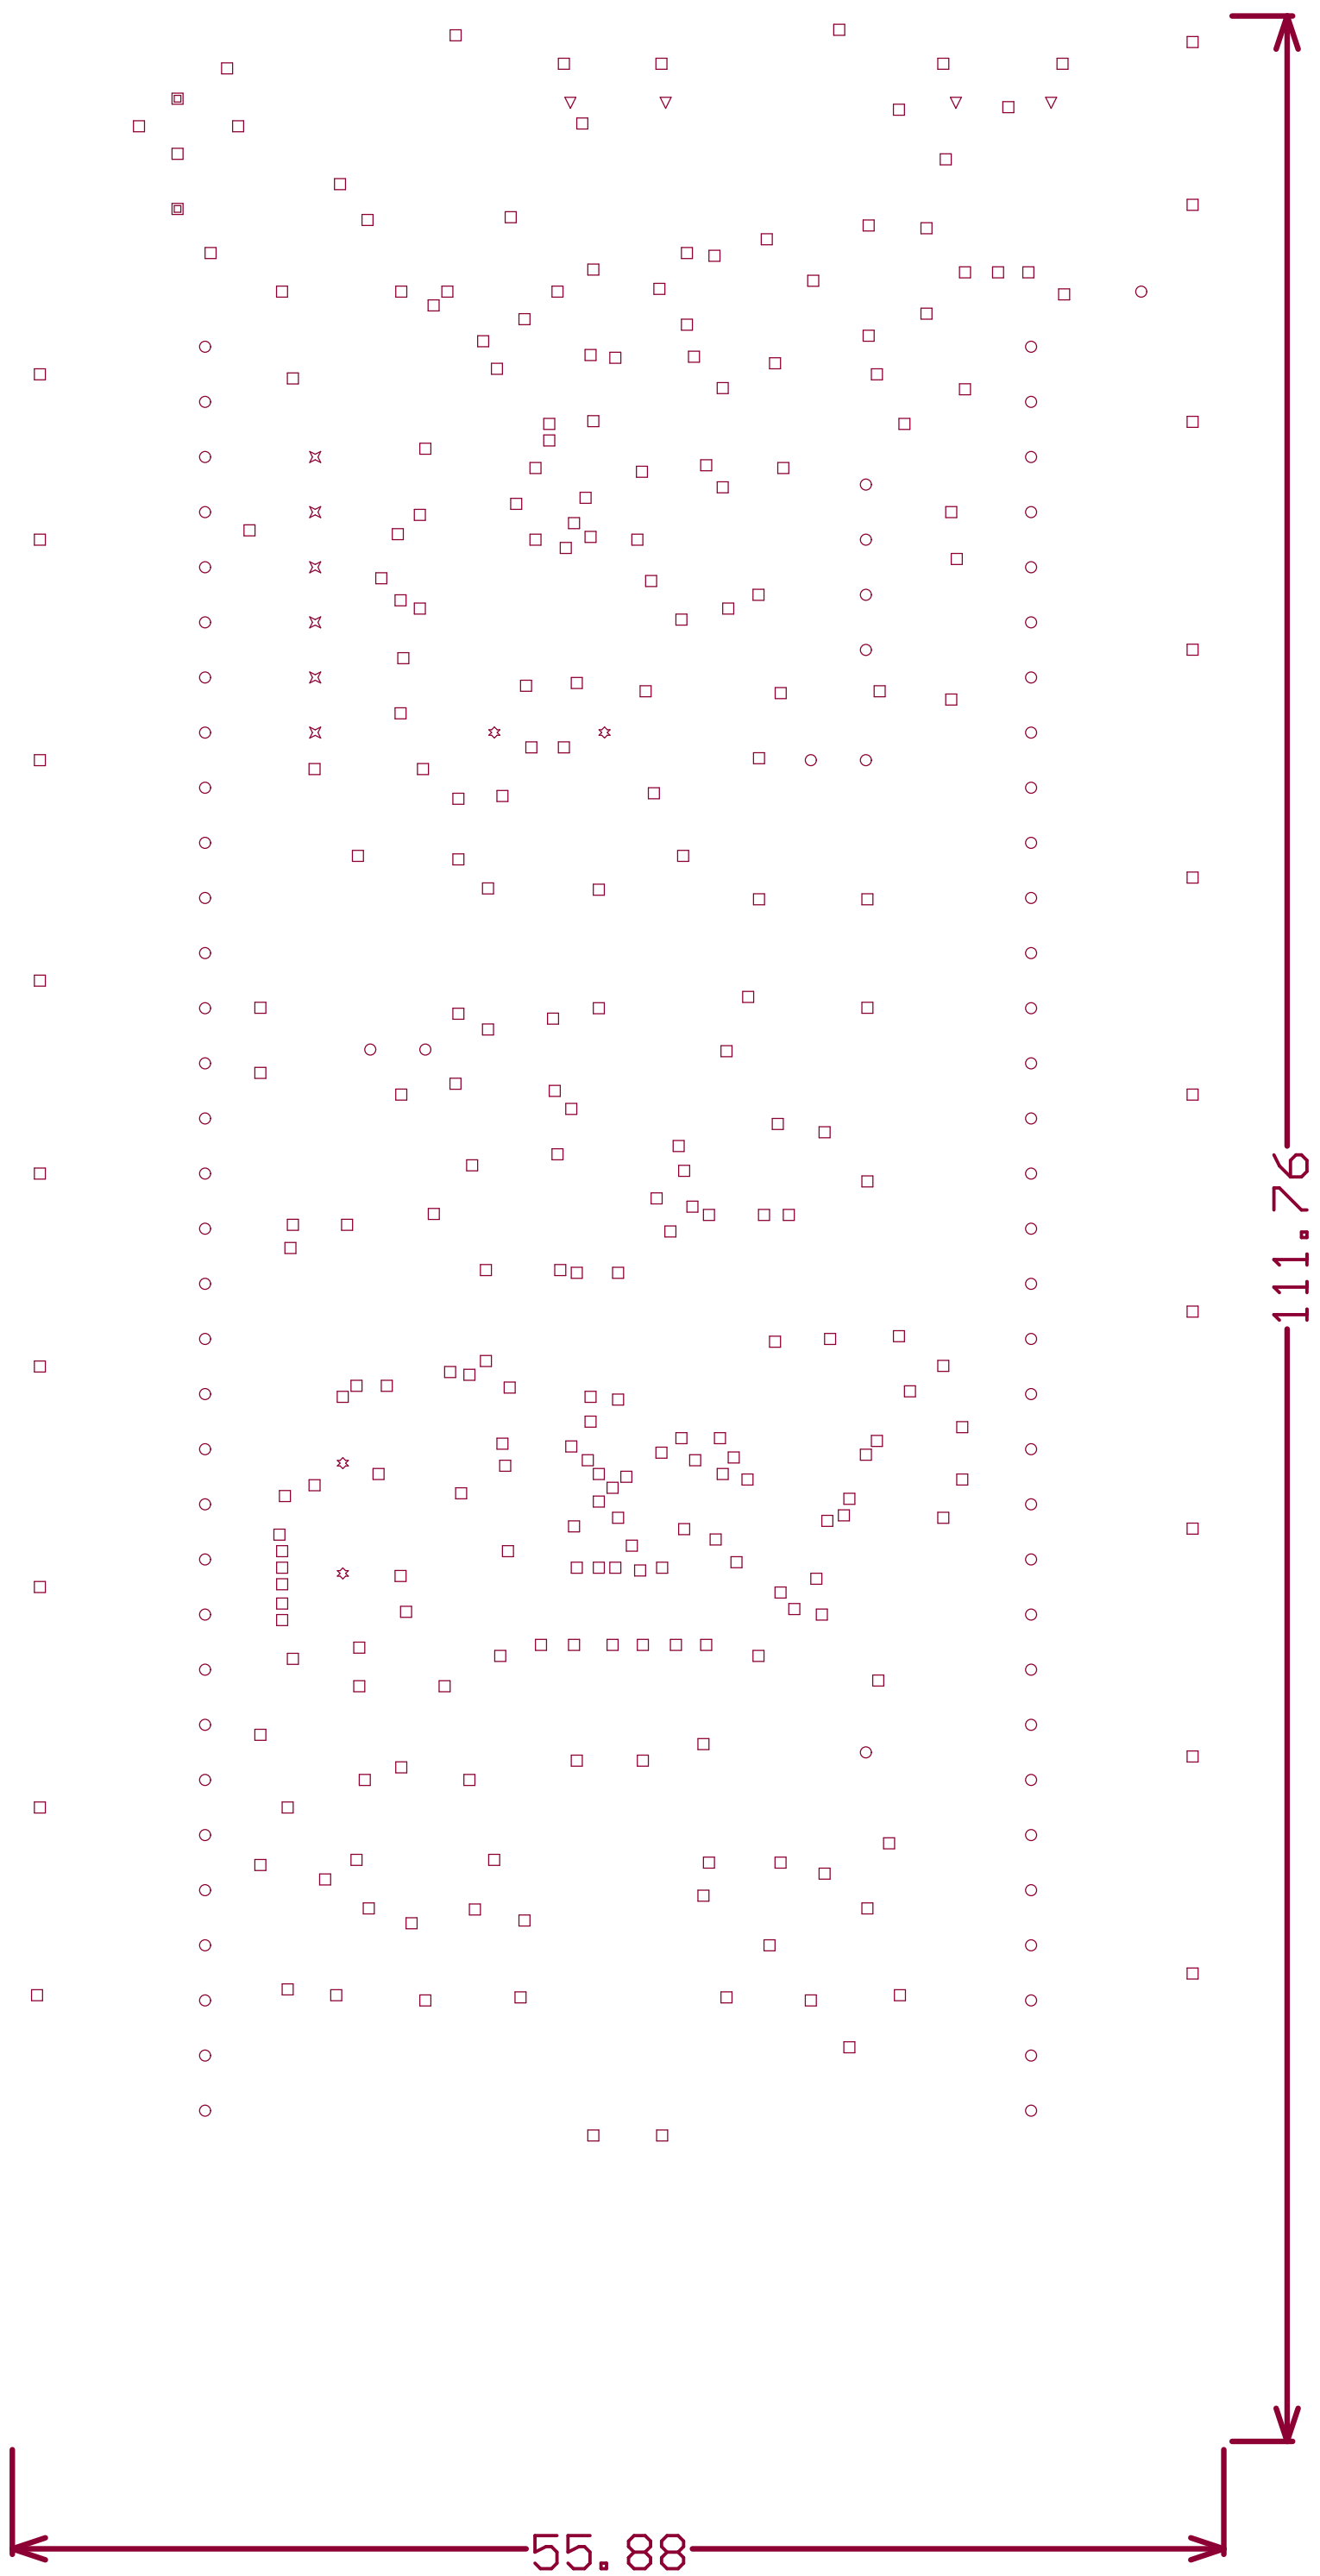

silkscreen color◻White◻soldermask color◻blue

| Layer | Name | Material | Thickness | Constant | Board Layer Stack |
|-------|----------------|---------------|-----------|-------------|-------------------|
| 1 | Top Silk | | | | |
| 2 | Top Mask | Solder Resist | 0.010mm | 3.5 | |
| 3 | TOP | Copper | 0.035mm | Cu + Plated | |
| 4 | Dielectric 1 | FR-4 | 1.465mm | 4.8 | |
| 5 | Bottom | Copper | 0.035mm | Cu + Plated | |
| 6 | Bottom Solder | Solder Resist | 0.010mm | 3.5 | |
| 7 | Bottom Overlay | | | | |