

4

3

2


1


DRILL CHART: TOP to BOTTOM					
ALL UNITS ARE IN MILS					
FIGURE	SIZE	TOLERANCE	PLATED	ROTATION	QTY
•	12.0	+3.0/-3.0	PLATED	—	143
□	40.0	+3.0/-3.0	PLATED	—	5
⬡	177.0	+3.0/-3.0	PLATED	—	4
○	40.0	+2.0/-2.0	NON-PLATED	—	2


TOTAL HOLES: 154

5 IMPEDANCE TABLE

LAYER	TRACE (mil)	SPACING (mil)	IMPEDANCE (Single end)	IMPEDANCE (Differential)	TOLERANCE
1,4	5	N/A	55 OHM	N/A	+/-10%
1,4	5.1	9.9	N/A	100 OHM	+/-10%

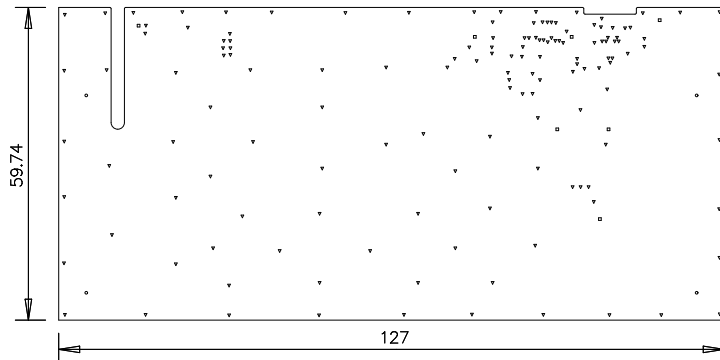

 DESIGNED BY SOFER www.sofer.com.cn Tel : +86 21 - 6482 6908 Mail: design@sofer.com.cn	LAYER: FAB DRAWING & DRILL LEGEND	COMPANY NAME: ST	
	DESIGNER: Shelley	PROJECT NAME: MB1166	
	DATE: 2014.08.27	PROJECT NUMBER: D031-013B1	REV A

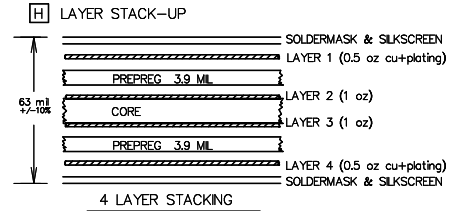

PCB SPECIFICATIONS:

- A. MATERIAL; FR-4, ☒ TG-170 ☐ TG-150 ☐ TG-140
- B. MATERIAL FAMILY; N/A.
- C. SOLDERMASK COLOR; ☐ GREEN ☒ BLUE ☐ RED ☐ BLACK
- D. SILKSCREEN COLOR; ☒ WHITE ☐ YELLOW ☐ BLACK
- E. SURFACE FINISH; ☒ ENIG ☐ IMMERSION SILVER ☐ IMMERSION TIN
☐ HASL ☐ HASL(PB-FREE) ☐ GOLDEN FINGER
- [F] IMPEDANCE CONTROL;** ☐ NO ☒ YES(SEE IMPEDANCE TABLE FOR DETAIL INFORMATION)
- G. THROUGH VIA; PLUG THE VIAS WHICH ARE COVERED WITH SOLDERMASK ONE OR TWO SIDE.
PLUG MATERIAL: ☒ SOLDERMASK ☐ NON-CONDUCTIVE EPOXY.
- [H] STACK-UP;** SEE LAYER STACK-UP SEQUENCE FOR OVERALL THICKNESS.

PCB REQUIREMENTS:

- THIS BOARD WILL CONFORM TO:
IPC-A-600. CURRENT REV., CLASS II
IPC-6012, CURRENT REV., CLASS II
- UNLESS OTHERWISE SPECIFIED ALL HOLE DIMENSIONS APPLY AFTER PLATING.
ALL HOLES SHALL BE LOCATED WITHIN .003" DIAMETER OF TRUE POSITION.
- PLATED HOLE WALL THICKNESS SHALL NOT BE LESS THAN .001 INCH MINIMUM
AVERAGE, WITH NO READING LESS THAN .0008 BY CORROSS SECTION.
- MATERIAL FR4 RATING 94V-0 MINIMUM EPOXY GLASS LAMINATE.
- BOARD SHALL BE LPI SOLDER MASKED OVER BARE COPPER BOTH SIDES PER
IPC-SM-840 CLASS II.
- SILKSCREEN SHALL BE PERMANENT NON-CONDUCTIVE INK AND WITH NO OVERLAP
ON ANY COMPONENT PAD OR THROUGH HOLE.
- MFGR. TO LEGIBLY ETCH OR STAMP/SCREEN WITH PERMANENT NON-CONDUCTIVE INK
A. U.L. CODE D. MFGR. LOGO
B. DATE CODE E. SUCCESSFUL ELECTRICAL BOARD TEST.
C. FLAMMABILITY RATING
- REMOVE THE FLASHS WHICH SMALLER THAN HOLE SIZE.
- REMOVE ALL SHAPE EDGES AND BURRS .005 MAXIMUM.
- PLEASE USE THE SUPPLIED IPC 356 NETLIST TO VERIFY BOARD BEFORE
FABRICATING BOARD.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1.0	EDITION ORIGINALE	2008-**-**	***

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS + 3 PL DECIMALS + ANGLES + FRACTIONS +	SIGNATURES	DATE	LOGO COMPANY NAME	
	DRAWN	YY-MM-DD	TITLE PROJECT NAME *	
	CHECKED	YY-MM-DD		
	ENGRG	YY-MM-DD		
	ISSUED		SIZE B	DWG NO *****
			SCALE 1:1	REV **
				SHEET 1 OF 1