

# EMF ASSESSMENT REPORT

## No. AR19-0034270-01

performed in accordance with  
EN 62311 (2008)

<b>PRODUCT</b>	Bluetooth Low Energy module on evaluation board STEVAL
<b>MODEL(s) TESTED</b>	BLUENRG-M2SP
<b>TRADE MARK(s)</b>	STMICROELECTRONICS
<b>APPLICANT</b>	STMICROELECTRONICS S.r.l. Centro Direzionale Colleoni Palazzo Andromeda 3 ~ I-20864 Agrate Brianza

Assessed by	Robertino Torri <i>[Laboratory technician]</i>	
Approved by	Giovanni Di Turi <i>[Laboratory manager]</i>	

### Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2019-02-25	First edition Digital signed - AR19-0034270-01_TR_EN 62311 _STM - BLUENRG-M2SP

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.  
This Report shall not be reproduced partially the written approval of IMQ S.p.A..  
The authenticity of this Test Report and its contents can be verified by contacting IMQ S.p.A., responsible for this Test Report.

## 1. GENERAL DATA

SAMPLE		
Samples received on	2018-12-17	(Item(s) sampled and sent by applicant)
IMQ reference samples	BEM	93653
Samples tested No.	1	
Object under analysis recognition	<b>Not carried out</b> Except where stated, characteristics of products were taken from client description and were not verified by the laboratory	
TEST LOCATION		
Testing dates	2019-02-25	
Testing laboratory.	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano	
Testing site	Viale Lombardia, 20 – I-20021 Bollate (MI)	
ENVIRONMENTAL CONDITIONING		
<i>Parameter</i>	<i>Measured</i>	
Ambient Temperature	20.4 °C	
Relative Humidity	45 %	
Atmospheric Pressure	1000 mbar	
The laboratory is monitored by a continuous environmental conditions measurements system. Temperature, humidity and pressure data are recorded on a weekly basis and stored in local archive.		
REMARKS		
Throughout this report a point is used as the decimal separator. The ability or reliability of this product to perform its intended function in a particular application has not been investigated. IMQ declines any responsibility derived from missing or wrong information provided aside by the applicant.		

## 2. REFERENCE DOCUMENT

	DOCUMENT	DATE	TITLE
<input checked="" type="checkbox"/>	EN 62311	2008	Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz to 300 GHz)
<input checked="" type="checkbox"/>	COUNCIL RECOMMENDATION 1999/519/EC	1999	COUNCIL RECOMMENDATION of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

### 3. UNIT UNDER TEST (EUT) DETAILS

#### GENERAL DATA

MODEL (basic)	Description
BLUENRG-M2SP	Kit composed by: M2SP : Bluetooth Low Energy module STEVAL : Evaluation board dongle
VARIANTS (derived)	Description
/	

MANUFACTURER	STMICROELECTRONICS
ASSEMBLY PLANT(s)	/

#### EUT IDENTIFICATION

EUT type	Bluetooth Low Energy module		
EUT use	<input type="checkbox"/> Portable <input type="checkbox"/> Mobile <input type="checkbox"/> Fixed <input checked="" type="checkbox"/> Other		
EUT single or system	<input type="checkbox"/> Single <input type="checkbox"/> System <input checked="" type="checkbox"/> Other		
EUT standing	To be integrated into final application		
Supply voltage	3 V DC (2 x AAA size alkaline battery on evaluation board)		
<b>Radio Data (necessary only for EUT with radio module)</b>			
Radio module(s) model	BLUENRG-M2SP		
Modulation	DSSS		
Number of channels	40	Channel bandwidth	2 MHz
Operating frequency	2400 ÷ 2483.5 MHz		
Antenna	Gain:	/	
	Model:	/	
	Type:	<input checked="" type="checkbox"/> Integral <input type="checkbox"/> Dedicated <input type="checkbox"/> External	
Remarks	/		

## 4. SUMMARY OF EMF ASSESSMENT RESULTS

POSSIBLE TEST CASE VERDICTS:	
Test object meets the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

BASIC RESTRICTIONS	RESULT
Human exposure to electromagnetic fields	PASS

## 5. RESULTS OF RF EXPOSURE EVALUATION

### GENERAL DESCRIPTION OF APPLIED STANDARD:

EN 62311 Generic Standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic field (0Hz to 300GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

### LIMIT

According to EN 62311, the criteria listed in the below table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in the table 2 of Council Recommendation 1999/519/EC.

Reference levels of Council Recommendation 1999/519/EC for electric, magnetic and electromagnetic fields (0Hz to 300 GHz, unperturbed rms values)				
Frequency Range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density $S_{eq}$ (W/m <sup>2</sup> )
0÷1 Hz	----	$3,2 \times 10^4$	$4 \times 10^4$	----
1÷8 Hz	10000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	----
8÷25 Hz	10000	4000/f	5000/f	----
0,025÷0,8 kHz	250/f	4/f	5/f	----
0,8÷3 kHz	250/f	5	6,25	----
3÷150 kHz	87	5	6,25	----
0,15÷1 MHz	87	0,73/f	0,92/f	----
1÷10 MHz	$87/f^{1/2}$	0,73/f	0,92/f	----
10÷400 MHz	28	0,073	0,092	2
400÷2000 MHz	$1,375 f^{1/2}$	$0,0073 f^{1/2}$	$0,0046 f^{1/2}$	f/200
2÷300 GHz	61	0,16	0,20	10

**Notes:**

- 1: f as indicated in the frequency range column
- 2: for frequencies between 100kHz and 10GHz,  $S_{eq}$ ,  $E^2$ ,  $H^2$ , and  $B^2$ , are to be averaged over any six-minuted period.
- 3: for frequencies exceeding 10 GHz,  $S_{eq}$ ,  $E^2$ ,  $H^2$ , and  $B^2$ , are to be averaged over any  $68/f^{1.05}$  minute period (f in GHz)
- 4: No E-field value is provided for frequencies < 1 Hz, which are effectively static electric fields. For most people the annoying perception of surface electric charges will not occur at field strengths less than 25 kV/m. Spark discharges causing stress or annoyance should be avoided.

### TEST METHOD:

The antenna of the product, under normal use condition, is at least 20cm. away from the body of the user. Warning statement of the user for keeping 20cm. separation distance and the prohibition of operating to a person has been printed on the user manual. So, this product under normal use is located on electromagnetic far field between the human body.

### FAR FIELD CALCULATION FORMULA:

According to EN 62311, the criteria listed in the below table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in the table 2 of Council Recommendation 1999/519/EC.

The field calculation does not take into account the antenna size, which is assumed to be a point source. An ideal isotropic antenna is used as a reference to compare the performance of practical antennas:  $P$  watts is radiated, from a point, uniformly over the surface of sphere of radius  $r$ .

The Pointing vector gives the power density:  $S = E \times H = \frac{E^2}{\eta} = \frac{P}{4\pi r^2}$

In case of multiband product with simultaneous transmission MPE limits is based on the following formula:

$$\sum_{i=1}^n \frac{S_{E_i} (\text{duty factor})}{MPE_{E_i}} < 1$$

## RF Exposure evaluation

### TECHNICAL DOCUMENTATION

Document	Reference	Standard
IMQ Test Report	No. AR19-0034273-01 of 2019-02-25	EN 300 328 V2.1.1


Frequency MHz	Max E.I.R.P. (dBm)	Max. E.I.R.P. (W)	Equivalent plane wave power density @ 20 cm (W/m <sup>2</sup> )	Limits (W/m <sup>2</sup> )
2400 ÷ 2483.5	7.99 (measured)	0.006	0.0125	10
2400 ÷ 2483.5	8.0 (declared)	0.006	0.0126	10

### RESULT OF EVALUATION


This value is less than the reference level limit.

## 6. PHOTOGRAPHIC DOCUMENTATION

### EUT IDENTIFICATION

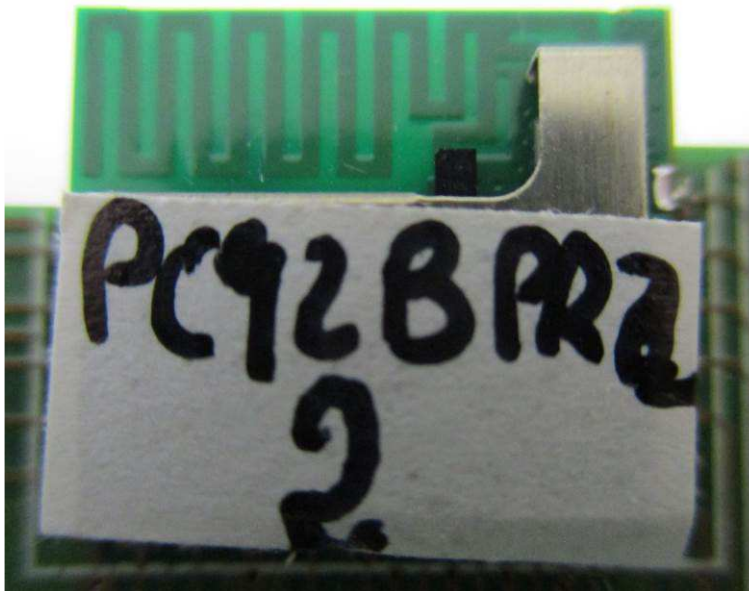

## EVALUATION BOARD with radio module

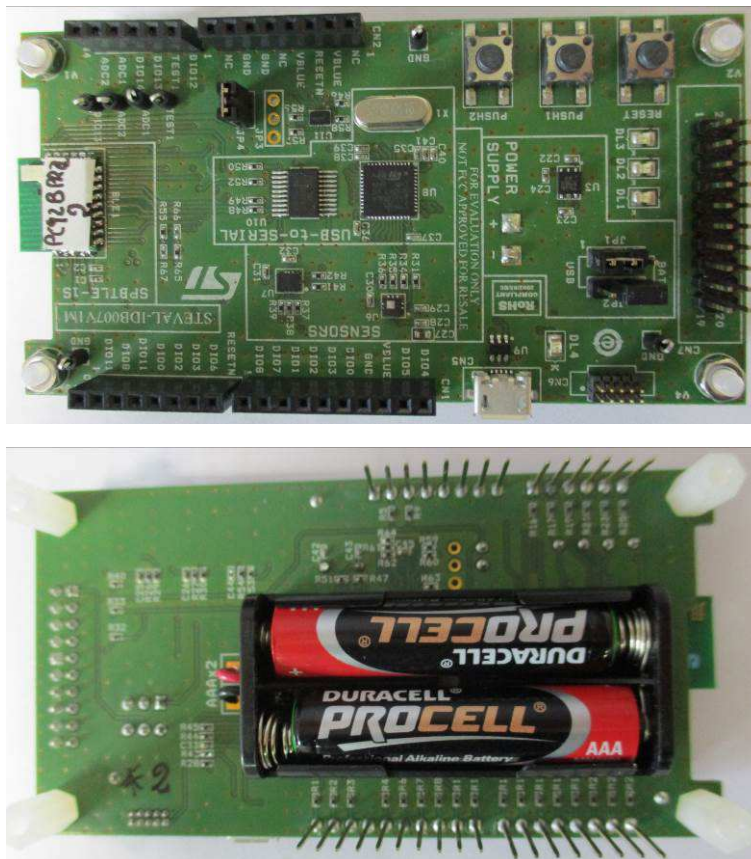

**END OF ASSESSMENT REPORT**