

65 W USB Type-C™ Power Delivery reference design based on VIPERGAN65W and STUSB4761



Features

- Input voltage range: universal AC from 90 to 264 V_{AC} with 47 Hz to 63 Hz frequency
- Maximum output power: 65 W
- Output voltage: single Type-C output 5 V_{DC}±20 V_{DC}
- Five fixed PDOs: 5 V@3 A, 9 V@3 A, 12 V@3 A, 15 V@3 A, 20 V@3.25 A
- Peak efficiency > 93%
- Support for USB Power Delivery protocol
- Key products: PowerGaN IC: VIPERGAN65W; SR IC: SRK1001

Application

- AC-DC smart chargers for smartphones, tablets, laptops, and other handheld equipment

Description

The **EVLVIPGAN65WP** is a 65 W USB Type-C® Power Delivery 3.0 adapter reference design. It is an isolated power supply with a standalone USB PD controller. The evaluation board implements at the primary side a quasi-resonant flyback converter based on the VIPERGAN65W HV converter with optocoupler feedback for voltage regulation. This controller combines a high performance low-voltage PWM controller chip with a 700V GaN HEMT in the same package. The advanced power management with the low quiescent helps to achieve low standby consumptions.

At the secondary side, to increase the system efficiency, the rectification is based on the **SRK1001** adaptive synchronous rectification controller.

Also on the secondary side, the CC/CV regulation loop to drive the power regulation stage and the USB Type-C® PD interface is based on the **STUSB4761** controller. This controller offers the benefits of a full hardware USB PD stack allowing robust, deterministic, and safe negotiation in line with USB PD standards.

The evaluation board implements a robust adapter protected for output overvoltage, output undervoltage, output over power and output short-circuit. This reference design, based on STMicroelectronics semiconductors, helps designers to develop adapters with a short bill of materials in order to obtain a cost-effective and fast design.



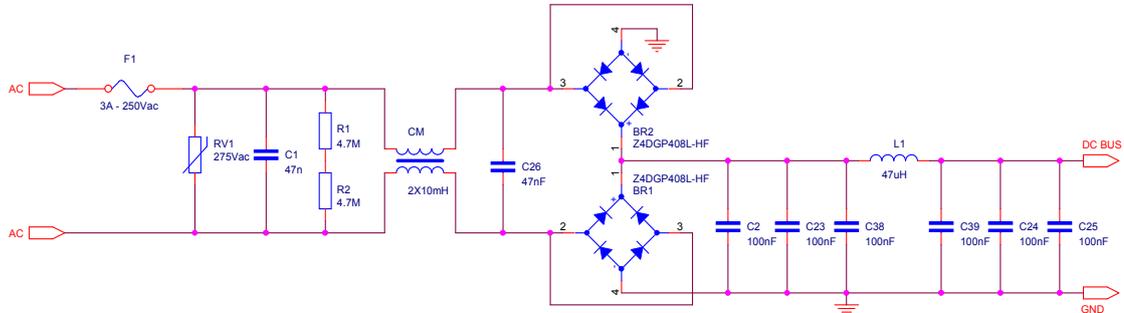
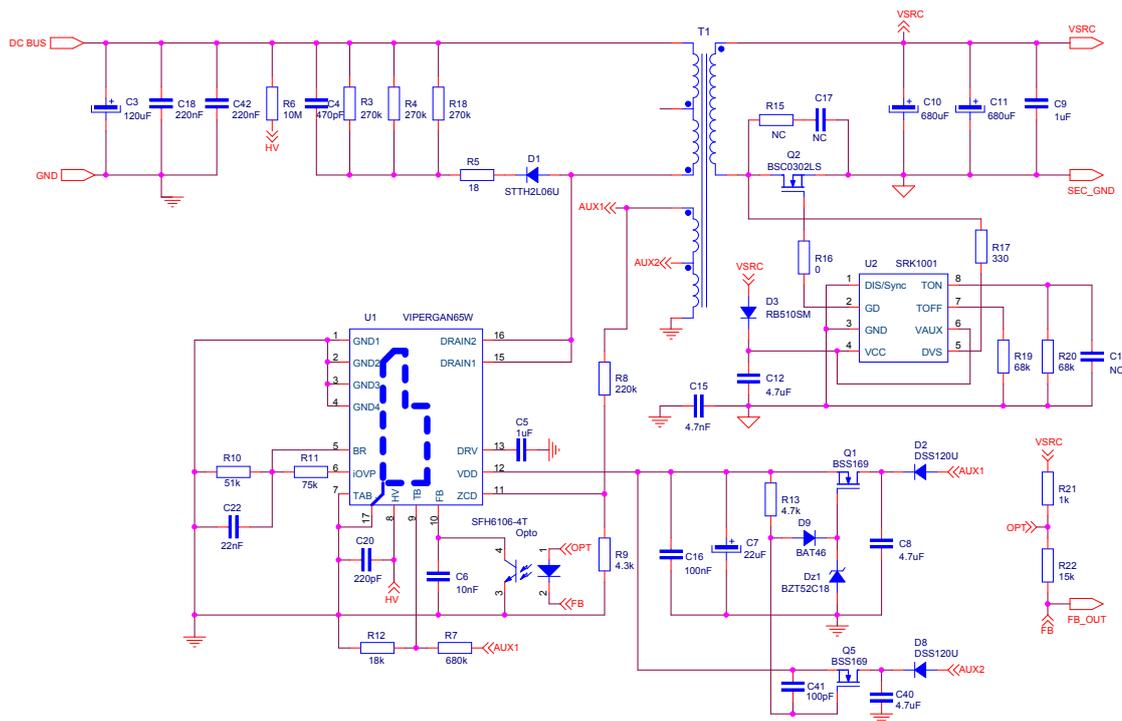
Product status link

[EVLVIPGAN65WP](#)

Product summary

65 W USB PD adaptor	EVLVIPGAN65WP
PowerGaN IC	VIPERGAN65W
Type-C and USB PD controller, programmable VBUS voltage and current protections, high-side current sensing, integrated CC/CV regulation	STUSB4761
Secondary side synchronous rectification controller optimized for flyback	SRK1001
Converter, operating frequency up to 300 kHz	

1 Schematics

Figure 1. Input board circuit schematic

Figure 2. Main board circuit schematic


2 Efficiency

Figure 4. Efficiency at 115 V_{AC}

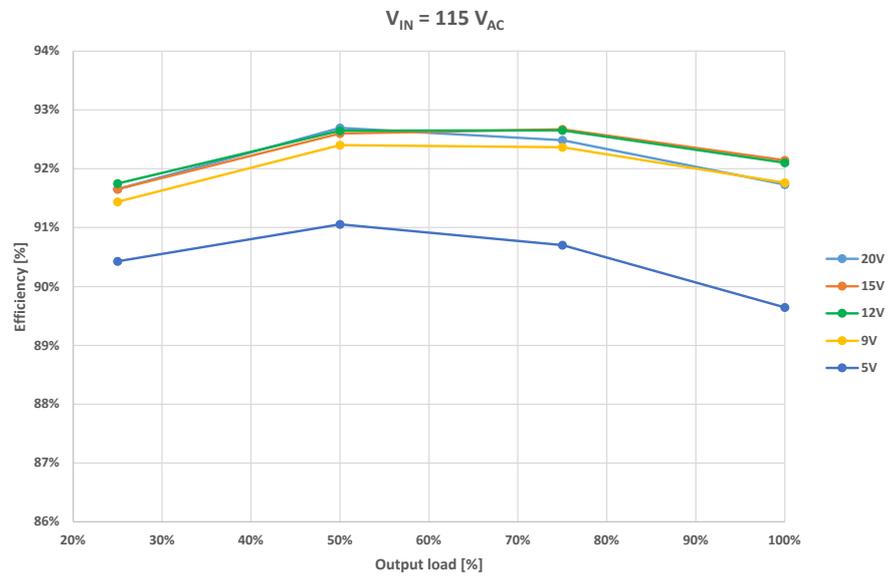
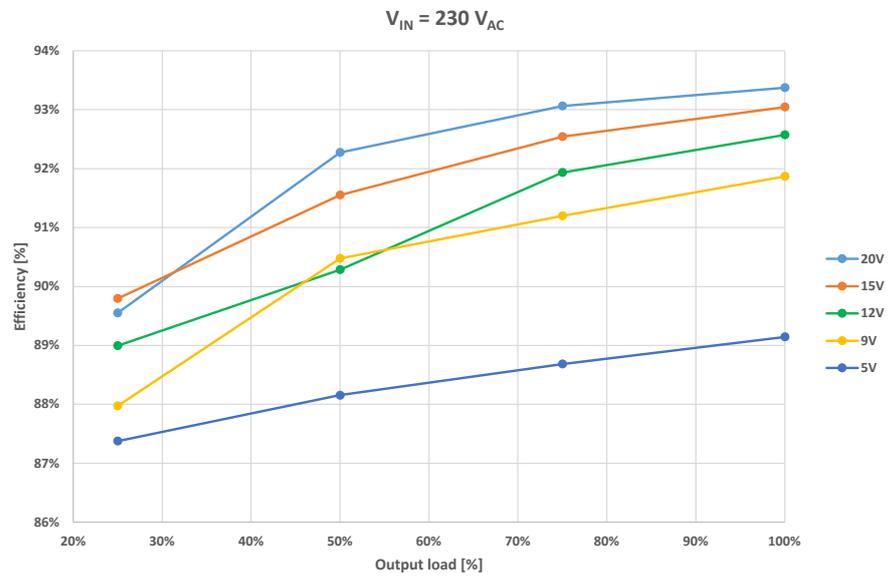


Figure 5. Efficiency at 230 V_{AC}



Revision history

Table 1. Document revision history

Date	Version	Changes
13-Feb-2025	1	Initial release.



Contents

1	Schematics	2
2	Efficiency	4
	Revision history	5
	List of tables	7
	List of figures	8



List of tables

Table 1. Document revision history 5

List of figures

Figure 1.	Input board circuit schematic	2
Figure 2.	Main board circuit schematic	2
Figure 3.	Daughterboard circuit schematic	3
Figure 4.	Efficiency at 115 V _{AC}	4
Figure 5.	Efficiency at 230 V _{AC}	4

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers’ market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 STMicroelectronics – All rights reserved