

Artificial intelligence enabler, high performance 8x8 multizone Time-of-Flight (ToF) sensor



Product status link

[VL53L8CH](#)

Features

- Compact and normalized histogram (CNH) data output for AI
 - Multizone data output up to 64 separate zones
 - Histogram output with signal count for each bin
 - Histogram size programmable up to 128 bins
 - Minimum bin width down to 37 mm
 - Maximum frequency up to 30 Hz through I²C or SPI
 - Ambient IR light level reported for each zone
 - All Time-of-Flight (ToF) processed data (distance, signal amplitude, reflectance etc.) are available, in addition to CNH
- Highly configurable CNH in order to meet user expectations
 - 64 zones with 18 bins at 15 Hz
 - 32 zones with 36 bins at 15 Hz
 - 16 zones with 48 bins at 25 Hz
- Wide ToF sensor with 65° field of view (FoV)
 - 45° x 45° square FoV (65° diagonal)
 - Autonomous low-power mode with interrupt programmable thresholds to wake up the host
 - Up to 400 cm ranging
 - Motion indicator for each zone to detect if targets have moved and how they have moved
- Fully integrated miniature module
 - Emitter: 940 nm invisible-light vertical-cavity surface-emitting laser (VCSEL)
 - Diffractive optical elements (DOE) on both transmitter and receiver enabling square FoV
 - Receiving array of single photon avalanche diodes (SPADs)
 - Low-power microcontroller running firmware
 - Size: 6.4 x 3.0 x 1.75 mm
- Easy integration
 - Single reflowable component
 - Requires 1.8 V core supply and 3.3 V AVDD supply
 - Optional 1.2 V or 1.8 V IOVDD interface voltage levels
 - I²C (up to 1 MHz) or SPI (up to 3 MHz) interface
 - Compatible with wide range of cover glass materials
 - Driver compatible with VL53L7CH
 - Pin-to-pin compatible with VL53L8CX

Application

- AI applications requiring multizone raw data
- Cup rim detection for coffee machine and beverage dispenser
- Floor sensing for robotics and vacuum cleaners
- Gesture motion and hand posture recognition
- People counting for smart building and smart home

Description

The VL53L8CH is the perfect Time-of-Flight sensor enabling AI applications, with enhanced performance under ambient light with a wide 65° diagonal FoV. The compact and normalized histogram (CNH) innovative data output is specially designed for artificial intelligence (AI) applications requiring multizone raw data from a high performance multizone ToF sensor.


The IR signal measured in each zone is sent as raw data to the host through each bin of the histogram. Highly configurable, the user can program the resolution of the VL53L8CH up to 64 zones (8x8 zones), modify the histogram resolution up to 128 bins, and define the bin width. All this CNH data is transmitted to the host through I²C or SPI, up to 30 Hz, in addition to the standard processed data of the ToF sensor (ranging distance, signal level, reflectance etc.).

The CNH data transform STMicroelectronics Time-of-Flight ranging sensor into a versatile optical sensor, which can enable endless AI-based applications. This CNH raw data sent to the host, on top of the standard ranging data, opens the door to many new applications beyond simple distance measurements. From solid material (carpet, wood, glass, mirror...) to gas or liquid (water, oil, chemical...), it becomes possible to detect the location and the size of a cup in a coffee machine or beverage dispenser, to sense the floor material for robotics, and develop advanced shape, motion, or hand posture recognition.

The VL53L8CH integrates a powerful new generation VCSEL, and two advanced metasurface lenses. The integrated VCSEL emits fully invisible 940nm IR light, which is Class 1 certified and safe for the eyes.

1 System block diagram

Figure 1. VL53L8CH block diagram

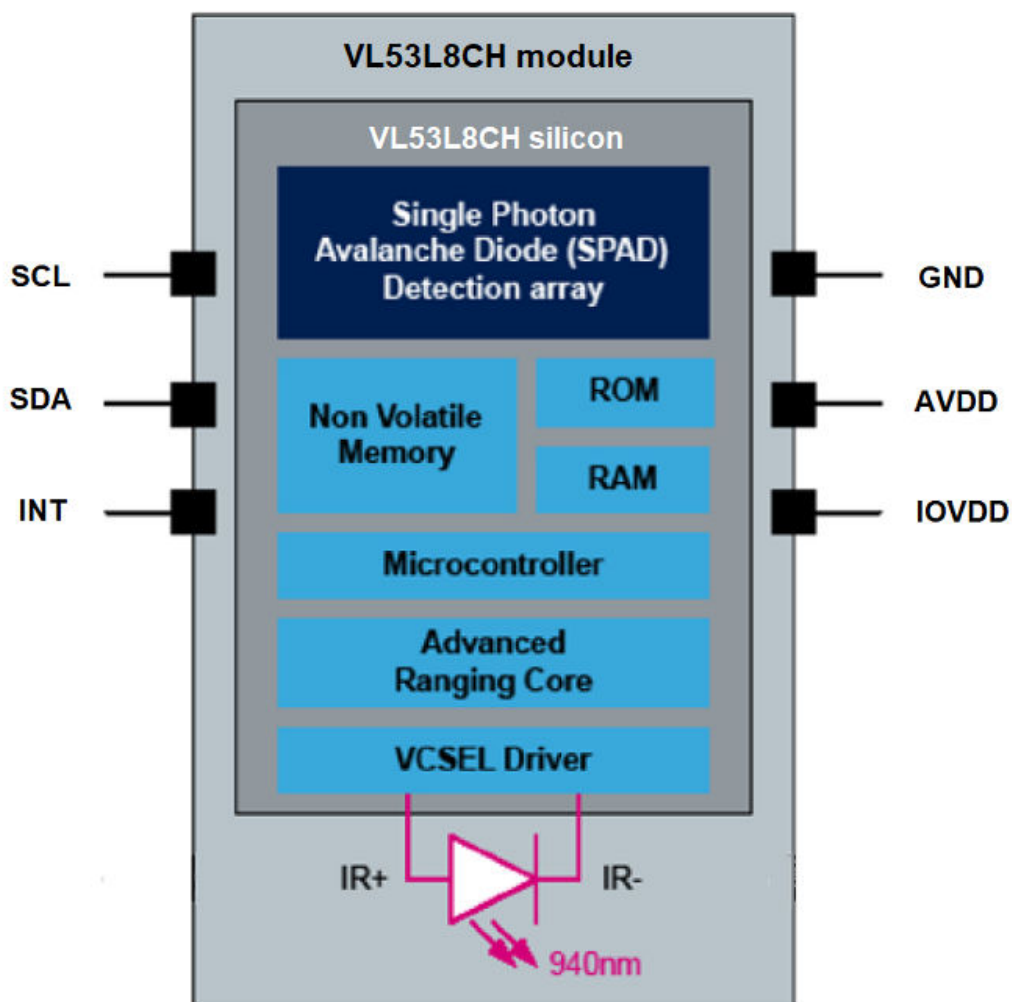

Revision history

Table 1. Document revision history

Date	Version	Changes
08-Jun-2023	1	Initial release
29-Jul-2025	2	Updated <i>cover image</i> .

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved