

| | | | |
|---|---------------------------|-----------|--------|
|  <div data-bbox="488 98 536 264"> I Q R </div> | IBIS QUALITY REPORT | date | 1 (10) |
| | | 29-Sep-22 | |

IBIS Quality Report

| | |
|----------------|--------------------|
| Company: | STMicroelectronics |
| IBIS file name | m95p16_so8_3v3.ibs |
| IBIS Version: | 4.0 |

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 2 (10) |
| | | 29-Sep-22 | |

Contents

1. MODELING.....
1.1 Component description.....
1.2 Modeling conditions
1.3 Circuit for data extraction
2. IBISCHK6 CHECK
2.1 Result Check by IBISCHK6
3. FUNCTIONAL CHECK.....
3.1 Functional verification.....
4. EXTRA INFORMATION

3
3
3
5
6
6
8
8
10

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 3 (10) |
| | | 29-Sep-22 | |

1. MODELING

IBIS (I/O, Buffer, Information, Specification) provide a standardized way, officially EIA standard 656-A-1999 and IEC 62014-1, to model behaviorally a digital component input, output and I/O buffers.

1.1 Component description

| Component name | Technology | Component description |
|----------------|------------|--|
| M95P16 | CMOS | The M35P16 is a 16Mbit serial SPI page EEPROM with dual quad output. |

1.2 Modeling conditions

| | |
|----------------|------------------------------|
| Simulator used | AMS 2018.2 (Mentor Graphics) |
|----------------|------------------------------|

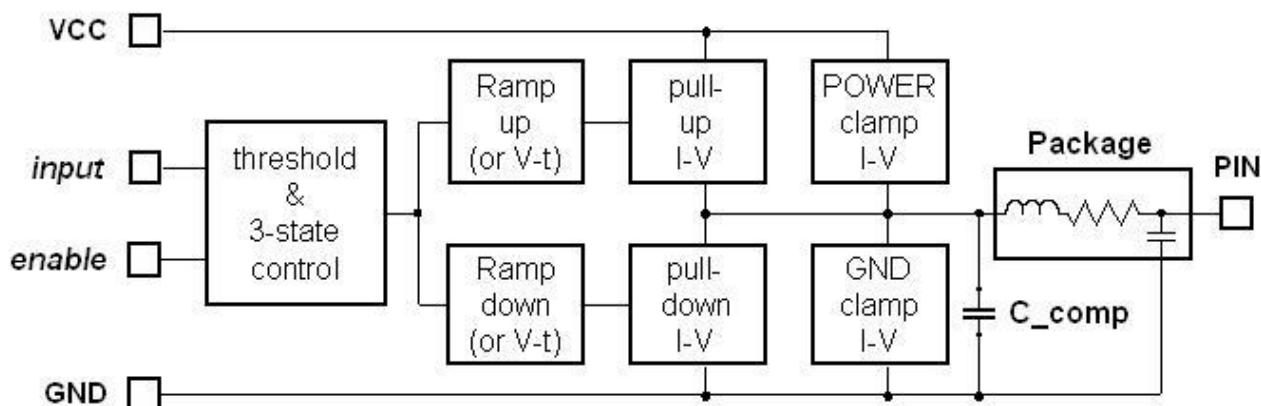


Figure 1: IBIS model generic structure

| conditions | Typical | Minimum | Maximum |
|-----------------------|---------|---------|---------|
| Temperature [C°] | 25 | -40 | 85 |
| Voltage Supply [Volt] | 3.30 | 3.00 | 3.60 |
| Process setting | nom | weak | strong |

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 4 (10) |
| | | 29-Sep-22 | |

| Model names (of Component) | Model Type | C_comp (typ, min, max) |
|--------------------------------------|-------------------|--|
| mod_s | Input | 1.030pF (typ), 0.988pF(min) , 1.160pF(max) |
| mod_c | Input | 1.030pF (typ), 0.988pF(min) , 1.160pF(max) |
| mod_q_xy | Output | 1.400pF (typ), 1.337pF(min) , 1.466pF(max) |
| mod_dwh_xy | I/O | 1.607pF (typ), 1.535pF(min) , 1.683pF(max) |

| Model names (of Component) | Threshold and Vmeas | Timing parameters (if used) |
|--------------------------------------|---------------------------------|------------------------------------|
| mod_s | Vinl=1.000V , Vinh=2.300V (typ) | |
| mod_c | Vinl=1.000V , Vinh=2.300V (typ) | |
| mod_dwh_xy | Vinl=1.000V , Vinh=2.300V (typ) | |
| mod_dwh_xy | Vmeas=1.650V (typ) | Cref=50pF |

| Package | Description |
|----------------|--------------------|
| SO8N Package | 8 leads SO8N |

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 5 (10) |
| | | 29-Sep-22 | |

1.3 Circuit for data extraction

The I-V data are extracted by simulations using the simulation setup shown in figure 2 below. This model is an I/O model, other model type derived from this structure. For more accurate modeling, certain combinations of V-T tables are recommended (with exception of Input-only model types) using the simulation setup shown in figure 3, with load conditions specified.

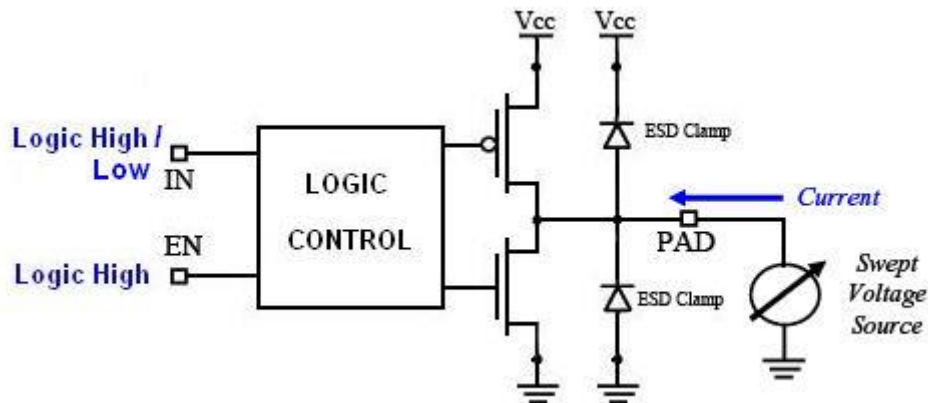


Figure 2: Simulation Setup to extract **I/V** data from I/O model type

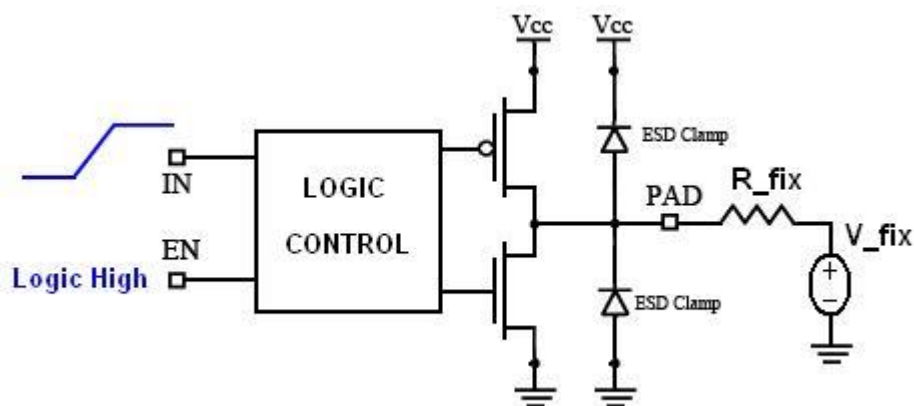


Figure 3: Simulation Setup to extract **V/T** data from I/O model type (see also Table 1)

| V/T data condition extractions | Load conditions |
|---------------------------------------|---|
| Rising waveform | $R_{fix}=50\text{ Ohm}$, $V_{fix}= 0.0\text{ V}$ |
| Rising waveform | $R_{fix}=50\text{ Ohm}$, $V_{fix}= 3.3\text{ V}$ |
| Falling waveform | $R_{fix}=50\text{ Ohm}$, $V_{fix}= 3.3\text{ V}$ |
| Falling waveform | $R_{fix}=50\text{ Ohm}$, $V_{fix}= 0.0\text{ V}$ |

Table 1: V/T curve extraction load conditions

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 6 (10) |
| | | 29-Sep-22 | |

2. IBISCHK6 CHECK

The created IBIS model must be checked using IBISCHK6 parser to ensure that the syntax is correct. The result of the check is showed in the next section with some comments (optional).

2.1 Result Check by IBISCHK6

IBISCHK6 V6.0.1

Checking m95p16_so8_3v3.ibs for IBIS 4.2 Compatibility...

NOTE (line 326) - Pulldown Maximum data is non-monotonic
NOTE (line 293) - Pulldown Maximum data is non-monotonic
NOTE (line 294) - Pulldown Typical data is non-monotonic
NOTE (line 295) - Pulldown Minimum data is non-monotonic
NOTE (line 392) - Pullup Maximum data is non-monotonic
NOTE (line 394) - Pullup Typical data is non-monotonic
NOTE (line 394) - Pullup Minimum data is non-monotonic
NOTE (line 1200) - Pulldown Maximum data is non-monotonic
NOTE (line 1201) - Pulldown Typical data is non-monotonic
NOTE (line 1202) - Pulldown Minimum data is non-monotonic
NOTE (line 1298) - Pullup Maximum data is non-monotonic
NOTE (line 1299) - Pullup Typical data is non-monotonic
NOTE (line 1300) - Pullup Minimum data is non-monotonic
NOTE (line 2110) - Pulldown Maximum data is non-monotonic
NOTE (line 2111) - Pulldown Typical data is non-monotonic
NOTE (line 2112) - Pulldown Minimum data is non-monotonic
NOTE (line 2208) - Pullup Typical data is non-monotonic
NOTE (line 2208) - Pullup Maximum data is non-monotonic
NOTE (line 2209) - Pullup Minimum data is non-monotonic
NOTE (line 3009) - Pulldown Maximum data is non-monotonic
NOTE (line 3010) - Pulldown Typical data is non-monotonic
NOTE (line 3011) - Pulldown Minimum data is non-monotonic
NOTE (line 3108) - Pullup Typical data is non-monotonic
NOTE (line 3108) - Pullup Maximum data is non-monotonic
NOTE (line 3109) - Pullup Minimum data is non-monotonic
NOTE (line 4098) - Pulldown Maximum data is non-monotonic
NOTE (line 4099) - Pulldown Typical data is non-monotonic
NOTE (line 4100) - Pulldown Minimum data is non-monotonic
NOTE (line 4196) - Pullup Typical data is non-monotonic
NOTE (line 4196) - Pullup Maximum data is non-monotonic
NOTE (line 4197) - Pullup Minimum data is non-monotonic
NOTE (line 4970) - Pulldown Maximum data is non-monotonic
NOTE (line 4971) - Pulldown Typical data is non-monotonic
NOTE (line 4972) - Pulldown Minimum data is non-monotonic
NOTE (line 5068) - Pullup Typical data is non-monotonic

| | | | |
|--|----------------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 7 (10) |
| | | 29-Sep-22 | |

NOTE (line 5068) - Pullup Maximum data is non-monotonic
 NOTE (line 5069) - Pullup Minimum data is non-monotonic
 NOTE (line 5889) - Pulldown Maximum data is non-monotonic
 NOTE (line 5890) - Pulldown Typical data is non-monotonic
 NOTE (line 5891) - Pulldown Minimum data is non-monotonic
 NOTE (line 5989) - Pullup Typical data is non-monotonic
 NOTE (line 5989) - Pullup Minimum data is non-monotonic
 NOTE (line 5989) - Pullup Maximum data is non-monotonic
 NOTE (line 6763) - Pulldown Maximum data is non-monotonic
 NOTE (line 6764) - Pulldown Typical data is non-monotonic
 NOTE (line 6765) - Pulldown Minimum data is non-monotonic
 NOTE (line 6863) - Pullup Typical data is non-monotonic
 NOTE (line 6863) - Pullup Maximum data is non-monotonic
 NOTE (line 6864) - Pullup Minimum data is non-monotonic
 Errors : 0

File Passed

| |
|---|
| Adding comments about the Warning or Note: |
| <p>The output check contains some Notes about non-monotonic data of I-V curves, but they are not indicative of problems inside the model.</p> |

| | | | |
|--|---------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 8 (10) |
| | | 29-Sep-22 | |

3. FUNCTIONAL CHECK

The created IBIS model must be compared with the Original Buffer circuit. The signal outputs, in the same load conditions (Figure 4), must match. These output comparisons are presented in TYP, MIN and MAX condition. This section cannot be defined for Input and Terminator model type, because they are input-only model types.

| How well results are matched? | Put “X” into the right filed |
|---|------------------------------|
| Curves shape match correctly, but there is a little time translation. | |
| Curves shape match correctly, but there is a mismatch into the Overshoot and/or Undershoot regions. | |
| Curves match well. | X |

3.1 Functional verification

Circuit used for output comparison results is illustrated in figure 4.

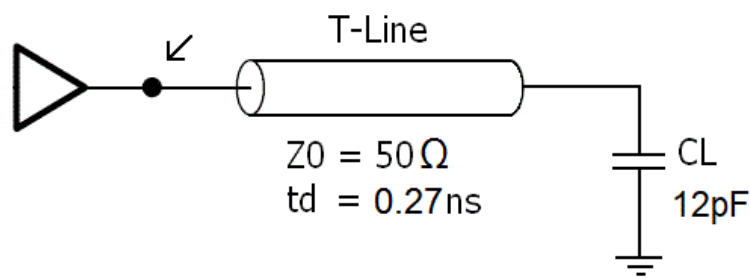


Figure 4: Circuit used for functional check

| | | | |
|--|---------------------|-----------|--------|
| | IBIS QUALITY REPORT | date | 9 (10) |
| | | 29-Sep-22 | |

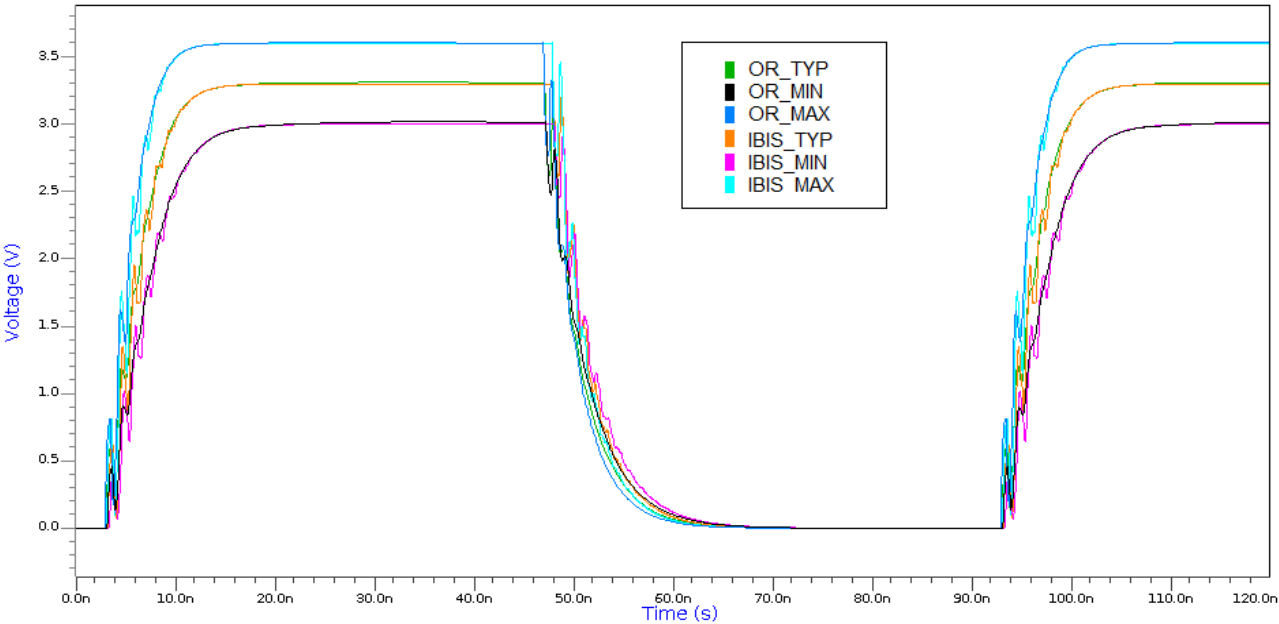


Figure 6: IBIS vs Eldo comparison results of “mod_q_00” Model

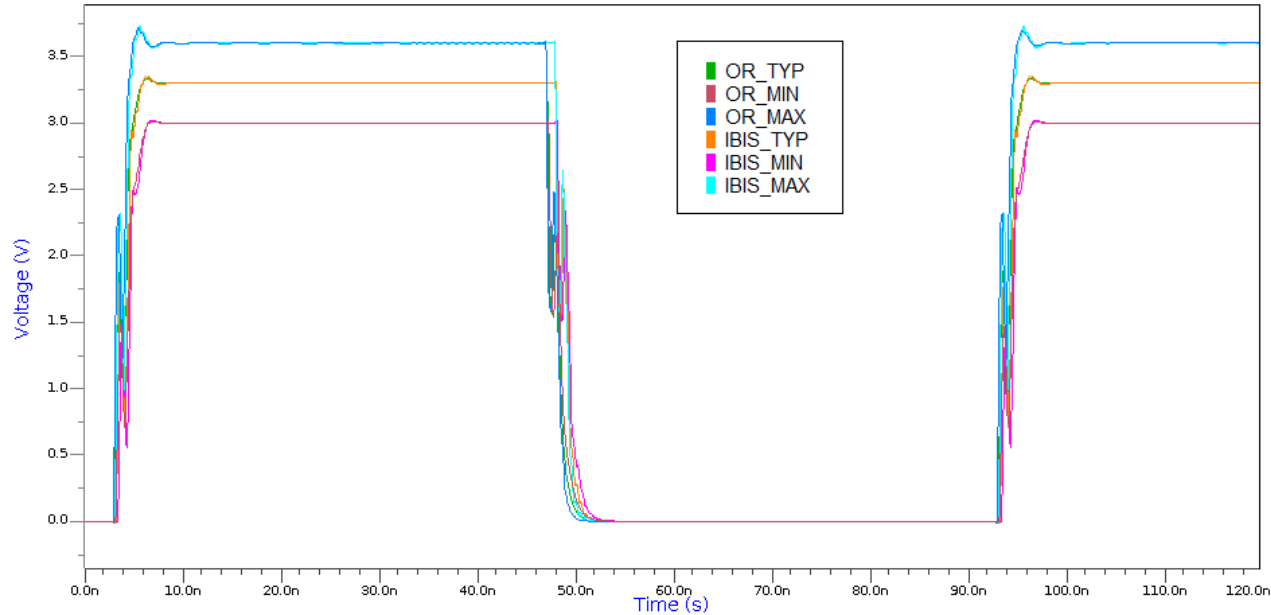


Figure 7: IBIS vs Eldo (original) comparison results of “mod_dwh_10” Model

Output Comparisons:

| |
|---------------------------------------|
| Adding comments about the comparison: |
| |

| | | | |
|--|----------------------------|-----------|---------|
| | IBIS QUALITY REPORT | date | 10 (10) |
| | | 29-Sep-22 | |

4. EXTRA INFORMATION

This section can contain other extra information, to explain some other features of peculiar IBIS model

| Other specifications | description |
|-----------------------------|--------------------|
| | |