


FABRICATION NOTES :

- 1:FABRICATE USING LATEST REVISION OF STM SPECIFICATION.
- 2:FABRICATE USING MASTER ARTWORK STEVAL-LVLP01 FOR CIRCUIT PATTERN.
NO DEVIATION FROM MASTER ARTWORK ARE PERMITTED WITHOUT WRITTEN APPROVAL FROM AN AUTHORIZED "CLIENT NAME" REPRESENTATIVE.
- 3:VENDOR MUST BE UL QUALIFIED AND BOARDS MUST BE IDENTIFIED WITH APPROPRIATE VENDOR UL IDENTIFICATION MARK, LOT OR JOB NUMBER AND PCB MATERIAL FLAMMABILITY RATING (94V-0) MINIMUM.
- 4:MATERIAL - FR4 RoHS COMPLIANT MINIMUM 170 C (High Tg)
SEE "Cross Section Chart" FOR BOARD THICKNESS, COPPER WEIGHT AND LAYER CONSTRUCTION.
- 5:BLUE SOLDER MASK BOTH SIDE OF BOARD WITH LIQUID PHOTO IMAGEABLE SOLDERMASK.
- 6:FINISH - ENIG Au:0.2u Ni:4u
- 7:FOR SMT COMPONENTS WITH PIN PITCH OF 0.019 INCH OR MORE NO GANG RELIEF OF SOLDER MASK IS ALLOWED.
- 8:SILKSCREEN TO BE WHITE, NON CONDUCTIVE, EPOXY INK OR EQUIVALENT.
- 9:THIS IS NOT A CONTROLLED IMPEDANCE BOARD.
- 10:DESIGNATED AREA OR INSPECTED MANUFACTURER LOGO AND PCB TYPE
11:ON SMB PCB MUST BE IDENTIFIED MANUFACTURER LOGO AND PCB TYPE
(MEANS OF MATERIAL TYPE INDICATED ON THE YELLOW CARD DOCUMENT).
- 12:TEARDROPPING OF VIAS AND PADS ALLOWED AT PAD TO TRACE INTERSECTION
TO INSURE A 2 MILS ANULAR RING AT THE JUNCTION.
- 13:REMOVE SILKSCREEN FROM SOLDERABLE SURFACES.
- 14:ALL BOARD TO BE 100% ELECTRICALLY NETLIST TESTED FOR OPENS AND ON SHORTS-APPLY TEST STAMP IN REFERENCED AREA.
- 15:THIS BOARD SHALL BE FULLY COMPLIANT WITH UL796.

DRILL CHART: TOP to BOTTOM			
ALL UNITS ARE IN MILS			
FIGURE	FINISHED_SIZE	PLATED	QTY
A	11.81	PLATED	335
B	27.56	PLATED	164
C	35.43	PLATED	32
D	55.0	PLATED	5
E	92.52	NON-PLATED	2
F	125.98	NON-PLATED	4

TOTAL HOLES: 542

Finished Hole Tolerance - All units are in Inches -		
Finish Hole Diameter	Plated Through Finish Hole Diameter	Non Plated Through Finish Hole Diameter
0.008"-0.013"	+0.002/-FHS"	+/-0.002"
0.014"-0.063"	+/-0.003"	+/-0.002"
0.064"-0.156"	+/-0.004"	+/-0.003"
0.157"-0.250"	+/-0.007"	+/-0.004"
0.251"-and up	+/-0.007"	+/-0.005"
0.125"	Non Plated Only	+0.003/-0.000"

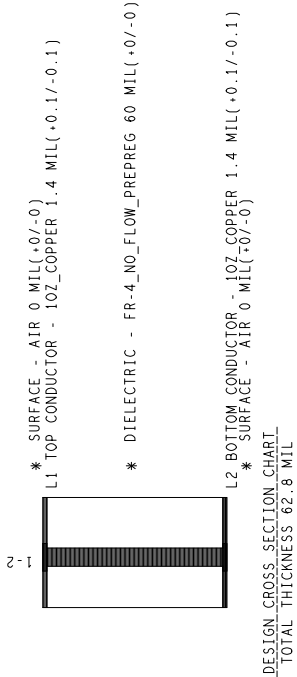

REVISION DATE



AMS Group AGRATE B. ITALY

ALL RIGHTS STRICTLY RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION FROM STMicreoelectronics.

Drawn RIGO M. date 05-July-22

Approved date

Description

DRILLING AND PROFILING

Symbol


STDRIIVE101

Group

STEVAL-LVLP01

TOLERANCE UNLESS NOTED

UNIT=MM



Material

ANG.

LES.

>10

>50

>200

>30

>1

>1.0

>1.0