



DRILL CHART: TOP to BOTTOM ALL UNITS ARE IN MILLIMETERS				
FIGURE	SIZE	TOLERANCE	PLATED	QTY
.	0.1999	+0.05/-0.05	PLATED	74
■	0.3302	+0.05/-0.05	PLATED	26
○	0.889	+0.05/-0.05	PLATED	8
⊙	1.0	+0.05/-0.05	PLATED	1
⊖	1.5748	+0.08/-0.08	PLATED	2
◇	2.54	+0.08/-0.08	PLATED	2
△	3.2512	+0.08/-0.08	NON-PLATED	2

#### PCB TECHNICAL SPECIFICATIONS:

- Single unit size: 46.7x21.8 mm
- Whole panel size (2x5 units + external free strips): 103.4 x 119.0 mm
- Total board thickness: 1.6mm
- 6 Copper layers PCB
- Inner/Outer Layers Copper thickness: 35um
- Finishing: Chemical Flash Gold (Au 0.02-0.05um)
- PCB material: FR4
- Drills tollerances (if not specified): +/-0.08mm
- Solder Mask: both sides - green
- Silkscreen: both sides - white

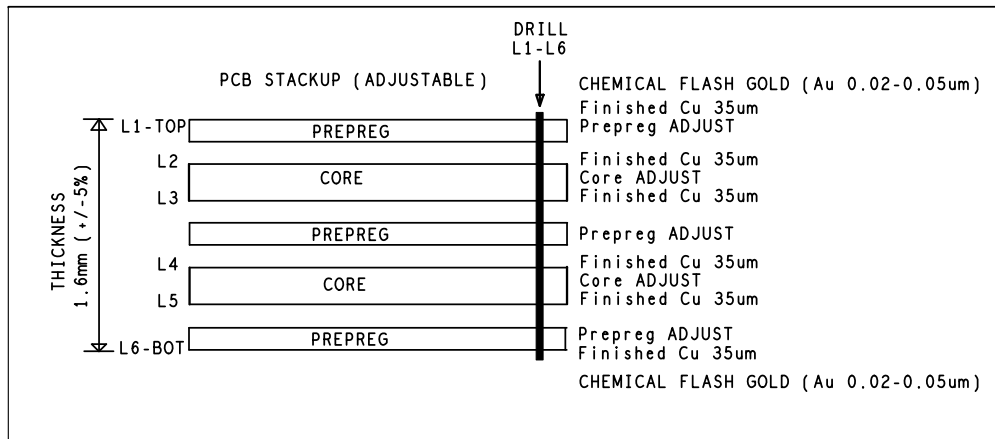

	SCALE:	REV: 0
	DESIGNER: 2BiTS	DATE: 13/02/2017
	SHEET:	
ST Microelectronics	DESCRIPTION: STEVAL-POE001V1 DAUGHTER BOARD	
DRILL CHART AND PCB CPECIFICATION	P.C.B. 2B20170123 R.0	