
50 kPa temperature compensated pressure sensor



MPXV2050GP
CASE 1369

Features

- Ratiometric to Supply Voltage
- Temperature Compensated over 0 °C to 85 °C
- Gauge Ported

Applications

- Level Indicators
- Medical Diagnostics
- Robotics
- Pressure Switching
- Pump/Motor Controllers
- Non-Invasive Blood Pressure Measurement

Description

The MPXV2050GP device is a silicon piezoresistive pressure sensor providing a highly accurate and linear voltage output directly proportional to the applied pressure. The sensor is a single monolithic silicon diaphragm with the strain gauge and a thin-film resistor network integrated on-chip. The chip is laser trimmed for precise span and offset calibration and temperature compensation.

1 Ordering Information


Table 1. Ordering options

Ordering Information										
Device name	Package options	Case number	Number of ports				Pressure type			Device marking
			None	Single	Dual	Gauge	Differential	Absolute		
MPXV2050GP	Tray	<u>1369</u>		•		•				MPXV2050GP

2 Block Diagram

Figure 1 shows a block diagram of the internal circuitry on the stand-alone pressure sensor chip.

Figure 1. Temperature compensated pressure sensor schematic

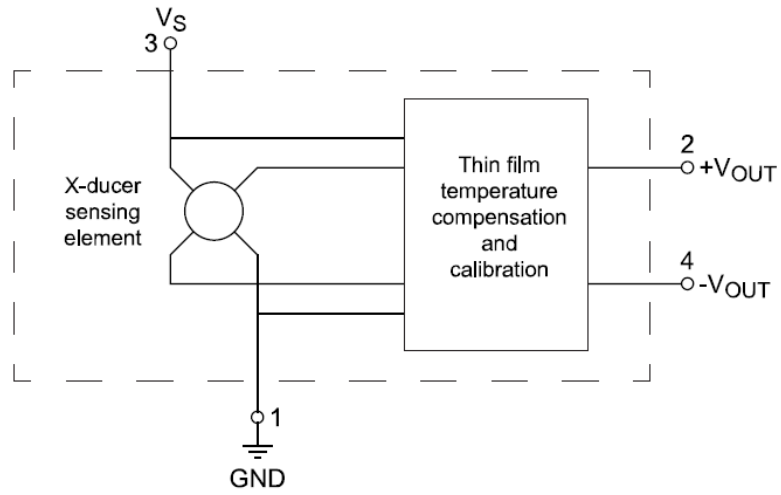


aaa-038712

3 Pin Information

3.1 MPXV2050GP

Figure 2. Case 1369-01



aaa-037857

Symbol	Pin	Description
GND	1	Ground
+V _{OUT}	2	+ Voltage output
V _S	3	Power supply
-V _{OUT}	4	- Voltage output
n.a.	5	—
n.a.	6	—
n.a.	7	—
n.a.	8	—

4 Maximum Ratings

Table 3. Maximum ratings [1]

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
P _{max}	Overpressure	P1 > P2	—	—	200	kPa
T _{stg}	Storage Temperature		-40	—	+125	°C
T _A	Operating Temperature		-40	—	+125	°C

[1] Exposure beyond the specified limits may cause permanent damage or degradation to the device

5 Operating Characteristics

Table 4. Operating Characteristics ($V_S = 10$ Vdc, $T_A = 25^\circ$ C unless otherwise noted, $P1 > P2$)

Characteristic		Symbol	Min	Typ	Max	Unit
Operating Pressure Range	[1]	P_{OP}	0	—	50	kPa
Supply Voltage	[2]	V_S	—	10	16	Vdc
Supply Current		I_o	—	6.0	—	mAdc
Full Scale Span	[3]	V_{FSS}	38.5	40	41.5	mV
Offset	[4]	V_{off}	-1.0	—	1.0	mV
Sensitivity		$\Delta V/\Delta P$	—	0.8	—	mV/kPa
Linearity	[5]	—	-0.3	—	0.3	% V_{FSS}
Pressure Hysteresis (0 kPa to 50 kPa)	[5]	—	—	± 0.1	—	% V_{FSS}
Temperature Hysteresis (-40 °C to 125 °C)	[5]	—	—	± 0.5	—	% V_{FSS}
Temperature Coefficient of Full Scale Span	[5]	TCV_{FSS}	-1.0	—	1.0	% V_{FSS}
Temperature Coefficient of Offset	[5]	TCV_{off}	-1.0	—	1.0	mV
Input Impedance		Z_{in}	1000	—	2500	Ω
Output Impedance		Z_{out}	1400	—	3000	Ω
Response Time (10% to 90%)	[6]	t_R	—	1.0	—	ms
Warm-Up Time	[7]	—	—	20	—	ms
Offset Stability	[8]	—	—	± 0.5	—	% V_{FSS}

1. 1.0 kPa equals 0.145 PSI.
2. Device is ratiometric within this specified excitation range. Operating the device above the specified excitation range may induce additional error due to device self-heating.
3. Full Scale Span (V_{FSS}) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.
4. Offset (V_{off}) is defined as the output voltage at the minimum rated pressure.
5. Accuracy (error budget) consists of the following:
 - Linearity: Output deviation from a straight line relationship with pressure, using the end point method, over the specified pressure range.
 - Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
 - Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure, at 25 °C.
 - TcSpan: Output deviation at full rated pressure over the temperature range of 0 °C to 85 °C, relative to 25 °C
 - TcOffset: Output deviation with minimum rated pressure applied, over the temperature range of 0 °C to 85 °C, relative to 25 °C
6. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.
7. Warm-Up Time is defined as the time required for the product to meet the specified output voltage after the pressure has been stabilized.
8. Offset Stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure Temperature Cycling with Bias test.

6 Characteristics

6.1 Voltage output versus applied differential pressure

The output voltage of the differential or gauge sensor increases with increasing pressure applied to the pressure side (P1) relative to the vacuum side (P2). Similarly, output voltage increases as increasing vacuum is applied to the vacuum side (P2) relative to the pressure side (P1).


6.2 On-chip temperature compensation and calibration

Figure 3 shows the typical output characteristics of the MPXV2050G series at 25 °C.

The effects of temperature on full scale span and offset are very small and are shown under [Section 8 "Operating Characteristics"](#).

This performance over temperature is achieved by having both the shear stress strain gauge and the thin-film resistor circuitry on the same silicon diaphragm. Each chip is dynamically laser trimmed for precise span and offset calibration and temperature compensation.

Figure 3. Output vs. pressure differential

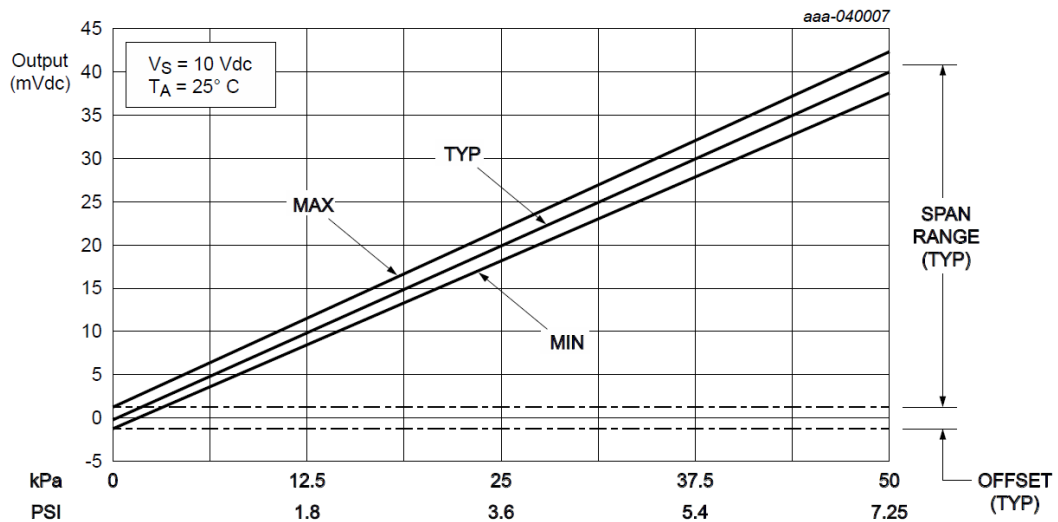

6.3 Linearity

Linearity refers to how well a transducer's output follows the equation


$V_{out} = V_{off} + \text{Sensitivity} \times P$ over the operating pressure range (Figure 4). There are two basic methods for calculating nonlinearity:

- End point straight line fit
- Least squares best line fit

While a least squares fit gives the "best case" linearity error (lower numerical value), the calculations required are burdensome.

Conversely, an end point fit will give the "worst case" error (often more desirable in error budget calculations) and the calculations are more straightforward for the user.

ST's specified pressure sensor linearities are based on the end point straight line method measured at the midrange pressure.

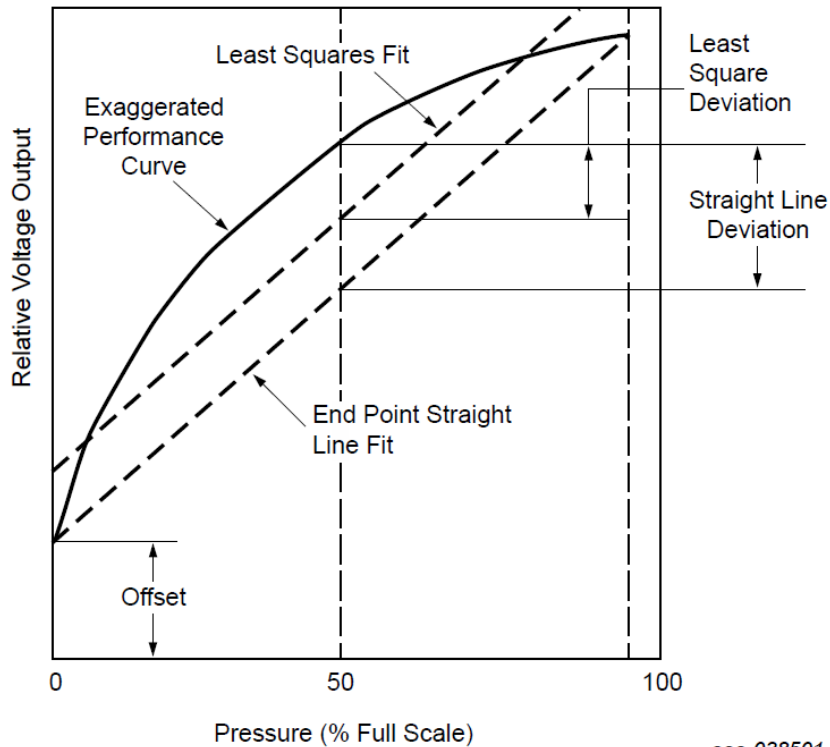Figure 4. Linearity specification comparison


aaa-038501

6.4 Pressure (P1) / Vacuum (P2) side identification

ST designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing silicone gel that isolates the die from the environment. The ST MPX pressure sensor is designed to operate with positive differential pressure applied, $P1 > P2$.

The Pressure (P1) side may be identified by using [Table 5](#).

Table 5. Pressure (P1) side delineation table

Part Number	Case Type	Pressure (P1) Side Identifier
MPXV2050GP	1369	side with port attached


6.5 Media compatibility

[Figure 5](#) illustrates the gauge configuration in a typical chip carrier. A silicone gel isolates the die surface and wire bonds from the environment while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPXV2050G series pressure sensor operating characteristics, internal reliability and qualification tests are based on the use of dry clean air as the pressure medium. Media other than dry clean air may have adverse effects on sensor performance and long term reliability. Contact the factory for information regarding media compatibility in your application.

For more information, refer to application note [AN3728](#).

Figure 5. Small outline package — cross-sectional diagram (not to scale)

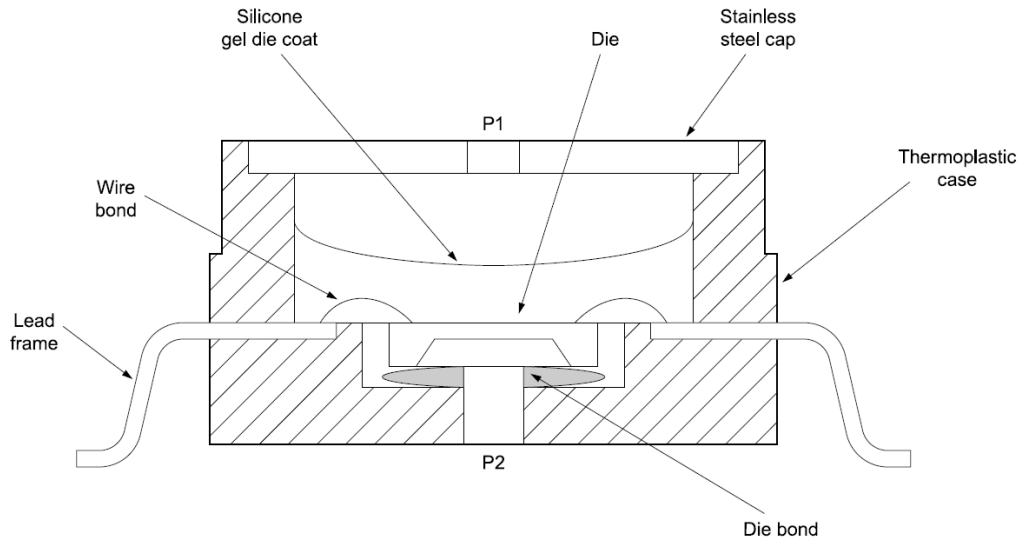


7 Package Outlines

Package dimensions are provided in package drawings. To find the most current package outline drawing, go to <https://www.st.com/> and perform a keyword search for the drawing's document number.

7.1 Small outline packages

Figure 6. SOT1693-3 (Case 1369-01) – Page 1

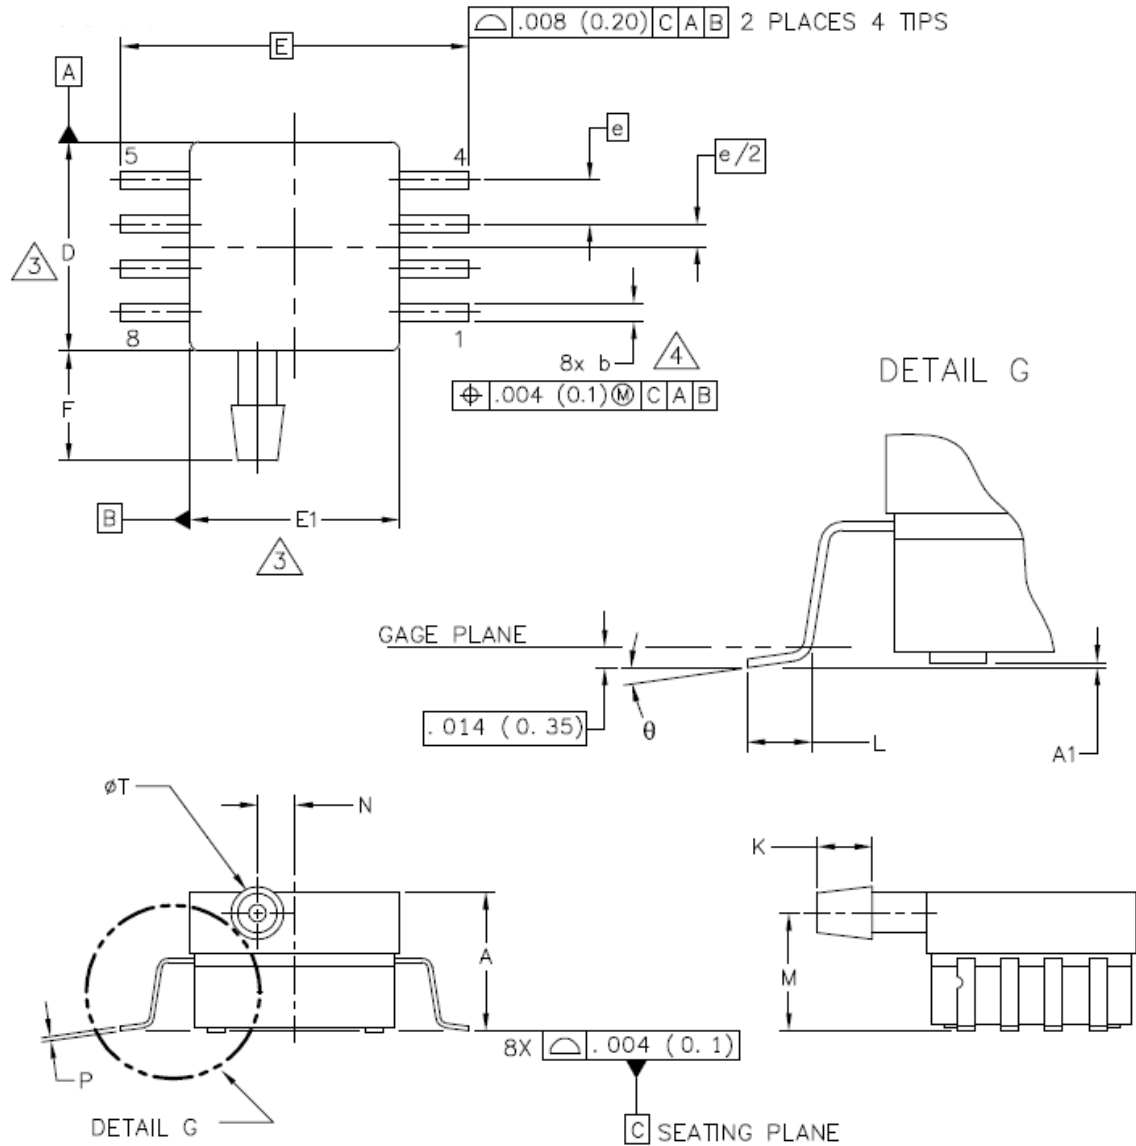

	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE: 8 LD SOP, SIDE PORT	DOCUMENT NO: 98ASA99303D	REV: E
	STANDARD: NON-JEDEC	
	SOT1693-3	14 MAR 2016

Figure 7. SOT1693-3 (Case 1369-01) – page 2

NOTES:

1. CONTROLLING DIMENSION: INCH

2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M–1994.

⚠ DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.

⚠ DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR
PROTRUSION SHALL BE .008 (0.203) MAXIMUM.

DIM	INCHES		MILLIMETERS		DIM	INCHES		MILLIMETERS		
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX	
A	.300	.330	7.62	8.38	θ	0°	7°	0°	7°	
A1	.002	.010	0.05	0.25	—	---	---	---	---	
b	.038	.042	0.96	1.07	—	---	---	---	---	
D	.465	.485	11.81	12.32	—	---	---	---	---	
E	.717 BSC		18.21 BSC		—	---	---	---	---	
E1	.465	.485	11.81	12.32	—	---	---	---	---	
e	.100 BSC		2.54 BSC		—	---	---	---	---	
F	.245	.255	6.22	6.47	—	---	---	---	---	
K	.120	.130	3.05	3.30	—	---	---	---	---	
L	.061	.071	1.55	1.80	—	---	---	---	---	
M	.270	.290	6.86	7.36	—	---	---	---	---	
N	.080	.090	2.03	2.28	—	---	---	---	---	
P	.009	.011	0.23	0.28	—	---	---	---	---	
T	.115	.125	2.92	3.17	—	---	---	---	---	
					MECHANICAL OUTLINE		PRINT VERSION NOT TO SCALE			
TITLE:					DOCUMENT NO: 98ASA99303D		REV: E			
8 LD SOP, SIDE PORT					STANDARD: NON-JEDEC					
					SOT1693-3		14 MAR 2016			

Revision history

Table 1. Document revision history

Date	Revision	Changes
26-Jun-2026	1	Initial release from ST, rebranded NXP document

Contents

1	Ordering Information	2
2	Block Diagram	3
3	Pin Information	4
3.1	MPXV2050GP	4
4	Maximum Ratings	5
5	Operating Characteristics	6
6	Characteristics	7
6.1	Voltage output versus applied differential pressure	7
6.2	On-chip temperature compensation and calibration	7
6.3	Linearity	7
6.4	Pressure (P1) / Vacuum (P2) side identification	8
6.5	Media compatibility	8
7	Package Outlines	10
7.1	Small outline packages.....	10
	Revision history	12

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers’ market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 STMicroelectronics – All rights reserved